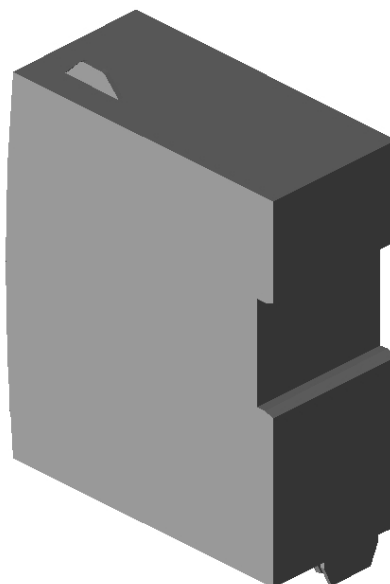



c430 Controller**C43AE50E00A11000AS**

Note: The model shown is a simplified representation. Minor deviations may occur.

17007689_3D.stp
17007689_datatable.csv
17007689_datatable.xls

3D Handling Commands**Technical product information**


Controller	c430 Controller
Processor	ARM 9 800 MHz
Active memory	2 GB
Operating system	RT LINUX
Program memory	300 MB
Retentive memory	500 KB
Input voltage	24V DC
Fieldbus network 1	Ethernet-Switch
Runtime	FAST Runtime
Visualization	FAST UI Runtime
Application Credit	1000
Application Credit type	EPCZEMSD0L1100
Enclosure	IP20
Market approval US,CD	cULus
Weight / unit	0.447 KG

Dimensions

The dimensions in mm apply to:

	c430
Weight	0.3 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

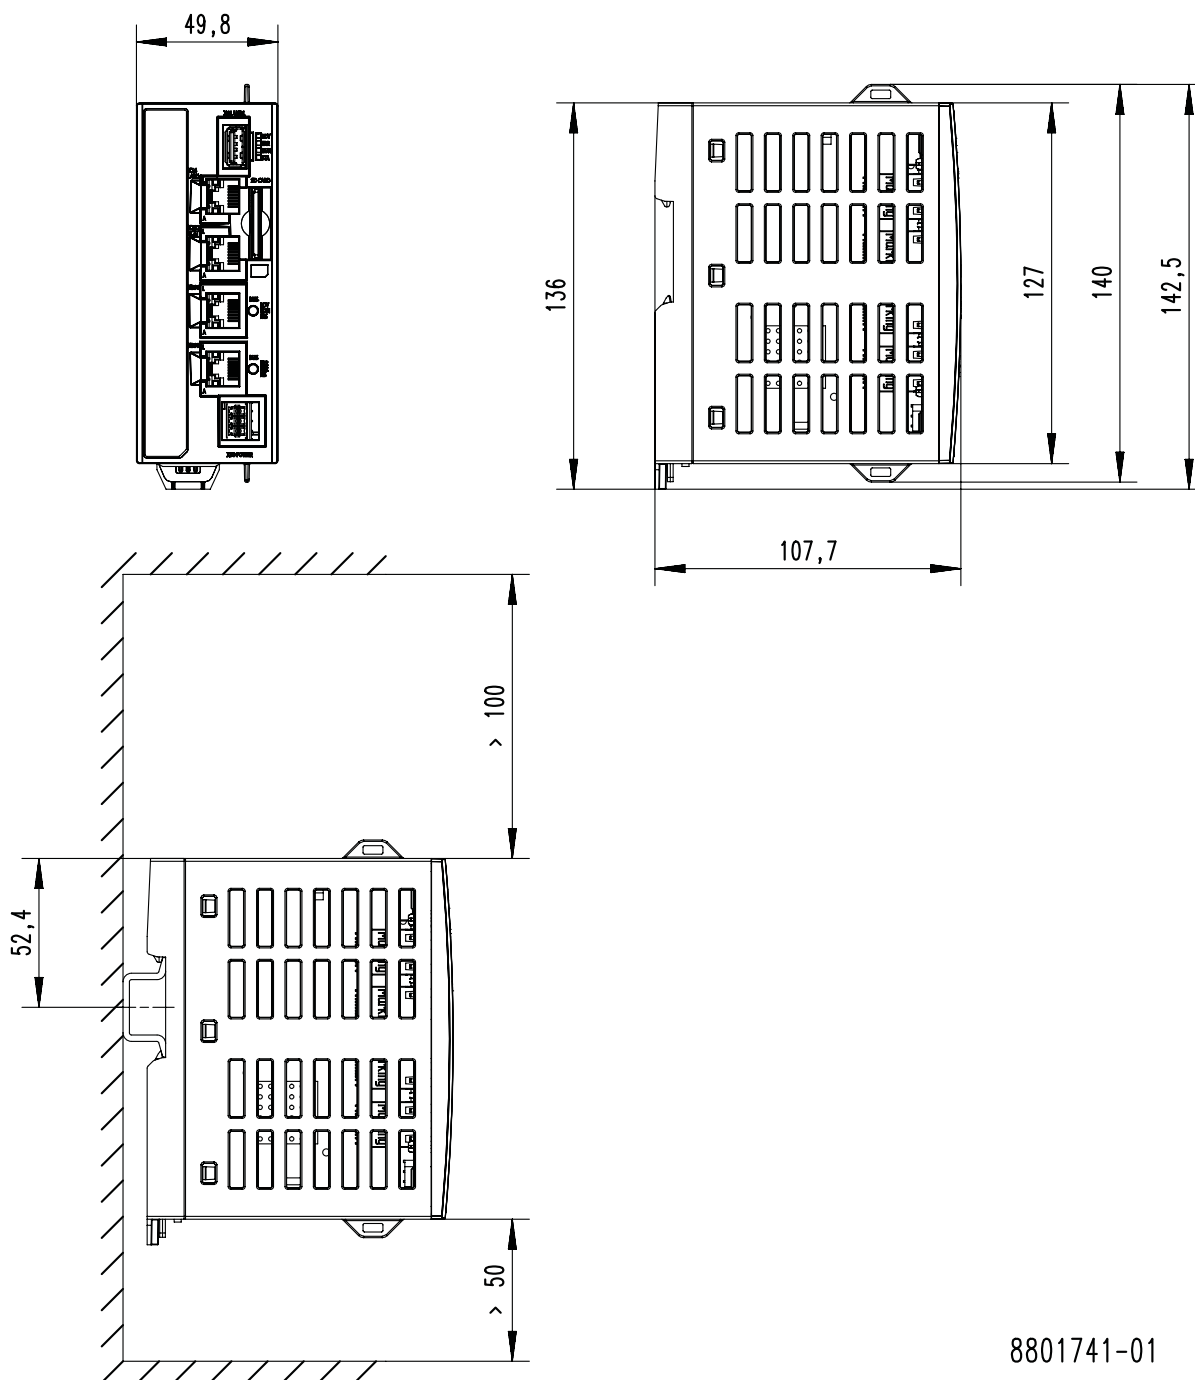


8801741-01

Dimensions

The dimensions in inch apply to:

	c430
Weight	0.3 kg

Note: The specified installation clearances are minimum dimensions to ensure a sufficient air circulation for cooling purposes. They do not consider the bend radiuses of the connecting cables.

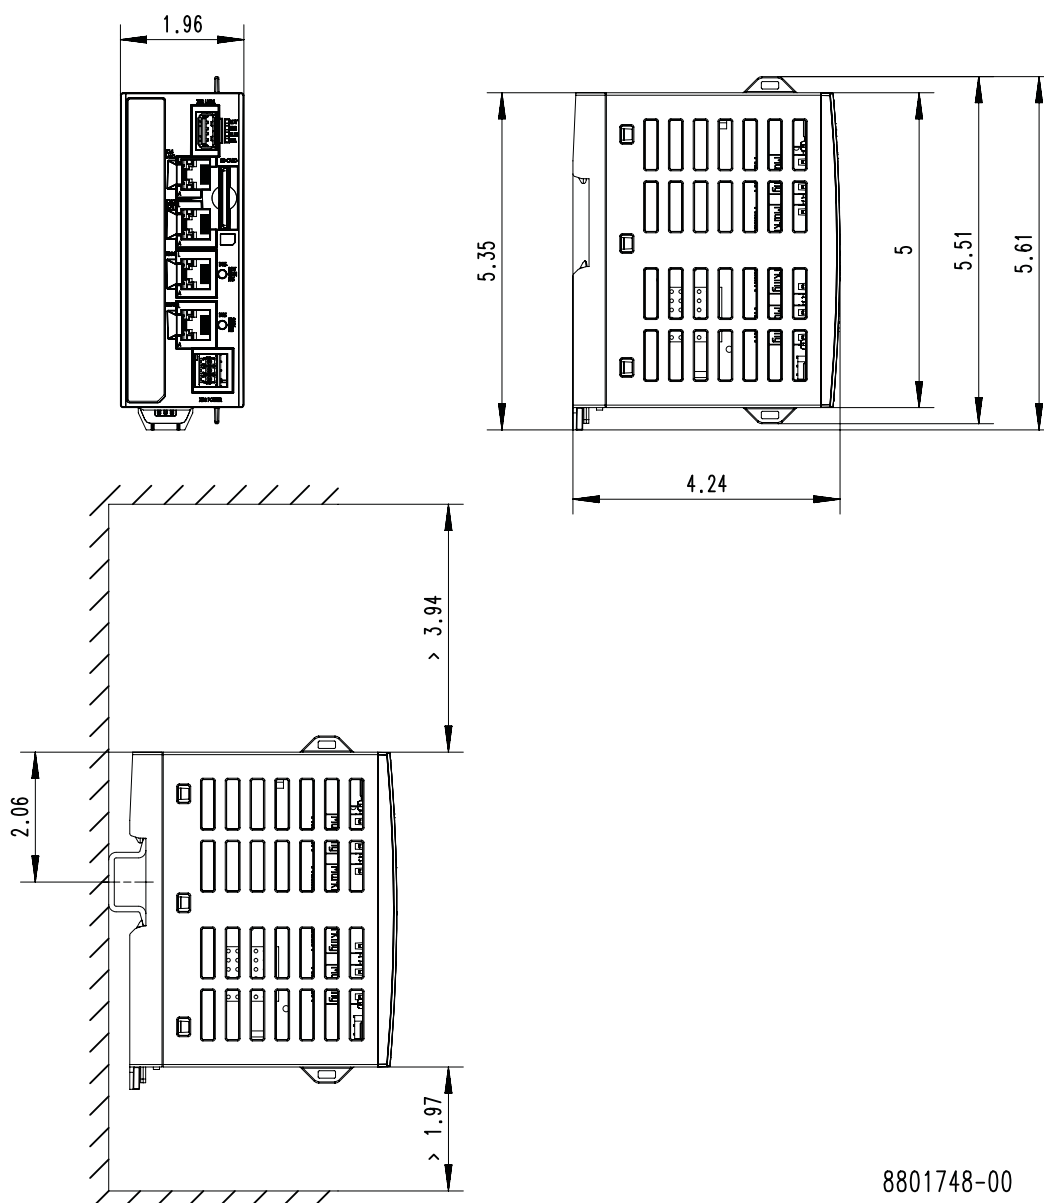

8801748-00