

IE2/IE3 m550-H/m550-P three-phase AC motors



Contents

1	About this document	6
1.1	Document description	6
1.2	Further documents	7
1.3	Notations and conventions	8
2	Product information	9
2.1	Product description	9
2.2	Identification of the products	10
2.3	Features	11
2.4	The modular system	12
2.4.1	Mounting positions	15
3	Safety instructions	17
3.1	Basic safety instructions	17
3.2	Application as directed	18
3.3	Foreseeable misuse	19
3.4	Residual hazards	20
4	Information on project planning	22
4.1	General information	22
4.2	Drive dimensioning	24
4.3	Final configuration	27
4.3.1	Surface and corrosion protection	27
4.3.2	Temperature ranges	28
5	Mechanical installation	29
5.1	Important notes	29
5.2	Transport	30
5.3	Installation	31
6	Electrical installation	32
6.1	Important notes	32
6.2	Preparation	33

Contents

7	Technical data	34
7.1	Notes regarding the given data	34
7.2	Standards and operating conditions	35
7.2.1	Conformities and approvals	35
7.2.2	Protection of persons and device protection	36
7.2.3	EMC data	36
7.2.4	Environmental conditions	37
7.3	Radial forces and axial forces	38
7.4	Rated data	40
7.4.1	Rated data 50 Hz	40
7.4.2	Rated data 60 Hz	43
7.4.3	Rated data 87 Hz	46
7.5	Ecodesign Directive	49
7.6	Dimensions	54
7.6.1	Basic dimensions	54
7.6.2	Integrated inverters	80
7.6.3	Additional lengths	84
7.7	Weights	86
7.7.1	Basic weights	86
7.7.2	Additional weights	86

8	Product extensions.....	87
8.1	Motor connection.....	87
8.1.1	Connection options.....	87
8.1.2	Assignment of the terminal boxes.....	89
8.1.3	Assignment of the connectors Han.....	97
8.1.4	Connection via terminal box.....	99
8.1.5	Connection via connector.....	102
8.1.6	Connection via Han connector.....	106
8.1.7	Connection via M12 connector.....	108
8.2	Spring-applied brakes.....	109
8.2.1	Information on project planning.....	110
8.2.2	Spring-applied holding brake.....	113
8.2.2.1	Assignment of braking torques.....	113
8.2.2.2	Rated data.....	113
8.2.3	Spring-applied application brake, IP54/IP55 single brake.....	115
8.2.3.1	Assignment of braking torques.....	115
8.2.3.2	Rated data.....	116
8.2.4	Spring-applied application brake, IP65/IP66 single brake.....	127
8.2.4.1	Assignment of braking torques.....	127
8.2.4.2	Rated data.....	128
8.2.5	Spring-applied application brake, IP54/IP55 single brake LongLife.....	134
8.2.5.1	Assignment of braking torques.....	134
8.2.5.2	Rated data.....	135
8.2.6	Spring-applied application brake, IP54/IP55 double brake.....	141
8.2.6.1	Assignment of braking torques.....	141
8.2.6.2	Rated data.....	142
8.2.7	Spring-applied safety brake, IP54/IP55 single brake.....	148
8.2.8	Spring-applied safety brake, IP54/IP55 double brake.....	148
8.3	Feedback.....	149
8.3.1	Resolver.....	150
8.3.2	Incremental encoder.....	151
8.3.3	Absolute value encoder.....	152
8.4	Blower.....	153
8.4.1	Standard version.....	154
8.4.2	Heavy-duty blower.....	156
8.5	Temperature monitoring.....	157
8.5.1	Thermal contacts TCO.....	157
8.5.2	Thermal detectors PT1000.....	158
8.6	Protection cover.....	159
8.7	Second shaft end.....	161
8.8	Handwheel.....	162
9	Product codes.....	163
10	Environmental notes and recycling.....	164
11	Appendix.....	165
11.1	Good to know.....	165
11.1.1	Operating modes of the motor.....	165
11.1.2	Enclosures.....	166



1 About this document

1.1 Document description

This document addresses to all persons who want to carry out any configurations with the products described.

The data and information compiled in this document serve to support you in the dimensioning and selection processes and in carrying out the electrical and mechanical installation. You will receive information regarding product extensions and accessories.

- The document includes safety instructions which must be observed.
- All persons working on and with the drives must have the documentation at hand during work and observe the information and notes relevant for it.
- The documentation must always be complete and in a perfectly readable state.



1.2 Further documents



Information and tools with regard to the Lenze products can be found on the Internet:

www.Lenze.com → Downloads



1.3 Notations and conventions

Conventions are used in this document to distinguish between different types of information.

Numeric notation		
Decimal separator	Point	Generally shown as a decimal point. Example: 1 234.56
Warnings		
UL Warnings	UL	Are used in English and French.
UR warnings	UR	
Text		
Engineering Tools	" "	Software Example: "EASY Starter", "PLC Designer"
Icons		
Page reference		Reference to another page with additional information. Example:  16 = see page 16
Documentation reference		Reference to other documentation with additional information. Example:  EDKxxx = see documentation EDKxxx

Layout of the safety instructions

DANGER!

Indicates an extremely hazardous situation. Failure to comply with this instruction will result in severe irreparable injury and even death.

WARNING!

Indicates an extremely hazardous situation. Failure to comply with this instruction may result in severe irreparable injury and even death.

CAUTION!

Indicates a hazardous situation. Failure to comply with this instruction may result in slight to medium injury.

NOTICE

Indicates a material hazard. Failure to comply with this instruction may result in material damage.



2 Product information

2.1 Product description

Three-phase motors for mains and inverter operation

In a power range from 0.12 to 22 kW, Lenze offers inverter-compatible three-phase motors for more extensive tasks.

These motors differ in terms of efficiency class and can be used for the versions required for controlled or regulated inverter operation.

- Efficiency class IE2 in the power range 0.12 ... 0.55 kW
- Efficiency class IE3 in the power range 0.75 ... 22 kW

Customer benefit

- Different efficiency classes for the greatest economic benefit
- Space saving thanks to compact direct mounting on Lenze gearboxes
- Market-oriented modular system enables universal use for extensive machine tasks
- Standard market connectors ensure fast connection, even when servicing is required



Three-phase AC motor m550-P80/M4



2.2 Identification of the products


Three-phase AC motor product name

Example	m550	-	P	80	supply	S	4
Meaning	Variant	Product name					
Product family		m550					
Efficiency class	IE2		H				
	IE3		P				
Size				63 71 80 90 100 112 132 160 180			
Motor length	Short					S	
	Medium					M	
	Long					L	
Number of pole pairs	4-pole						4



2.3 Features

The following figure provides an overview of the elements and connections on the product.
Their position, size and appearance may vary.

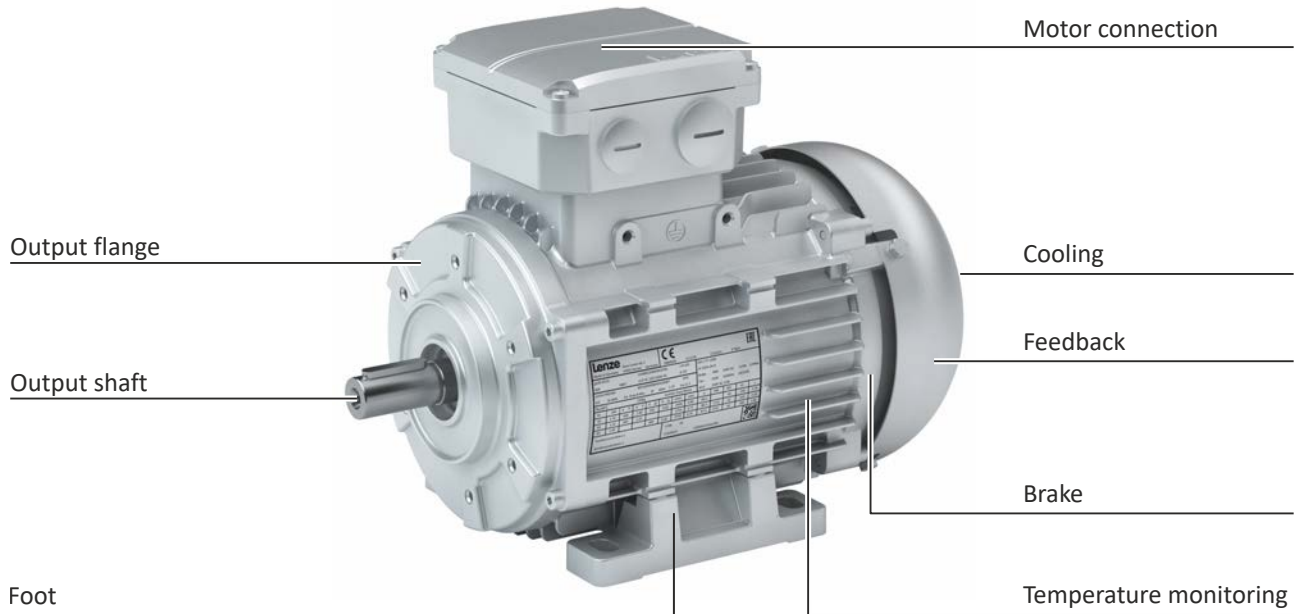



2.4 The modular system



Values printed in bold are standard designs. Values that are not printed in bold are potential extensions, some of them including a surcharge.



Product information

The modular system

Motor		m550-H					m550-P				
		63/S4	63/M4	63/L4	71/M4	71/L4	080/M4	090/M4	090/L4	100/M4	100/L4
Technical data											
Rated power	kW	0.12	0.18	0.25	0.37	0.55	0.75	1.1	1.5	2.2	3.0
Color		Unpainted Grounded/RAL colors									
Surface and corrosion protection		Without Different types of OKS									
Dimensions											
Design		B3/B14/B5									
Solid shaft with featherkey	mm	11 x 23			14 x 30		19 x 40	24 x 50		28 x 60	
Output flange	mm	FT75 FF115			FT85 FF130		FT100 FT130 FF165	FT115 FT130 FF165		FT130 FF215	
Cooling		Integral fan Blower Heavy-Duty fan									
Product extensions											
Connection method		Y/Δ									
Connection type		Terminal box M23 connector Han-Modular connector M12 connector									
Spring-applied brake		Without Holding brake Application brake Application brake with safety function									
Feedback		Without Resolver Incremental encoder Incremental encoder with safety functions Absolute value encoder									
Temperature monitoring		TKO thermal contact PT1000 temperature sensor									
Integral fan		Protection cover 2. Shaft end Handwheel									
Blower		Protection cover									




Motor		m550-P						
		112/M	132/M4	132/L4	160/M4	160/L4	180/M4	180/L4
Technical data								
Rated power	kW	4.0	5.5	7.5	11	15	18.5	22
Color		Unpainted Grounded/RAL colors						
Surface and corrosion protection		Without Different types of OKS						
Dimensions								
Design		B3/B14/B5	B3/B5					
Solid shaft with featherkey	mm	28 x 60	38 x 80		42 x 110		48 x 110	
Output flange	mm	FT130 FF215	FF265		FF300		FF300	
Cooling		Integral fan Blower Heavy-Duty fan						
Product extensions								
Connection method		Y/Δ						
Connection type		Terminal box						
		M23 connector			-			
		Han-Modular connector			-			
		M12 connector						
Spring-applied brake		Without Holding brake Application brake Application brake with safety function						
Feedback		Without Resolver Incremental encoder Incremental encoder with safety functions Absolute value encoder						
Temperature monitoring		TKO thermal contact PT1000 temperature sensor						
Integral fan		Protection cover						
		2. Shaft end Handwheel			- -			
Blower		Protection cover						



2.4.1 Mounting positions

Positions of the terminal boxes/connectors

Blower terminal box
with/without M23 connector

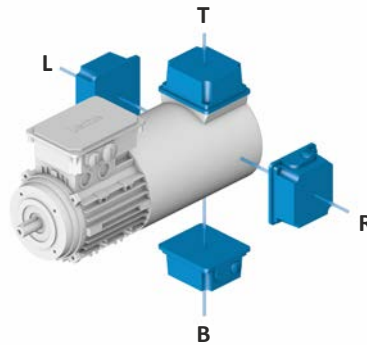

Positions of the connections


Power terminal box

M23 cable glands/connectors



Blower terminal box

M23 cable glands/connectors




Han connector



Positions of the i550/8400 motec frequency inverters

Positions of i550/8400 motec

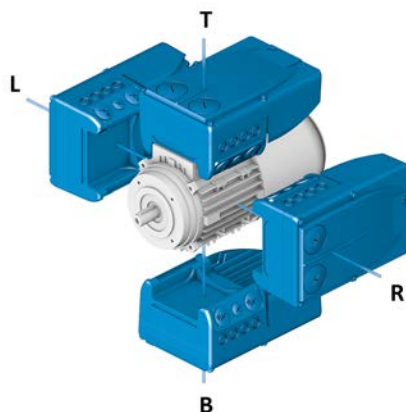

Positions of the connectors

8400 motec I/O connection




Product information

The modular system
Mounting positions



Positions of the i550/i650 motec frequency inverters



Positions of the i550/i650 motec

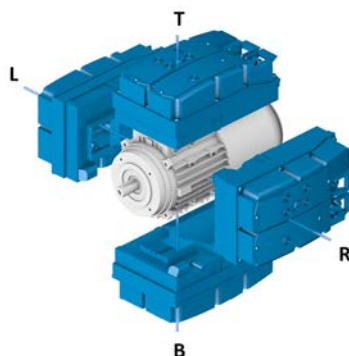

Position of the manual release lever



Only positions T, R, B and L are available for the spring-applied holding brake.

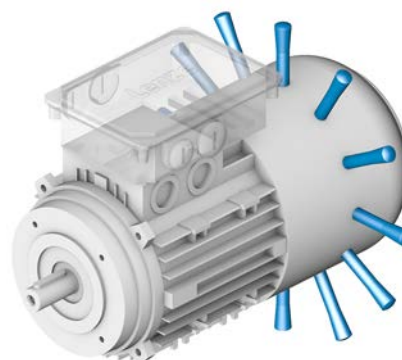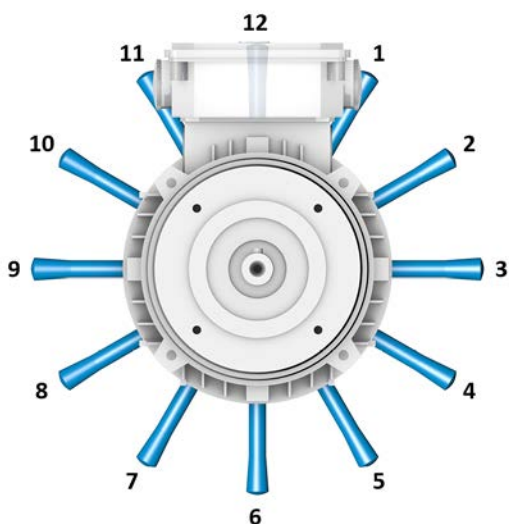



3 Safety instructions

3.1 Basic safety instructions

Disregarding the following basic safety instructions and safety information may lead to severe personal injury and damage to property!

- Only use the product as directed.
- Never commission the product in the event of visible damage.
- Never modify the product technically.
- Never commission the product before assembly has been completed.
- Never operate the product without the required covers.
- Connect/disconnect all pluggable connections only in deenergized condition!
- Only remove the product from the installation in the deenergized state.
- The product can – depending on their degree of protection – have live, movable or rotating parts during or after operation. Surfaces can be hot.
- Observe the specifications of the corresponding documentation. This is the condition for safe and trouble-free operation and the achievement of the specified product features.
- The procedural notes and circuit details given in the associated documentation are suggestions and their transferability to the respective application has to be checked. The manufacturer of the product does not take responsibility for the suitability of the process and circuit proposals.
- All work with and on the product may only be carried out by qualified personnel. IEC 60364 and CENELEC HD 384 define the qualifications of these persons:
 - They are familiar with installing, mounting, commissioning, and operating the product.
 - They have the corresponding qualifications for their work.
 - They know and can apply all regulations for the prevention of accidents, directives, and laws applicable at the place of use.

Please observe the specific safety information in the other sections!



3.2 Application as directed

- The product is a professional equipment intended for use by trades, specific professions or industry and not for sale to the general public. IEC 60050 [IEV 161-05-05]
- To prevent personal injury and damage to property, higher-level safety and protection systems must be used!
- All transport locks must be removed.
- Mounted eye bolts on the motor are not suitable for transporting geared motors.
- The product may only be operated under the specified operating conditions and in the specified mounting positions.
- The product may be operated on the mains or on the inverter.
- Only certified application brakes may be used as safety brakes for functional safety.
- The product must not be operated in private areas, in potentially explosive atmospheres and in areas with harmful gases, oils, acids and radiation.



3.3 Foreseeable misuse

- Use in potentially explosive areas
- Use in aggressive environments
- Use under water
- Use under radiation
- Use in generator mode



3.4 Residual hazards

Even if notes given are taken into consideration and protective measures are implemented, the occurrence of residual risks cannot be fully prevented.

The user must take the residual hazards mentioned into consideration in the risk assessment for his/her machine/system.

If the above is disregarded, this can lead to severe injuries to persons and damage to property!

The user must take the residual hazards mentioned into consideration in the risk assessment for his/her machine/system.

If the above is disregarded, this may result in injuries to persons and material damage!

Product

Observe the warning labels on the product!



Dangerous electrical voltage:

Before working on the product, make sure there is no voltage applied to the power terminals!
After mains disconnection, the power terminals will still carry the hazardous electrical voltage for the time given next to the symbol!



Electrostatic sensitive devices:

Before working on the product, the staff must ensure to be free of electrostatic charge!



High leakage current:

Carry out fixed installation and PE connection in compliance with:
EN 61800-5-1 / EN 60204-1



Hot surface:

Use personal protective equipment or wait until the device has cooled down!

Motor protection

- Installed temperature sensors are no full protection for the machine.
 - If necessary, limit the maximum current. Parameterize the inverter so that it will be switched off after some seconds of operation with $I > I_{rated}$, especially if there is a risk of blocking.
 - Integrated overload protection does not prevent overloading under all conditions.
- The fuses are no motor protection.
 - Use a current-dependent motor protection switch.
 - Use the built-in temperature sensors.
- Too high torques cause a fraction of the motor shaft.
 - Do not exceed the maximum torques according to the technical data on the nameplate.
- Lateral forces on the motor shaft are possible.
 - Align the shafts of motor and driven machine exactly to each other.



Protection of persons

- The power terminals may carry voltage in the switched-off state or when the motor is stopped.
 - Before working, check whether all power terminals are deenergized.
- Voltages may occur on the drive components (e.g. capacitive, caused by inverter supply).
 - Careful earthing in the marked positions of the components must be carried out.
- There is a risk of burns from hot surfaces.
 - Provide protection against accidental contact.
 - Use personal protective equipment or wait until the device has cooled down.
 - Prevent contact with flammable substances.
- There is a risk of injury due to rotating parts.
 - Before working on the drive system, ensure that the motor is at a standstill.
- There is a risk of accidental start-up or electric shock.




4 Information on project planning

4.1 General information

Operation with mains power

If operated with mains power, the three-phase AC motor starts up in accordance with the speed-torque characteristic when switched on. It follows this characteristic until it reaches its stable operating point. The operating point is reached when the load or rated torque (M_N) is smaller than the starting torque (M_A) and pull-up torque (M_S). The rated speed (n_N) of the drive is always less than the arithmetic synchronous speed (n_S).

The difference between rated and synchronous speed relative to the synchronous speed is called the slip.

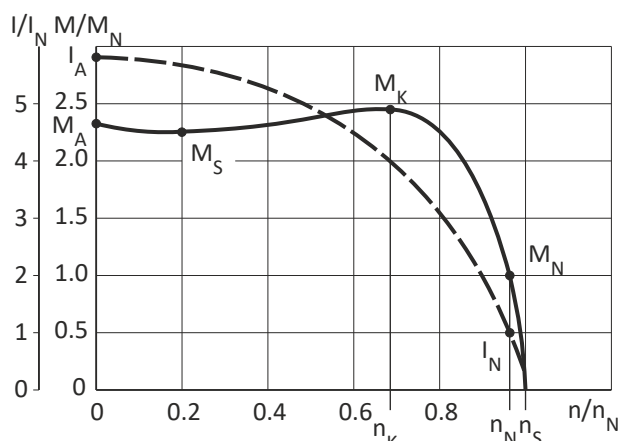


Operation on the frequency inverter

Standard setting

The frequency inverter is set for easy operation on a three-phase AC motor with vector control by default. The rated torque of the motor is available in a setting range up to 50 Hz in this mode of operation.

Extended setting range up to 87 Hz

If the frequency inverter's U/f reference point is set to 87 Hz, the rated torque can be taken into account in an extended setting range. A 230/400 V motor is used here, for example, and operated in delta on a 400 V frequency inverter. The setting range is increased by 40 %. The inverter must be dimensioned for a rated motor current of 230 V.

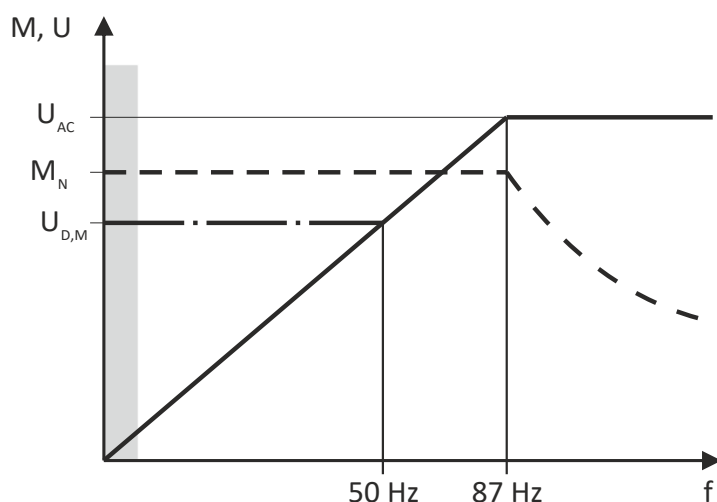




Torque reduction at low motor frequencies

At low motor frequencies (usually < 20 Hz) and with an integral fan, the motor is not cooled sufficiently at the rated torque. The motor can be operated from 5 Hz by reducing the torque accordingly.

Constant cooling takes place over the entire speed range in motors with a blower. This means that they can be used with their rated torque from 5 Hz.

The diagram shows the torque reduction depending on the motor frame size for self-ventilated motors taking into account the thermal behavior during inverter operation.

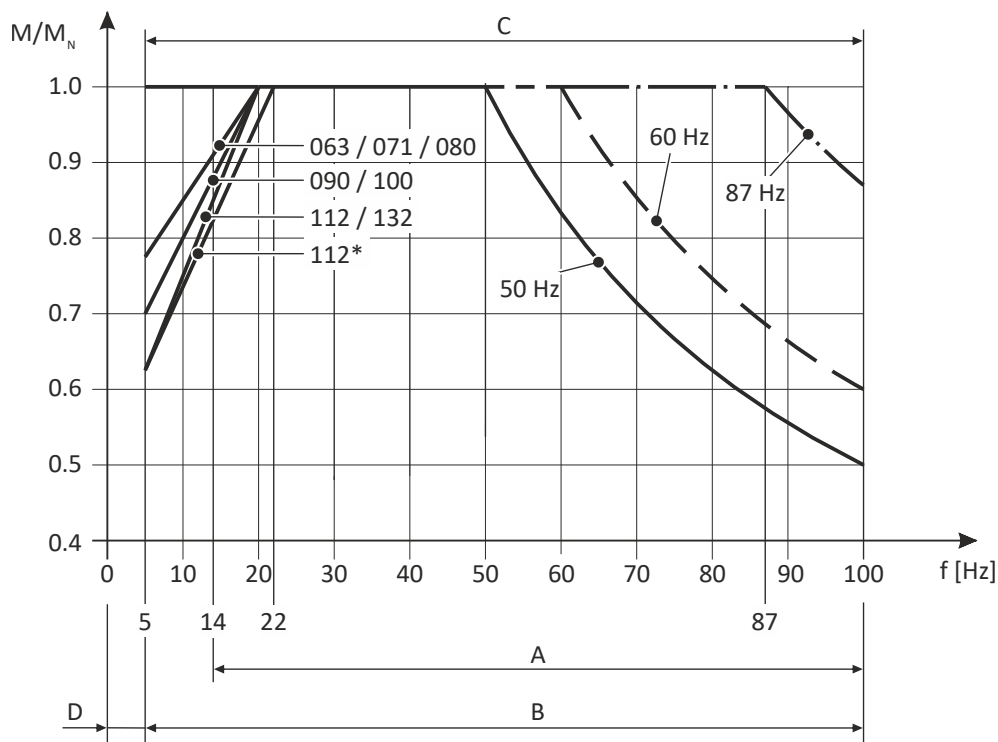

- A Operation with integral fan and brake
- B Operation with integral fan and brake with wide-range voltage DC 180 ... 205 V or AC 400 ... 460 V
- C Operation with blower
- D Operation is possible below 5 Hz depending on the application and control mode.
The application case must be checked by Lenze.
- 112* Motor mounting of i550 motec or i650 motec




4.2 Drive dimensioning

In order to carry out an accurate drive dimensioning process, you can use our configuring software, the »EASY System Designer«.

With the »EASY System Designer«, you can design the drive both quickly and to a high quality. The software contains profound and proven expertise with regard to drive applications and mechatronic drive components.

Please get in touch with your Lenze representative.

Workflow

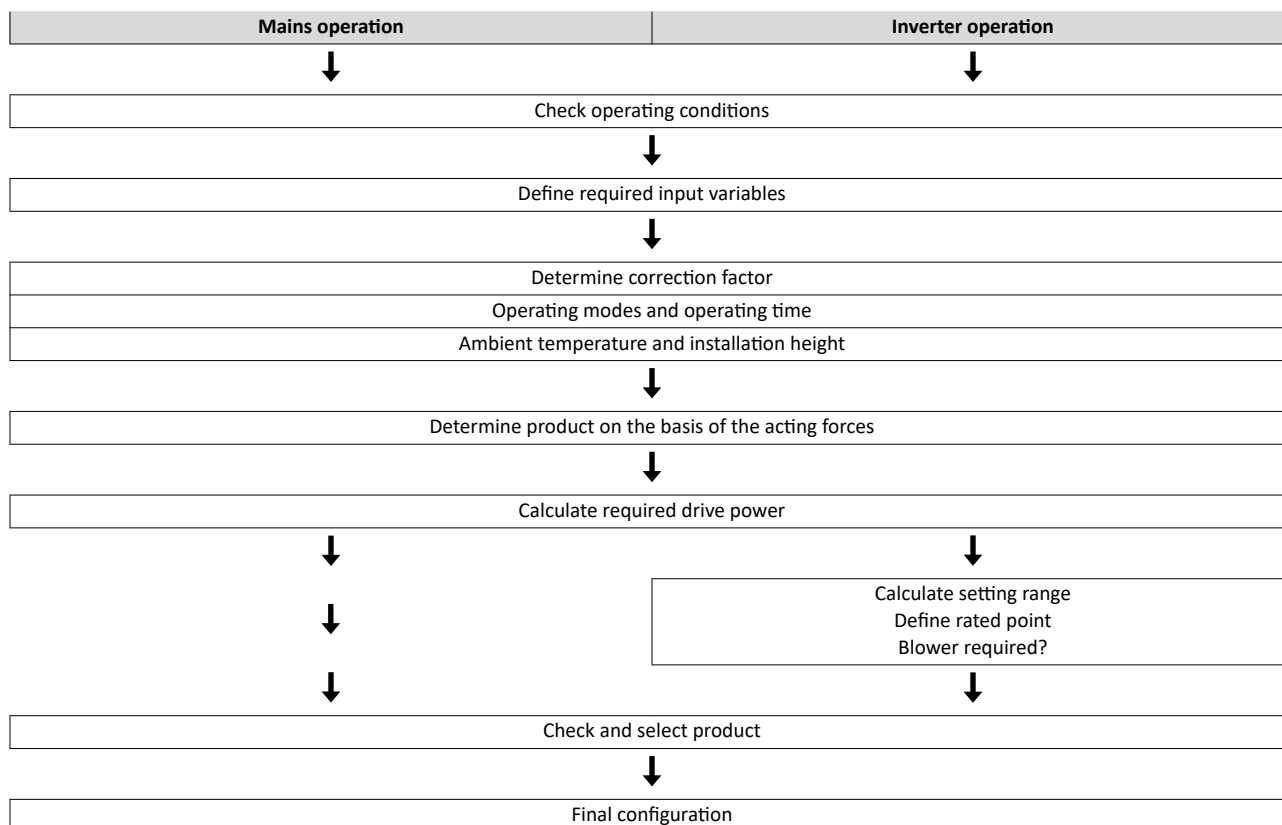

Check operating conditions

Check
Approvals Conformities Supply voltage Degree of protection Ambient temperature Surface protection

► [Standards and operating conditions](#) 35

► [Surface and corrosion protection](#) 27



Define required input variables

Necessary input variables	Note	Symbol	Unit
Ambient temperature		T_V	°C
Site altitude Amsl		H	m
Radial force		F_{rad}	rated
axial force		F_{ax}	rated
Transmission element at the output	Gear wheels, sprockets ...		
Effective diameter of the transmission element		d_w	mm
Load torque		$M_{L,max}$	Nm
Load speed		$n_{L,max}$	rpm
	With inverter operation	$n_{L,min}$	rpm

Determine correction factor

Operating modes S1, S2, S3, S6, and operating time							
Operating mode S1		Operating mode S2		Operating mode S3		Operating mode S6	
ED	k_L	ED	k_L	ED	k_L	ED	k_L
%		min		%		%	
100	1.0	10	1.4 - 1.5	15	1.4 - 1.5	15	1.5 - 1.6
		30	1.15 - 1.2	25	1.3 - 1.4	25	1.4 - 1.5
		60	1.07 - 1.1	40	1.15 - 1.2	40	1.3 - 1.4
		90	1.0 - 1.05	60	1.05 - 1.1	60	1.15 - 1.2

► Operating modes of the motor [165](#)

Installation height amsl			
≤ 1000 m	≤ 2000 m	≤ 3000 m	≤ 4000 m
Correction factor			
k_H	k_H	k_H	k_H
1	0.95	.90	.85

Ambient temperature		
≤ 40 °C	≤ 45 °C	≤ 50 °C
Correction factor		
k_{TU}	k_{TU}	k_{TU}
1	0.95	0.90

Determine product on the basis of the forces

Transmission element			Gear wheels	Sprockets	Toothed belt pulleys (depending on the preloading)	Narrow V-belt (depending on the preloading)
Additional radial force factor	f_z		≥ 17 teeth = 1.0	≥ 20 teeth = 1.0	With belt tightener= 2.0 - 2.5	1.5 - 2.0
			< 17 teeth = 1.15	< 20 teeth = 1.25	Without belt tightener= 2.5 - 3.0	
				< 13 teeth = 1.4		
			Calculation			Check
Radial force	F_{rad}	N	$F_{rad} = 2000 \times \frac{M_{L,max} \times f_z}{dw}$			$F_{rad} \leq F_{rad,max}$
Axial force	F_{ax}	N				$F_{ax} \leq F_{ax,max}$

d_w Effective diameter of transmission element

► Radial forces and axial forces [38](#)



Calculate required drive power

	Calculation	Symbol	Unit
Drive power	$P_1 = \frac{M_{L,max} \times n_{L,max}}{9549 \times k_L \times k_H \times k_{TU}}$	P_1 Input fields	kW

► [Rated data](#) 40

Calculate setting range (inverter operation) and determine rated point

	Calculation
Setting range	$V = \frac{n_{L,max}}{n_{L,min}}$

Cooling	Setting range	Rated point
Integral fan	≤ 2.50 (20 - 50 Hz) ≤ 4.35 (20 - 87 Hz)	50 Hz 87 Hz
Blower	≤ 10.0 (5 - 50 Hz)	50 Hz
Integral fan (reduced torque)	≤ 17.4 (5 - 87 Hz)	87 Hz

Operation on the inverter 22

Inverter operation: Check and select product

Rated data	Check	Unit	Note
Rated frequency	50/87	Hz	Dependent on setting range
Rated power	$P_{rated} \geq P_1$	kW	
Rated torque	$M_{rated} \geq M_{L,max}$	Nm	
Rated speed	$n_{rated} \geq n_{L,max}$	rpm	

► [Rated data](#) 40

Mains operation: Check and select product

Rated data	Screening	Unit	Note
Rated frequency	50/60	Hz	
Rated power	$P_{rated} \geq P_1$	kW	
Rated torque	$M_{rated} \geq M_{L,max}$	Nm	
Rated speed	$n_{rated} = n_{L,max}$	rpm	

► [Rated data](#) 40



4.3 Final configuration

	Screening
Connection dimensions	Output shaft Output flange
Product extensions	Motor connection (connector/terminal box) Brake Feedback Blower Temperature monitoring

More information about the final configuration:

► [The modular system](#) 12

► [Product extensions](#) 87

4.3.1 Surface and corrosion protection

Depending on the ambient conditions, the surface and corrosion protection system (called OKS) offers tailor-made solutions for optimum protection.

Various surface coatings ensure reliable functioning even at high air humidity, in outdoor installations, or in the presence of atmospheric contamination. Any color from the "RAL Classic" collection can be chosen for the top coat.

For indoor installation in buildings and if no special corrosion protection is required, the products are also available unpainted (without surface and corrosion protection system).

Surface and corrosion protection	Applications	Type
without OKS (unpainted)	- Indoor installation, no special corrosion protection necessary - Painting by customer	Standard
OKS-G (primed)	Dependent on subsequent top coat applied	Optional
OKS-S (small)	- Standard applications - Indoor installation in heated buildings - Air humidity up to 90%	
OKS-M (medium)	- Indoor installation in unheated buildings - Covered, protected outdoor installation - Air humidity up to 95%	
OKS-L (large)	- Outdoor installation - Air humidity above 95% - Chemical industrial plants - Food industry	

Surface and corrosion protection	Corrosivity category	Surface coating	Color	Coating thickness
	DIN EN ISO 12944-2	Design		
Without OKS (unpainted)	-	Dip priming of the gray cast iron parts	-	30 ... 50 µm
OKS-G (primed)	-	- Dip priming of the gray cast iron parts 2K PUR priming coat	-	80 ... 120 µm
OKS-S (small)	Comparable to C1	- Dip priming of the gray cast iron parts 2K-PUR top coat	- Standard: RAL 7012 - Optional: According to RAL Classic possible	80 ... 120 µm
OKS-M (medium)	Comparable to C2	Dip priming of the gray cast iron parts		110 ... 160 µm
OKS-L (large)	Comparable to C3	2K PUR priming coat 2K-PUR top coat		140 ... 200 µm



4.3.2 Temperature ranges

Temperature ranges

The following temperature ranges are available matched to your ambient conditions:

- Default
- Deep-freeze
- Wide range



Pay attention to the notes on the temperature ranges!

In case of ambient temperatures $< -30\text{ °C}$ or $> +40\text{ °C}$, please contact your responsible Lenze sales company.

Temperature ranges	
Default	
Ambient temperature	$0\text{ °C} \dots +40\text{ °C}$
Note	At an ambient temperature generally over $+30\text{ °C}$: • A check of the application case by Lenze is required.
Deep-freeze	
Ambient temperature	$-30\text{ °C} \dots +10\text{ °C}$
Note	When starting a cold motor at below -20 °C, you have to expect an increased starting torque on account of the higher viscosity of the roller bearing grease. • Take a starting torque reserve for the motor of around 20 % into account during the configuration. Commissioning at over $+10\text{ °C}$: • Operate the drive with max. 50 % of the rated torque to avoid any shortening of the service life.
Wide range	
Ambient temperature	$-30\text{ °C} \dots +40\text{ °C}$
Note	When starting a cold motor at below -20 °C, you have to expect an increased starting torque on account of the higher viscosity of the roller bearing grease. • Take a starting torque reserve for the motor of around 30 % into account during the configuration. At an ambient temperature generally over $+30\text{ °C}$: • A check of the application case by Lenze is required. At a temperature constantly between -30 °C and -25 °C, the service life is up to 20 % lower than with the deep-freeze package.



5 Mechanical installation

5.1 Important notes

- Install the product according to the information in the chapter "Standards and operating conditions".
 - ▶ [Standards and operating conditions](#)  35
- The technical data and the data regarding the supply conditions can be found on the nameplate and in this documentation.
- Ambient media – especially chemically aggressive ones – may damage shaft sealing rings, lacquers and plastics.
- Lenze offers special surface and corrosion protection in this case.

NOTICE

Bearing damage caused by unbalance!

Shafts with keyway are balanced with a half featherkey!

▶ Balance transmission elements with a half featherkey!



5.2 Transport

Preconditions

- Ensure appropriate handling.
- Make sure that all component parts are securely mounted. Secure or remove loose component parts.
- Only use safely fixed transport aids (e.g., eye bolts or support plates).
- Do not damage any components during transport.
- Avoid electrostatic discharges on electronic components and contacts.
- Avoid impacts.
- Check the carrying capacity of the hoists and load handling devices. The weights can be found in the shipping documents.
- Secure the load against tipping and falling down.
- Standing beneath suspended loads is prohibited.



5.3 Installation

Mounting surfaces

- The mounting surfaces must be plane, torsionally rigid and free from vibrations.
- The mounting areas must be suited to absorb the forces and torques generated during operation.
- Ensure an unhindered ventilation.
- For versions with a fan, keep a minimum distance of 10 % from the outside diameter of the fan cover in intake direction.



6 Electrical installation

6.1 Important notes

DANGER!

Risk of injury and risk of burns from dangerous voltage

Power terminals may also carry voltage in the switched-off state or when the motor is stopped and may cause life-threatening cardiac arrhythmia and serious burns.

- ▶ Disconnect the product from the mains.
- ▶ Check that the power terminals are deenergized before starting work.

-
- When working on energized products, comply with the applicable national accident prevention regulations.
 - The electrical installation must be carried out according to the appropriate regulations (e.g. cable cross-sections, fuses, PE connection).
 - The manufacturer of the system or machine is responsible for adherence to the limits required in connection with EMC legislation.

Connection for high leakage current

If the leakage current is greater than 3.5 mA for alternating current or greater than 10 mA for direct current, the standard EN 61800-5-1 requires that at least one or more of the following measures be met:

- The minimum PE conductor cross-section is 10 mm² with Cu or 16 mm² with Al.
- Attachment of an additional protective grounding conductor with the same cross-section as the original protective grounding conductor.
 - Do not place the additional terminal on the same terminal.
- Provide automatic disconnection of the mains in case of interruption of the protective conductor.

▶ [Connection options](#)  87

Operation on an external inverter

A max. pulse voltage amplitude of $U_{pk} = 1560 \text{ V}$ at the motor terminals must not be exceeded.

Here, the minimum pulse rise time must be $t_r = 0.1 \text{ } \mu\text{s}$.

If it cannot be ruled out that the permissible voltage peaks will be exceeded or that the minimum pulse rise time will not be reached, the following measures must be initiated:

- Reduction of the DC-bus voltage (threshold for brake chopper voltage)
- Use of filters, chokes
- Use of special motor cables



6.2 Preparation



The notes for the electrical connection can be found in
in the terminal box (if motors with a terminal box are used).
the connection plan (if motors with connectors are used).

EMC-compliant wiring



The EMC-compliant wiring is described in detail in the documentation of the Lenze
inverters.



7 Technical data

7.1 Notes regarding the given data

Catalog data

The power values, torques and speeds indicated in the catalog are rounded values and apply to

- Operating time per day = 8 hrs (100 % ED)
- Ambient temperature = -30 ... +40 °C
- Site altitude $\leq$ 1000 m above sea level
- The specified rated data apply to the operating mode S1 (acc. to EN 60034-1).

NOTICE

In case of other operating conditions, the achievable values can differ for those mentioned.

► In case of extreme operating conditions, please get in touch with your Lenze representative.



7.2 Standards and operating conditions

7.2.1 Conformities and approvals

More information and certificates of approval can be found under

[IE2/IE3 m500 three-phase AC motors \(Lenze.com\)](https://www.lenze.com/en/IE2/IE3-m500-three-phase-AC-motors)

Europe					
Country	Conformity/ approval	Law/standard	Description	Special feature	Product representation
European Union	CE	(EU) 2019/1781	Regulation laying down ecodesign requirements for electric motors and speed control	-	CE mark
		2006/42/EC	Machinery Directive	Only for safety-relevant components	
		2011/65/EU	RoHS	-	
		2014/30/EU	EMC Directive		
		2014/35/EU	Low-Voltage Directive		
Great Britain	UKCA	S.I. 2008/1597	The Supply of Machinery (Safety) Regulations 2008	Only for safety-relevant components	UKCA mark
		S.I. 2012/3032	The Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment Regulations 2012	-	
		S.I. 2016/1091	The Electromagnetic Compatibility Regulations 2016		
		S.I. 2016/1101	The Electrical Equipment (Safety) Regulations 2016		
		S.I. 2021/745	The Ecodesign for Energy-Related Products and Energy Information Regulations 2021		

America					
Country	Conformity/ approval	Law/standard	Description	Special feature	Product representation
Brazil	INMETRO	ABNT NBR 17094-1	Rotating electrical machines - Part 1: Induction motors three-phase - Requirements	Approved products	INMETRO mark
		Portaria n.º 1, 2017	MEPS		
Canada	CSA	CSA 22.1 No. 100	CSA Standard for Motors and Generators	-	cULus mark
	NrCAN	SOR/2016-311 (Division 12 - Subdivision A)	Energy Efficiency Regulations		UL Energy mark
USA	DOE	10 CFR Part 431 - Subpart B	Energy Efficiency Program for Certain Commercial and Industrial Equipment		UL Energy mark + CC number
	UL	UL 1004-1	UL Standard for Rotating Electrical Machines		cULus mark

Technical data

Standards and operating conditions
Protection of persons and device protection



Asia					
Country	Conformity/ approval	Law/standard	Description	Special feature	Product representation
China	-	GB 18613	Minimum allowable values of energy efficiency and energy efficiency grades for small and medium three-phase asynchronous motors	-	CEL mark
		GB/T 26572	Requirements on concentration limits for certain restricted substances in electrical and electronic products		EFUP mark
	CCC	GB 12350	Safety requirements of small power motors		CCC mark
Singapore	NEA	Energy Conservation Act 2013	Energy Conservation Act (Cap. 92C) - MEPS	-	-
		IEC 60034-2-1	Rotating electrical machines - Part 2-1: Standard methods for determining losses and efficiency from tests		
South Korea	KEA	KS C IEC 60034-2-1		-	KEL mark incl. KC mark
		MOTIE Notification No. 2017-61MOTIE Notification No. 2020-225	Regulation on energy Efficiency Labeling & Standards - MEPS		

7.2.2 Protection of persons and device protection

Degree of protection			
EN	EN IEC 60529,EN IEC 60034-5	IP54	Information applies to the mounted and ready-for-use state
		IP55	
		IP65	
		IP66	
Permissible voltage			
-	IEC 60034-18-41	IVIC C	At 500 V
Temperature class			
-	EN IEC 60034-1	F (155 °C)	Insulation system
Utilization		B (130 °C)	Utilization

7.2.3 EMC data

Interference immunity		
-	EN IEC 60034-1	A final overall assessment of the drive system is indispensable
Noise emission		
-	EN IEC 60034-1	A final overall assessment of the drive system is indispensable



7.2.4 Environmental conditions

Climate			
Storage	EN 60721-3-1:1997	1K3 (-25 ... +60 °C)	
Transport	EN 60721-3-2:1997	2K3 (-25 ... +70 °C)	
Operation	EN 60721-3-3:1995 + A2:1997	3K3 (0 ... +40 °C)	
	-	-30 ... +10 °C	Depending on the temperature package! Observe ambient temperature on the nameplate!
		-30 ... +40 °C	
Air humidity			
-	-	Average relative humidity 85%	Without condensation
Energy efficiency			
Efficiency level	EN IEC 60034-30-1	Energy efficiency class IE2	according to REGULATION (EU) 2019/1781
		Energy efficiency class IE3	
Installation altitude			
0 ... 1000 m amsl	-	Without current derating	
1000 ... 4000 m amsl		Reduce power by 5 %/1000 m	
Vibration resistance			
Operation	EN 60721-3-3:1995 + A2:1997	3M5	




7.3 Radial forces and axial forces



The values for the bearing service life L_{10h} refer to an average speed of 2000 rpm for the motor. Depending on the ambient temperatures, they are additionally limited by the grease lifetime.

Data for axial forces refer to the maximum radial force with the corresponding bearing service life.

Application of forces

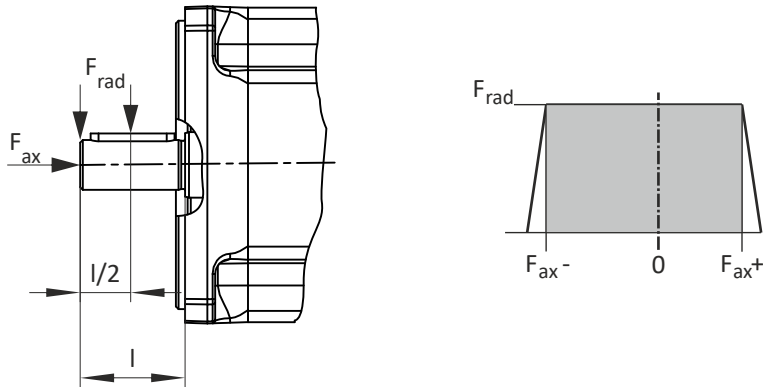

Application of force at $l/2$

Motor			m550-H	
Size			063	071
Bearing service life 10000 h				
Radial force	F_{rad}	rated	400	700
Min. axial force	$F_{ax,-}$	rated	-200	-400
Max. axial force	$F_{ax,+}$	rated	400	600
Bearing service life 20000 h				
Radial force	F_{rad}	rated	280	590
Min. axial force	$F_{ax,-}$	rated	-140	-270
Max. axial force	$F_{ax,+}$	rated	340	470
Bearing service life 30000 h				
Radial force	F_{rad}	rated	230	500
Min. axial force	$F_{ax,-}$	rated	-110	-230
Max. axial force	$F_{ax,+}$	rated	310	430



Motor			m550-P						
Size			080	090	100	112	132	160	180
Bearing service life 10000 h									
Radial force	F_{rad}	rated	880	1150	1500	2100	2600	4100	5100
Min. axial force	$F_{ax,-}$	rated	-510	-620	-700	-850	-930	-1130	-1360
Max. axial force	$F_{Fax,+}$	rated	680	1070	1200	1350	1550	1870	2140
Bearing service life 20000 h									
Radial force	F_{rad}	rated	770	850	1170	1700	2000	3300	4000
Min. axial force	$F_{ax,-}$	rated	-320	-470	-500	-550	-660	-760	-1010
Max. axial force	$F_{Fax,+}$	rated	490	930	1000	1050	1290	1500	1790
Bearing service life 30000 h									
Radial force	F_{rad}	rated	640	730	1050	1430	1700	3100	3600
Min. axial force	$F_{ax,-}$	rated	-260	-370	-390	-400	-530	-610	-760
Max. axial force	$F_{Fax,+}$	rated	430	830	890	900	1160	1350	1540

Application of force at I

Motor			m550-H	
Size			063	071
Bearing service life 10000 h				
Radial force	F_{rad}	rated	370	650
Min. axial force	$F_{ax,-}$	rated	-200	-400
Max. axial force	$F_{Fax,+}$	rated	400	600
Bearing service life 20000 h				
Radial force	F_{rad}	rated	260	550
Min. axial force	$F_{ax,-}$	rated	-140	-270
Max. axial force	$F_{Fax,+}$	rated	340	470
Bearing service life 30000 h				
Radial force	F_{rad}	rated	210	460
Min. axial force	$F_{ax,-}$	rated	-110	-230
Max. axial force	$F_{Fax,+}$	rated	310	430

Motor			m550-P						
Size			080	090	100	112	132	160	180
Bearing service life 10000 h									
Radial force	F_{rad}	rated	800	1050	1350	1900	2350	3700	4700
Min. axial force	$F_{ax,-}$	rated	-510	-620	-700	-850	-930	-1130	-1360
Max. axial force	$F_{Fax,+}$	rated	680	1070	1200	1350	1560	1870	2140
Bearing service life 20000 h									
Radial force	F_{rad}	rated	700	770	1050	1500	1800	3000	3600
Min. axial force	$F_{ax,-}$	rated	-320	-470	-500	-550	-660	-760	-1010
Max. axial force	$F_{Fax,+}$	rated	490	930	1000	1050	1290	1500	1790
Bearing service life 30000 h									
Radial force	F_{rad}	rated	580	670	950	1300	1500	2800	3200
Min. axial force	$F_{ax,-}$	rated	-260	-370	-390	-400	-530	-610	-760
Max. axial force	$F_{Fax,+}$	rated	430	830	890	900	1160	1350	1540

Technical data

Rated data

Rated data 50 Hz



7.4 Rated data

7.4.1 Rated data 50 Hz

Motor			m550-H				
			63/S4	63/M4	63/L4	71/M4	71/L4
Rated power	P_{rated}	kW	0.12	0.18	0.25	0.37	0.55
Rated speed	n_{rated}	rpm	1415	1400	1390	1425	1430
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	3.20	4.90	6.90	9.90	14.7
Rated voltage							
Delta	$V_{N, \Delta}$	V	230	230	230	230	230
Star	$V_{N, Y}$	V	400	400	400	400	400
Rated current							
230 V	$I_{N, \Delta}$	A	0.710	1.07	1.18	1.71	2.34
400 V	$I_{N, Y}$	A	0.410	0.620	0.680	0.990	1.35
Starting current	I_a	A	1.40	1.94	2.60	4.23	6.32
Rated torque	M_{rated}	Nm	0.810	1.23	1.72	2.48	3.67
Starting torque	M_a	Nm	1.54	2.46	3.44	4.45	6.95
Stalling torque	M_b	Nm	1.94	2.83	3.78	6.92	11.3
Power factor	$\cos \phi$		0.67	0.65	0.72	0.70	0.71
Efficiency							
at 50% P_{rated}	η		0.549	0.625	0.695	0.695	0.758
at 75% P_{rated}	η		0.591	0.647	0.685	0.727	0.771
at 100% P_{rated}	η		0.591	0.647	0.685	0.727	0.771
Moment of inertia	J	kgcm ²	2.4	2.9	3.7	9.1	13.3
Weight	m	kg	4.4	4.8	5.8	7.8	9



Technical data

Rated data
Rated data 50 Hz

Motor			m550-P				
			80/M4	90/M4	90/L4	100/M4	100/L4
Rated power	P_{rated}	kW	0.75	1.1	1.5	2.2	3
Rated speed	n_{rated}	rpm	1455	1465	1465	1470	1470
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	19.7	28.7	39.1	57.2	78.0
Rated voltage							
Delta	$V_{N, \Delta}$	V	230	230	230	230	230
Star	$V_{N, Y}$	V	400	400	400	400	400
Rated current							
230 V	$I_{N, \Delta}$	A	2.77	4.00	5.51	7.72	10.6
400 V	$I_{N, Y}$	A	1.60	2.31	3.18	4.46	6.10
Starting current	I_a	A	8.91	16.4	22.5	35.8	47.1
Rated torque	M_{rated}	Nm	4.92	7.17	9.78	14.3	19.5
Starting torque	M_a	Nm	7.38	14.4	20.6	31.3	43.1
Stalling torque	M_b	Nm	16.2	25.2	34.3	49.8	66.6
Power factor	$\cos \phi$		0.77	0.79	0.78	0.77	0.79
Efficiency							
at 50% P_{rated}	η		0.826	0.844	0.851	0.879	0.883
at 75% P_{rated}	η		0.825	0.841	0.853	0.867	0.877
at 100% P_{rated}	η		0.825	0.841	0.853	0.867	0.877
Moment of inertia	J	kgcm ²	27.2	53.8	58.3	123	130.3
Weight	m	kg	12.3	17.4	18.5	31	32

Motor			m550-P				
			112/M4	132/M4	132/L4	160/M4	160/L4
Rated power	P_{rated}	kW	4	5.5	7.5	11	15
Rated speed	n_{rated}	rpm	1470	1480	1480	1485	1485
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	104	142	194	283	386
Rated voltage							
Delta	$V_{N, \Delta}$	V	230	230	230	230	230
Star	$V_{N, Y}$	V	400	400	400	400	400
Rated current							
230 V	$I_{N, \Delta}$	A	13.5	18.3	25.4	36.0	49.2
400 V	$I_{N, Y}$	A	7.82	10.6	14.6	20.8	28.4
Starting current	I_a	A	58.3	84.9	117	163	228
Rated torque	M_{rated}	Nm	26.0	35.5	48.4	70.7	96.5
Starting torque	M_a	Nm	44.1	53.3	77.6	98.9	144
Stalling torque	M_b	Nm	83.1	131	179	226	308
Power factor	$\cos \phi$		0.82	0.82	0.82	0.82	0.84
Efficiency							
at 50% P_{rated}	η		0.898	0.903	0.908	0.920	0.928
at 75% P_{rated}	η		0.886	0.896	0.904	0.914	0.921
at 100% P_{rated}	η		0.886	0.896	0.904	0.914	0.921
Moment of inertia	J	kgcm ²	198	470.6	485.9	1360	1550
Weight	m	kg	41	62	65	169	184

Technical data

Rated data

Rated data 50 Hz



Motor			m550-P	
			180/M4	180/L4
Rated power	P_{rated}	kW	18.5	22
Rated speed	n_{rated}	rpm	1485	1480
Max. speed	n_{max}	rpm	4500	4500
Max. torque	M_{max}	Nm	476	568
Rated voltage				
Delta	$V_{N, \Delta}$	V	230	230
Star	$V_{N, Y}$	V	400	400
Rated current				
230 V	$I_{N, \Delta}$	A	57.6	67.2
400 V	$I_{N, Y}$	A	33.3	38.8
Starting current	I_a	A	315	312
Rated torque	M_{rated}	Nm	119	142
Starting torque	M_a	Nm	251	241
Stalling torque	M_b	Nm	465	467
Power factor	$\cos \phi$		0.88	0.88
Efficiency				
at 50% P_{rated}	η		0.932	0.937
at 75% P_{rated}	η		0.926	0.930
at 100% P_{rated}	η		0.926	0.930
Moment of inertia	J	kgcm ²	2330	2400
Weight	m	kg	250	260



7.4.2 Rated data 60 Hz

Motor			m550-H				
			63/S4	63/M4	63/L4	71/M4	71/L4
Rated power	P_{rated}	kW	0.12	0.18	0.25	0.37	0.55
Rated speed	n_{rated}	rpm	1725	1715	1710	1735	1740
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	3.20	4.90	6.90	9.90	14.7
Rated voltage							
Star	$V_{N, Y}$	V	460	460	460	460	460
Rated current							
460 V	$I_{N, Y}$	A	0.370	0.560	0.600	0.880	1.21
Starting current	I_a	A	1.47	2.07	2.68	4.28	6.32
Rated torque	M_{rated}	Nm	0.700	1.00	1.40	2.00	3.00
Starting torque	M_a	Nm	1.54	2.32	3.08	3.88	5.74
Stalling torque	M_b	Nm	2.01	2.83	3.78	6.94	10.9
Power factor	$\cos \phi$		0.60	0.58	0.66	0.65	0.67
Efficiency							
at 50% P_{rated}	η		0.564	0.640	0.704	0.708	0.762
at 75% P_{rated}	η		0.637	0.680	0.700	0.720	0.755
at 100% P_{rated}	η		0.640	0.680	0.700	0.720	0.755
Moment of inertia	J	kgcm ²	2.4	2.9	3.7	9.1	13.3
Weight	m	kg	4.4	4.8	5.8	7.8	9

Technical data

Rated data

Rated data 60 Hz



Motor			m550-P				
			80/M4	90/M4	90/L4	100/M4	100/L4
Rated power	P_{rated}	kW	0.75	1.1	1.5	2.2	3
Rated speed	n_{rated}	rpm	1760	1770	1770	1775	1770
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	19.7	28.7	39.1	57.2	78.0
Rated voltage							
Star	$V_{N, Y}$	V	460	460	460	460	460
Rated current							
460 V	$I_{N, Y}$	A	1.40	2.02	2.78	3.93	5.31
Starting current	I_a	A	8.71	16.2	22.0	35.6	46.1
Rated torque	M_{rated}	Nm	4.10	5.90	8.10	11.8	16.2
Starting torque	M_a	Nm	6.09	12.5	17.8	27.3	37.1
Stalling torque	M_b	Nm	15.8	23.8	32.4	46.2	62.9
Power factor	$\cos \phi$		0.74	0.77	0.76	0.75	0.77
Efficiency							
at 50% P_{rated}	η		0.831	0.846	0.855	0.880	0.885
at 75% P_{rated}	η		0.852	0.865	0.865	0.895	0.895
at 100% P_{rated}	η		0.855	0.865	0.865	0.895	0.895
Moment of inertia	J	kgcm ²	27.2	53.8	58.3	123	130.3
Weight	m	kg	12.3	17.4	18.5	31	32

Motor			m550-P				
			112/M4	132/M4	132/L4	160/M4	160/L4
Rated power	P_{rated}	kW	4	5.5	7.5	11	15
Rated speed	n_{rated}	rpm	1775	1780	1780	1785	1785
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	104	142	194	283	386
Rated voltage							
Star	$V_{N, Y}$	V	460	460	460	460	460
Rated current							
460 V	$I_{N, Y}$	A	6.82	9.26	12.8	18.2	24.7
Starting current	I_a	A	57.2	81.3	112	156	216
Rated torque	M_{rated}	Nm	21.5	29.5	40.2	58.8	80.2
Starting torque	M_a	Nm	38.7	44.2	64.5	82.1	120
Stalling torque	M_b	Nm	79.6	121	169	205	281
Power factor	$\cos \phi$		0.81	0.81	0.81	0.81	0.83
Efficiency							
at 50% P_{rated}	η		0.901	0.902	0.909	0.919	0.926
at 75% P_{rated}	η		0.895	0.914	0.917	0.924	0.930
at 100% P_{rated}	η		0.895	0.917	0.917	0.924	0.930
Moment of inertia	J	kgcm ²	198	470.6	485.9	1360	1550
Weight	m	kg	41	62	65	169	184



Technical data

Rated data
Rated data 60 Hz

Motor			m550-P	
			180/M4	180/L4
Rated power	P_{rated}	kW	18.5	22
Rated speed	n_{rated}	rpm	1785	1780
Max. speed	n_{max}	rpm	4500	4500
Max. torque	M_{max}	Nm	476	568
Rated voltage				
Star	$V_{N, Y}$	V	460	460
Rated current				
460 V	$I_{N, Y}$	A	29.0	33.8
Starting current	I_a	A	305	304
Rated torque	M_{rated}	Nm	99.0	118
Starting torque	M_a	Nm	208	212
Stalling torque	M_b	Nm	425	423
Power factor	$\cos \phi$		0.87	0.88
Efficiency				
at 50% P_{rated}	η		0.929	0.936
at 75% P_{rated}	η		0.936	0.936
at 100% P_{rated}	η		0.936	0.936
Moment of inertia	J	kgcm ²	2330	2400
Weight	m	kg	250	260

Technical data

Rated data

Rated data 87 Hz



7.4.3 Rated data 87 Hz

Motor			m550-H				
			63/S4	63/M4	63/L4	71/M4	71/L4
Rated power	P_{rated}	kW	0.21	0.33	0.45	0.66	1
Rated speed	n_{rated}	rpm	2525	2505	2500	2535	2540
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	3.20	4.90	6.90	9.90	14.7
Rated voltage							
Delta	$V_{N, \Delta}$	V	400	400	400	400	400
Rated current							
400 V	$I_{N, \Delta}$	A	0.740	1.11	1.19	1.75	2.42
Rated torque	M_{rated}	Nm	0.794	1.26	1.72	2.49	3.76
Power factor	$\cos \phi$		0.6	0.6	0.72	0.7	0.74
Efficiency							
at 50% P_{rated}	η		0.598	0.675	0.729	0.730	0.781
at 75% P_{rated}	η		0.670	0.726	0.768	0.777	0.816
at 100% P_{rated}	η		0.702	0.744	0.776	0.792	0.826
Moment of inertia	J	kgcm ²	2.4	2.9	3.7	9.1	13.3
Weight	m	kg	4.4	4.8	5.8	7.8	9



Technical data

Rated data
Rated data 87 Hz

Motor			m550-P				
			80/M4	90/M4	90/L4	100/M4	100/L4
Rated power	P_{rated}	kW	1.35	1.9	2.6	3.9	5.2
Rated speed	n_{rated}	rpm	2565	2575	2575	2580	2580
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	19.7	28.7	39.1	57.2	78.0
Rated voltage							
Delta	$V_{N, \Delta}$	V	400	400	400	400	400
Rated current							
400 V	$I_{N, \Delta}$	A	2.82	3.94	5.48	7.83	10.4
Rated torque	M_{rated}	Nm	5.03	7.05	9.64	14.4	19.2
Power factor	$\cos \phi$		0.83	0.82	0.8	0.83	0.82
Efficiency							
at 50% P_{rated}	η		0.845	0.855	0.864	0.889	0.893
at 75% P_{rated}	η		0.865	0.878	0.883	0.904	0.906
at 100% P_{rated}	η		0.868	0.882	0.886	0.906	0.907
Moment of inertia	J	kgcm ²	27.2	53.8	58.3	123	130.3
Weight	m	kg	12.3	17.4	18.5	31	32

Motor			m550-P				
			112/M4	132/M4	132/L4	160/M4	160/L4
Rated power	P_{rated}	kW	7.35	9.6	13.1	19.2	26.3
Rated speed	n_{rated}	rpm	2580	2590	2590	2595	2595
Max. speed	n_{max}	rpm	4500	4500	4500	4500	4500
Max. torque	M_{max}	Nm	104	142	194	283	386
Rated voltage							
Delta	$V_{N, \Delta}$	V	400	400	400	400	400
Rated current							
400 V	$I_{N, \Delta}$	A	14.1	18.4	25.4	36.1	49.2
Rated torque	M_{rated}	Nm	27.2	35.4	48.3	70.7	96.8
Power factor	$\cos \phi$		0.86	0.85	0.84	0.85	0.847
Efficiency							
at 50% P_{rated}	η		0.909	0.908	0.914	0.922	0.929
at 75% P_{rated}	η		0.917	0.920	0.925	0.934	0.939
at 100% P_{rated}	η		0.913	0.922	0.925	0.935	0.940
Moment of inertia	J	kgcm ²	198	470.6	485.9	1360	1550
Weight	m	kg	41	62	65	169	184

Technical data

Rated data

Rated data 87 Hz



Motor			m550-P	
			180/M4	180/L4
Rated power	P_{rated}	kW	32.2	38.5
Rated speed	n_{rated}	rpm	2590	2590
Max. speed	n_{max}	rpm	4500	4500
Max. torque	M_{max}	Nm	476	568
Rated voltage				
Delta	$V_{N, \Delta}$	V	400	400
Rated current				
400 V	$I_{N, \Delta}$	A	57.5	67.6
Rated torque	M_{rated}	Nm	119	142
Power factor	$\cos \phi$		0.892	0.906
Efficiency				
at 50% P_{rated}	η		0.932	0.939
at 75% P_{rated}	η		0.941	0.945
at 100% P_{rated}	η		0.942	0.944
Moment of inertia	J	kgcm ²	2330	2400
Weight	m	kg	250	260



7.5 Ecodesign Directive

Product information acc. to REGULATION (EU) 2019/1781 (ANNEX I, Section 2)

Legend

Efficiency (η_{rated} , η) The efficiency refers to the rated voltage and an ambient reference temperature of 25 °C.

Operating points (n ; M) n = Speed as a percentage of the rated speed n_{rated} ; M = Torque as a percentage of the rated torque M_{rated}

Power losses P_V (n ; M) Power losses as a percentage of the rated output power P_{rated} for the operating points (n ; M).

Rated efficiency at full load	η_{rated}	%	59.1	64	64.7	68	68.5	70	72.7	72
Efficiency at 75 % rated load	η	%	59.1	63.7	64.7	68	68.5	70	72.7	72
Efficiency at 50 % rated load	η	%	54.9	56.4	62.5	64	69.5	70.4	69.5	70.8
Efficiency level			IE2							
Manufacturer's name			Lenze SE · Hans-Lenze-Str. 1 · 31855 Aerzen · GERMANY							
Commercial register number			Hannover HRB 204803							
Product's model identifier			M55BH063S04		M55BH063M04		M55BH063L04		M55BH071M04	
Number of poles of the motor			4							
Rated output power	P_{rated}	kW	0.12		0.18		0.25		0.37	
Rated input frequency	f_{rated}	Hz	50	60	50	60	50	60	50	60
Rated voltage	V_{rated}	V	400	460	400	460	400	460	400	460
Rated speed	n_{rated}	rpm	1415	1725	1400	1715	1390	1710	1425	1735
Number of motor phases			Three-phase motor							
Altitudes above sea level		m	0 ... 1000							
Ambient air temperature		°C	-30 ... +40							
Maximum operating temperature		°C	155							
Potentially explosive atmospheres			Operation in explosive atmospheres not permitted							
Power losses										
25; 25	P_V (n; M)	%	31.7	32.5	27.8	28.8	16.8	16.8	14.9	14.8
25; 100	P_V (n; M)	%	45	38.5	41.1	34.8	36.8	28.3	27	21.6
50; 25	P_V (n; M)	%	34.2	36.2	31.1	33.4	17.6	18.4	14.9	15.6
50; 50	P_V (n; M)	%	34.2	35.3	31.1	32.4	20	19.5	15.9	15.8
50; 100	P_V (n; M)	%	46.7	41.8	42.8	38.2	35.6	28.6	27.6	22.6
90; 50	P_V (n; M)	%	41.7	46.5	38.3	42.7	24	26.4	20	23.1
90; 100	P_V (n; M)	%	54.2	53.4	49.4	48.6	38.8	35.6	31.1	29



Rated efficiency at full load	η_{rated}	%	77.1	75.5	82.5	85.5	84.1	86.5	85.3	86.5
Efficiency at 75 % rated load	η	%	77.1	75.5	82.5	85.2	84.1	86.5	85.3	86.5
Efficiency at 50 % rated load	η	%	75.8	76.2	82.6	83.1	84.4	84.6	85.1	85.5
Efficiency level			IE2		IE3					
Manufacturer's name			Lenze SE · Hans-Lenze-Str. 1 · 31855 Aerzen · GERMANY							
Commercial register number			Hannover HRB 204803							
Product's model identifier			M55BH071L04		M55BP080M04		M55BP090M04		M55BP090L04	
Number of poles of the motor			4							
Rated output power	P_{rated}	kW	0.55		0.75		1.1		1.5	
Rated input frequency	f_{rated}	Hz	50	60	50	60	50	60	50	60
Rated voltage	V_{rated}	V	400	460	400	460	400	460	400	460
Rated speed	n_{rated}	rpm	1430	1740	1455	1760	1465	1770	1465	1770
Number of motor phases			Three-phase motor							
Altitudes above sea level		m	0 ... 1000							
Ambient air temperature		°C	-30 ... +40							
Maximum operating temperature		°C	155							
Potentially explosive atmospheres			Operation in explosive atmospheres not permitted							
Power losses										
25; 25	$P_V(n; M)$	%	9.1	9.1	5.9	5.7	4.5	4.4	4.9	4.9
25; 100	$P_V(n; M)$	%	20	15.9	17.3	13.1	13.1	10	13.8	10.6
50; 25	$P_V(n; M)$	%	10	10.6	6.3	6.5	5.1	5.4	5.4	5.7
50; 50	$P_V(n; M)$	%	11.6	11.5	8.1	7.7	6.5	6.3	6.8	6.5
50; 100	$P_V(n; M)$	%	21.1	17.5	17.2	13.5	13.5	10.8	14.1	11.3
90; 50	$P_V(n; M)$	%	15.1	16.9	10.3	11.2	8.7	9.7	9	10
90; 100	$P_V(n; M)$	%	24.4	22.5	18.9	16.8	15.6	14.3	16.3	14.8



Rated efficiency at full load	η_{rated}	%	86.7	89.5	87.7	89.5	88.6	89.5	89.6	91.7
Efficiency at 75 % rated load	η	%	86.7	89.5	87.7	89.5	88.6	89.5	89.6	91.4
Efficiency at 50 % rated load	η	%	87.9	88	88.3	88.5	89.8	90.1	90.3	90.2
Efficiency level			IE3							
Manufacturer's name			Lenze SE · Hans-Lenze-Str. 1 · 31855 Aerzen · GERMANY							
Commercial register number			Hannover HRB 204803							
Product's model identifier			M55BP100M04		M55BP100L04		M55BP112M04		M55BP132M04	
Number of poles of the motor			4							
Rated output power	P_{rated}	kW	2.2		3		4		5.5	
Rated input frequency	f_{rated}	Hz	50	60	50	60	50	60	50	60
Rated voltage	V_{rated}	V	400	460	400	460	400	460	400	460
Rated speed	n_{rated}	rpm	1470	1775	1470	1770	1470	1775	1480	1780
Number of motor phases			Three-phase motor							
Altitudes above sea level		m	0 ... 1000							
Ambient air temperature		°C	-30 ... +40							
Maximum operating temperature		°C	155							
Potentially explosive atmospheres			Operation in explosive atmospheres not permitted							
Power losses										
25; 25	$P_V(n; M)$	%	3.1	3.1	3.4	3.3	2.7	2.7	1.6	1.7
25; 100	$P_V(n; M)$	%	9.2	7.2	10.7	8.2	11	8	6.2	4.8
50; 25	$P_V(n; M)$	%	3.8	4.1	4	4.2	3.2	3.4	2.2	2.4
50; 50	$P_V(n; M)$	%	4.9	4.8	5.3	5.1	4.5	4.2	3.1	3
50; 100	$P_V(n; M)$	%	10	8.2	11.2	9	10.9	8.4	6.8	5.6
90; 50	$P_V(n; M)$	%	6.9	7.7	7.1	7.7	6	6.4	4.4	4.8
90; 100	$P_V(n; M)$	%	12	11.1	13	11.8	12.3	10.8	8.2	7.4



Rated efficiency at full load	η_{rated}	%	90.4	91.7	91.4	92.4	92.1	93	92.6	93.6
Efficiency at 75 % rated load	η	%	90.4	91.7	91.4	92.4	92.1	93	92.6	93.6
Efficiency at 50 % rated load	η	%	90.8	90.9	92	91.9	92.8	92.6	93.2	92.9
Efficiency level			IE3							
Manufacturer's name			Lenze SE · Hans-Lenze-Str. 1 · 31855 Aerzen · GERMANY							
Commercial register number			Hannover HRB 204803							
Product's model identifier			M55BP132L04		M55BP160M04		M55BP160L04		M55BP180M04	
Number of poles of the motor			4							
Rated output power	P_{rated}	kW	7.5		11		15		18.5	
Rated input frequency	f_{rated}	Hz	50	60	50	60	50	60	50	60
Rated voltage	V_{rated}	V	400	460	400	460	400	460	400	460
Rated speed	n_{rated}	rpm	1480	1780	1485	1785	1485	1785	1485	1785
Number of motor phases			Three-phase motor							
Altitudes above sea level		m	0 ... 1000							
Ambient air temperature		°C	-30 ... +40							
Maximum operating temperature		°C	155							
Potentially explosive atmospheres			Operation in explosive atmospheres not permitted							
Power losses										
25; 25	$P_V(n; M)$	%	1.8	1.8	1.1	1.1	0.9	0.9	0.9	0.9
25; 100	$P_V(n; M)$	%	7	5.2	4.2	3.2	4.4	3.2	4.3	3.2
50; 25	$P_V(n; M)$	%	2.3	2.5	1.6	1.8	1.3	1.5	1.4	1.6
50; 50	$P_V(n; M)$	%	3.2	3	2.2	2.2	1.9	1.9	2	2
50; 100	$P_V(n; M)$	%	7.3	5.8	4.5	3.8	4.8	3.8	4.7	3.9
90; 50	$P_V(n; M)$	%	4.4	4.6	3.4	3.8	2.9	3.2	3.2	3.6
90; 100	$P_V(n; M)$	%	8.8	7.9	6.2	6.1	6.1	5.5	6.2	5.8



Rated efficiency at full load	η_{rated}	%	93	93.6
Efficiency at 75 % rated load	η	%	93	93.6
Efficiency at 50 % rated load	η	%	93.7	93.6
Efficiency level			IE3	
Manufacturer's name			Lenze SE · Hans-Lenze-Str. 1 · 31855 Aerzen · GERMANY	
Commercial register number			Hannover HRB 204803	
Product's model identifier			M55BP180L04	
Number of poles of the motor			4	
Rated output power	P_{rated}	kW	22	
Rated input frequency	f_{rated}	Hz	50	60
Rated voltage	V_{rated}	V	400	460
Rated speed	n_{rated}	rpm	1480	1780
Number of motor phases			Three-phase motor	
Altitudes above sea level		m	0 ... 1000	
Ambient air temperature		°C	-30 ... +40	
Maximum operating temperature		°C	155	
Potentially explosive atmospheres			Operation in explosive atmospheres not permitted	
Power losses				
25; 25	$P_V(n; M)$	%	0.8	0.9
25; 100	$P_V(n; M)$	%	4.4	3.2
50; 25	$P_V(n; M)$	%	1.3	1.5
50; 50	$P_V(n; M)$	%	1.9	1.9
50; 100	$P_V(n; M)$	%	4.8	3.8
90; 50	$P_V(n; M)$	%	3	3.3
90; 100	$P_V(n; M)$	%	6	5.5




7.6 Dimensions

7.6.1 Basic dimensions

m550-H63

Self-ventilated motors

Design B3

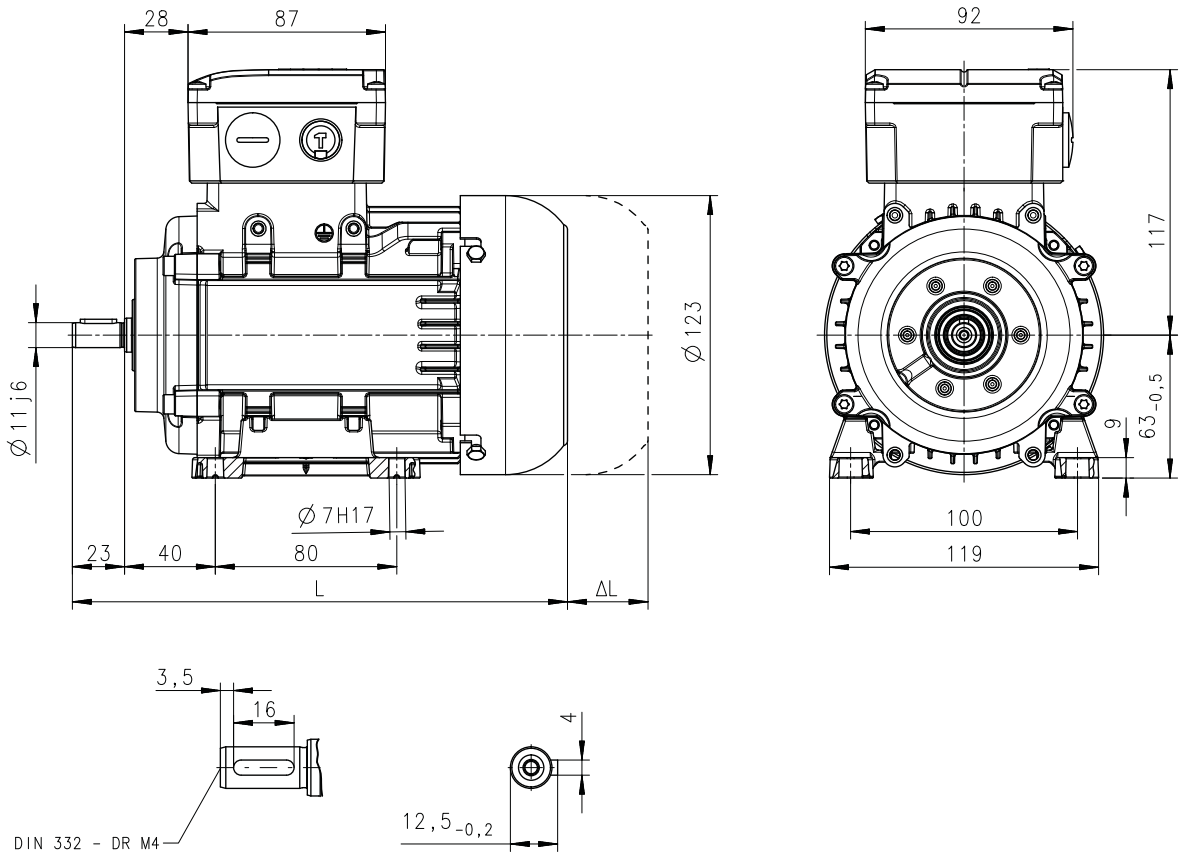

8800858-00

Motor			m550-H63/S4	m550-H63/M4	m550-H63/L4
Motor length	L	mm	219		

ΔL ▶ [Additional lengths](#)  84



Design B5

DIN 332 - DR M4

Technical data


Dimensions
Basic dimensions



m550-H63

Self-ventilated motors

Design B14

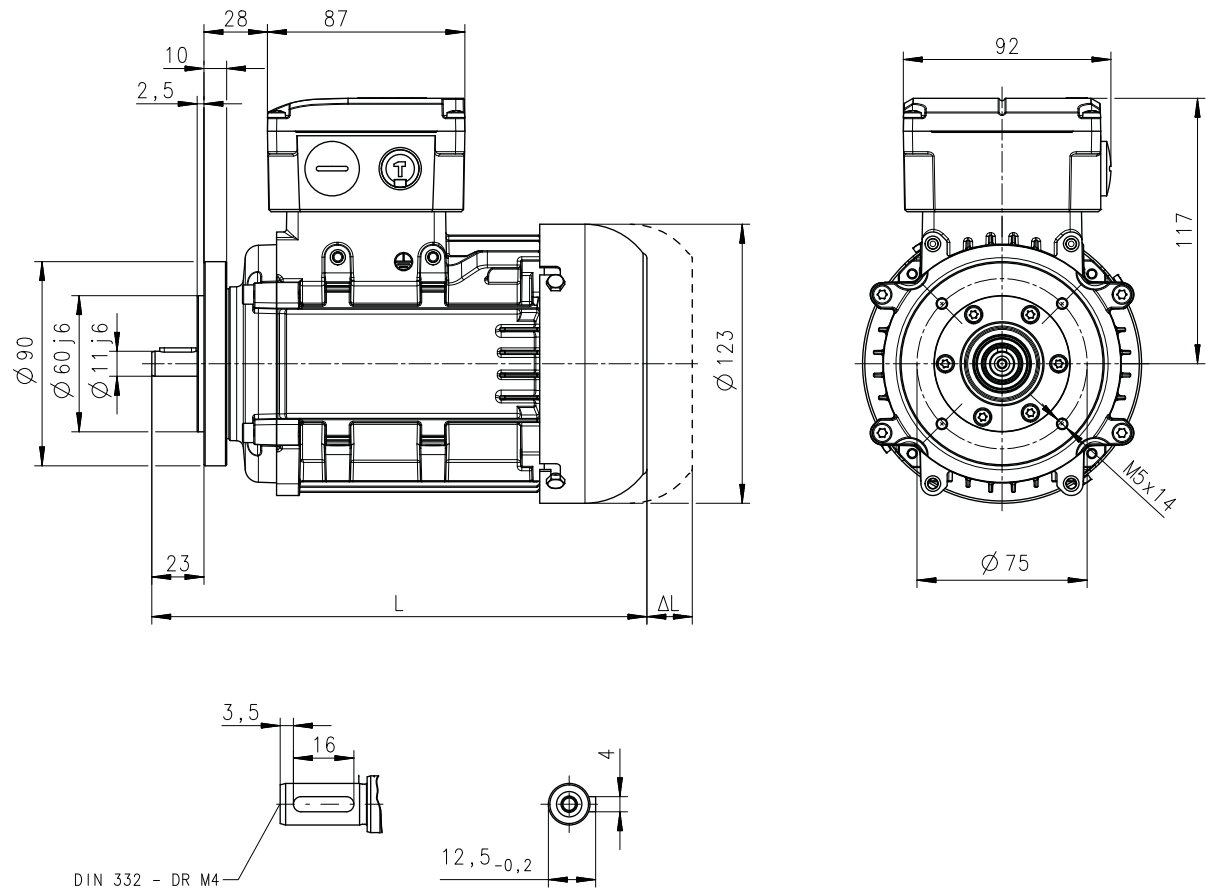

8800860-00

Motor			m550-H63/S4	m550-H63/M4	m550-H63/L4
Motor length	L	mm	219		

ΔL ▶ [Additional lengths](#) 84




Technical data

Dimensions
Basic dimensions

m550-H71

Self-ventilated motors

Design B3

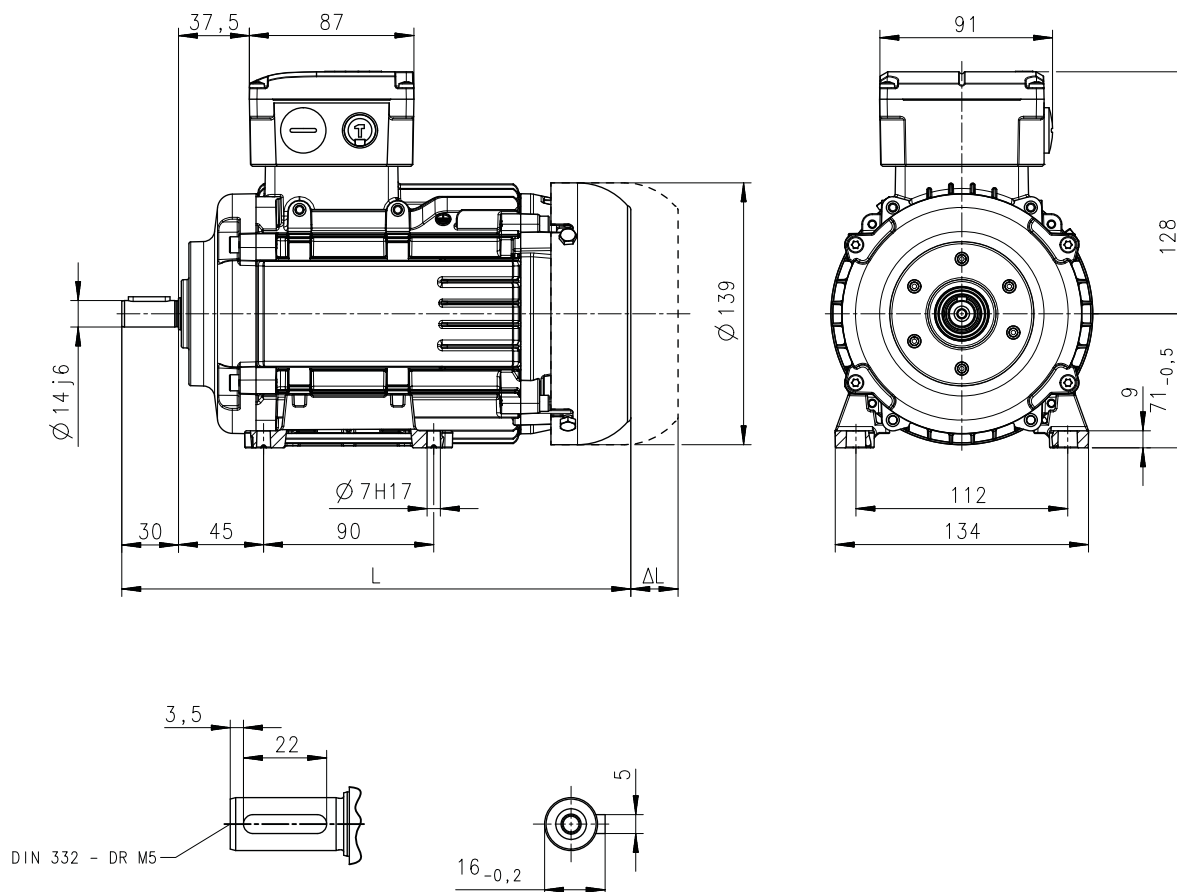

8801007-00

Motor			m550-H71/M4	m550-H71/L4
Motor length	L	mm	269	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-H71

Self-ventilated motors

Design B5

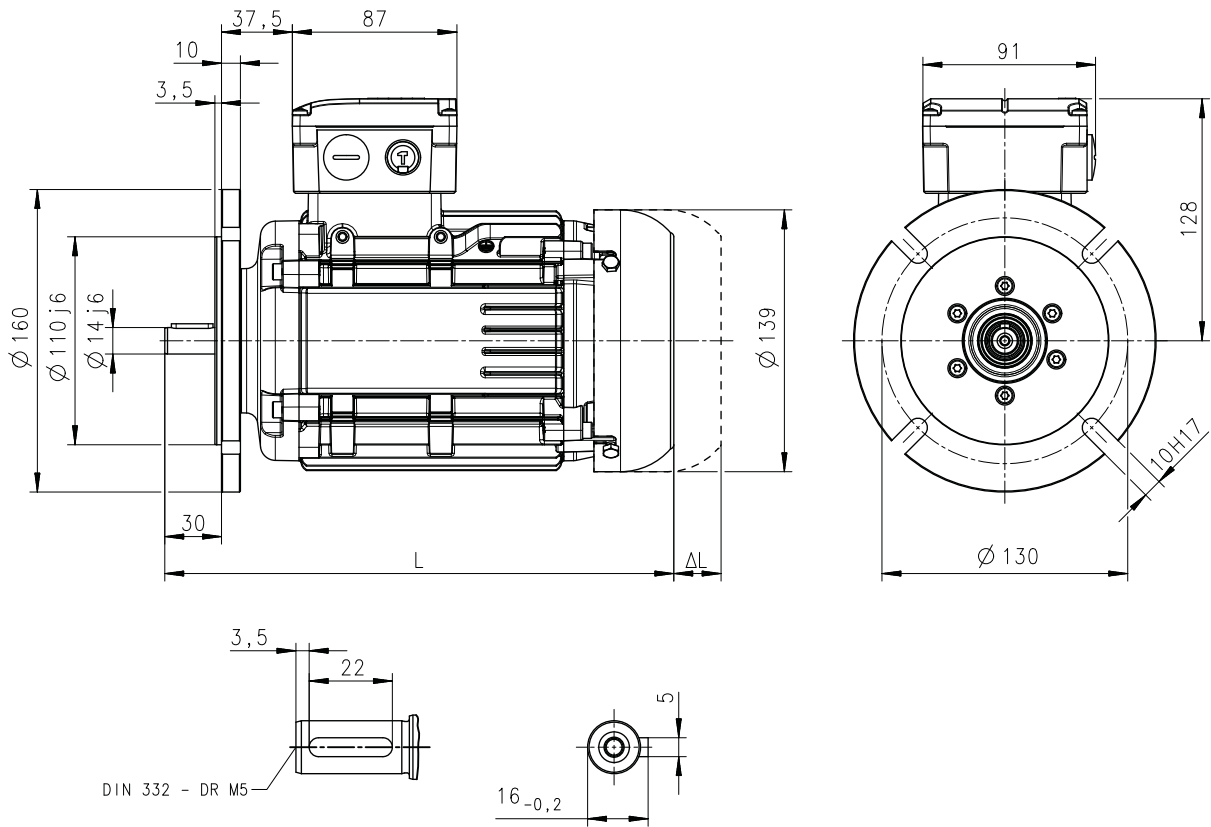

8801008-00

Motor			m550-H71/M4	m550-H71/L4
Motor length	L	mm	269	


ΔL ▶ [Additional lengths](#) 84



m550-H71

Self-ventilated motors

Design B14

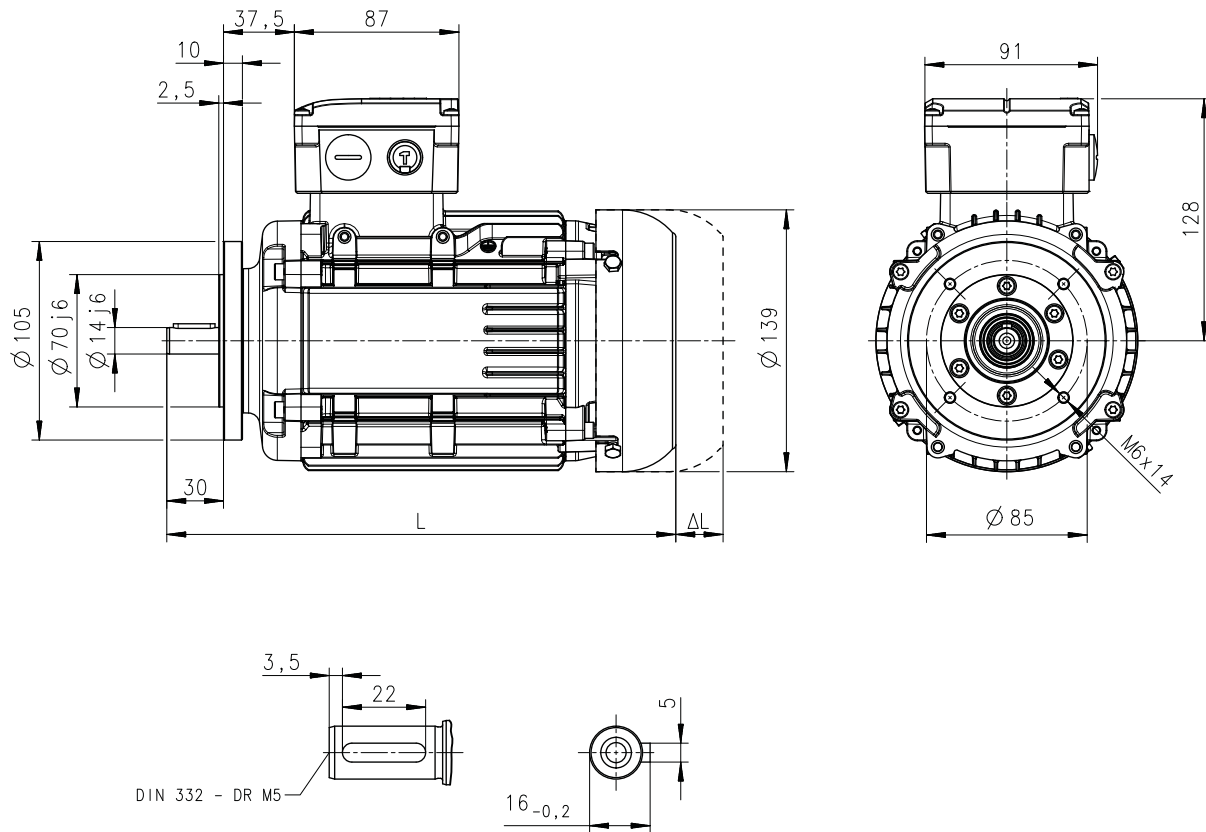

8801009-00

Motor			m550-H71/M4	m550-H71/L4
Motor length	L	mm	269	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P80

Self-ventilated motors

Design B3

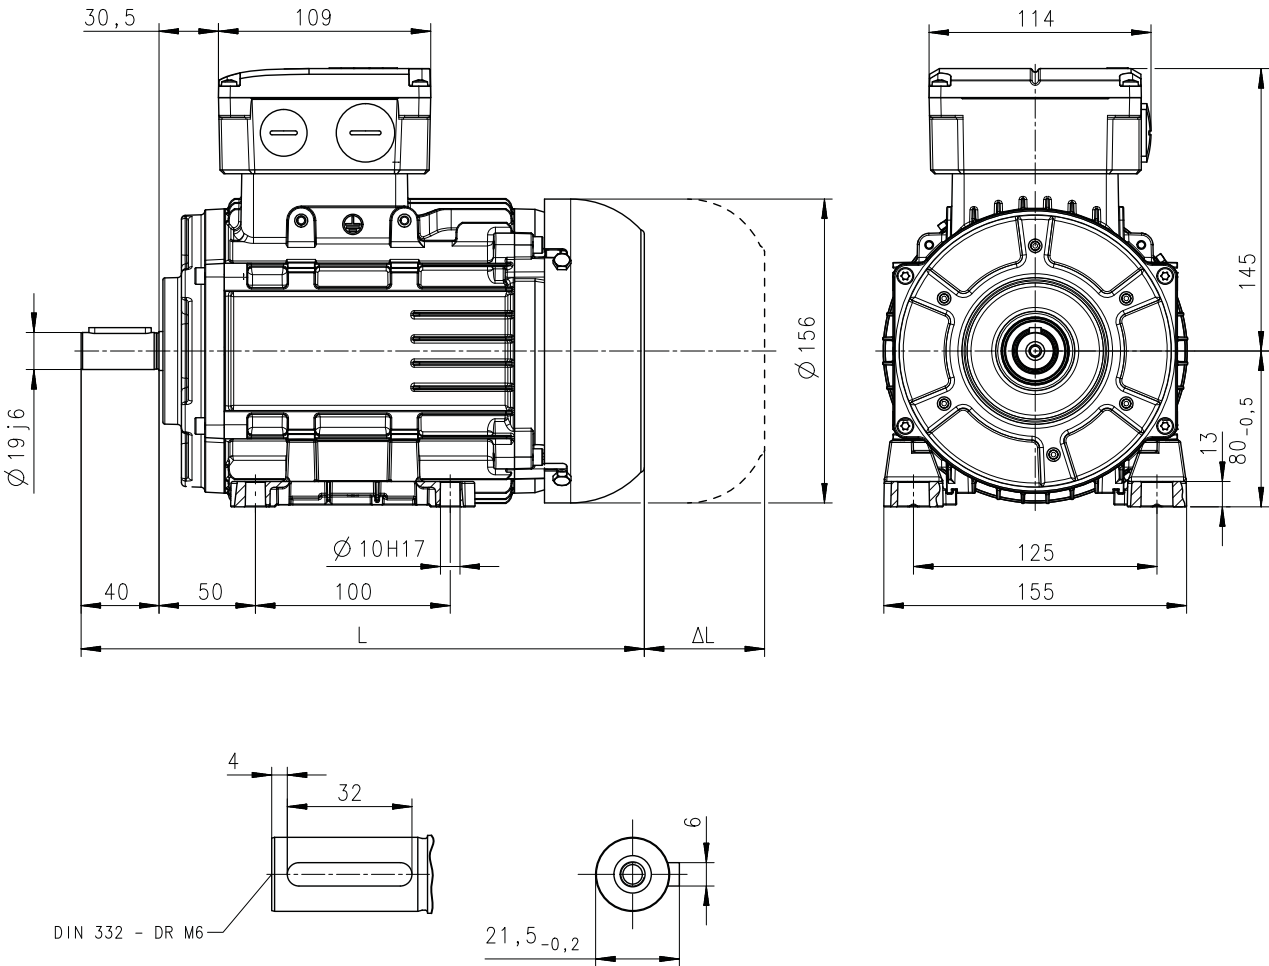

8800861-00

Motor			m550-P80/M4
Motor length	L	mm	290

ΔL ▶ Additional lengths 84



Design B5

Technical data


Dimensions
Basic dimensions



m550-P80

Self-ventilated motors

Design B14 (FT100)

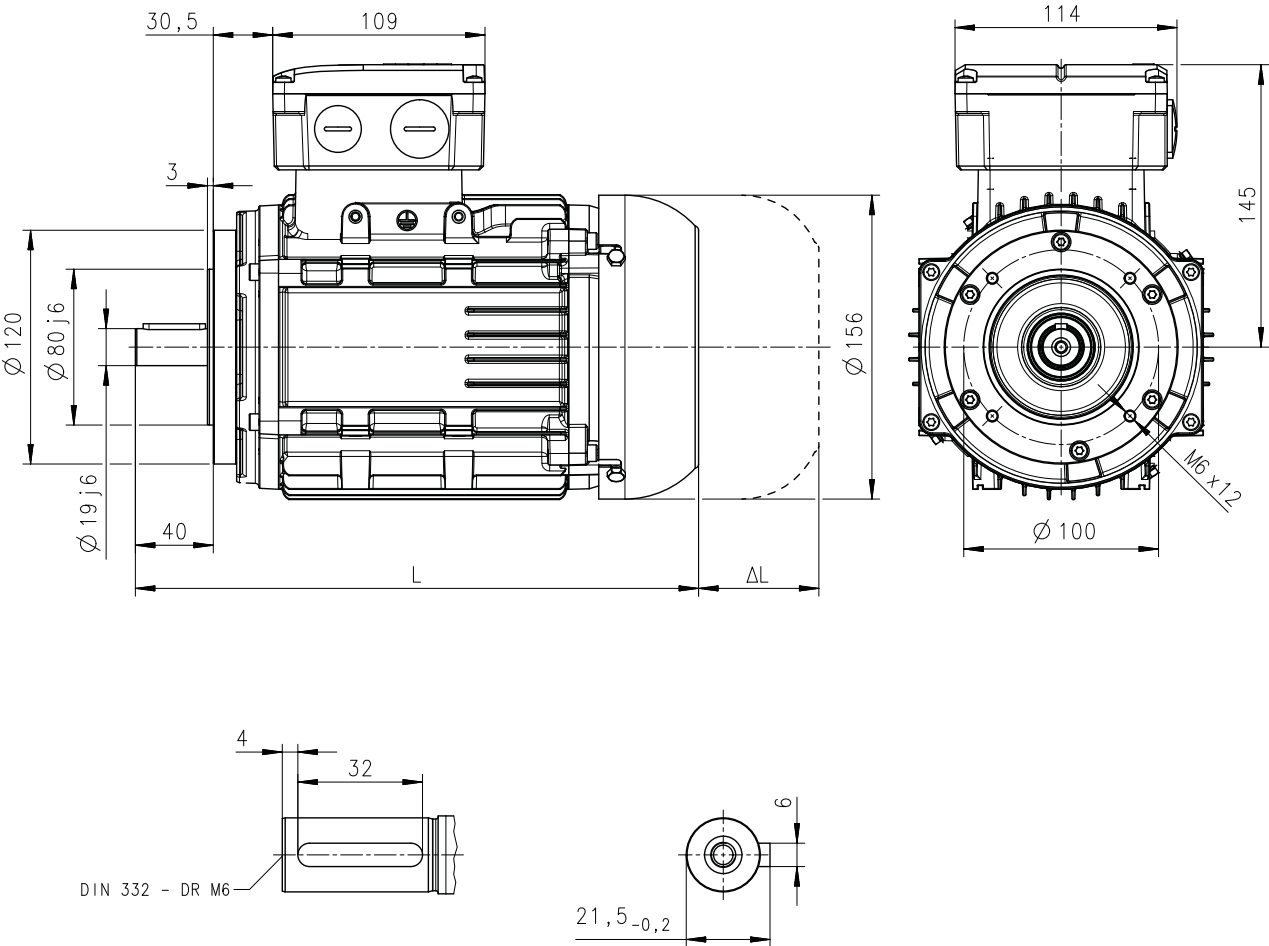


8800863-00

Motor			m550-P80/M4
Motor length	L	mm	290

ΔL ▶ [Additional lengths](#) 84



Design B14 (FT130)



Δ L ▶ Additional lengths 84

Technical data


Dimensions
Basic dimensions



m550-P90

Self-ventilated motors

Design B3

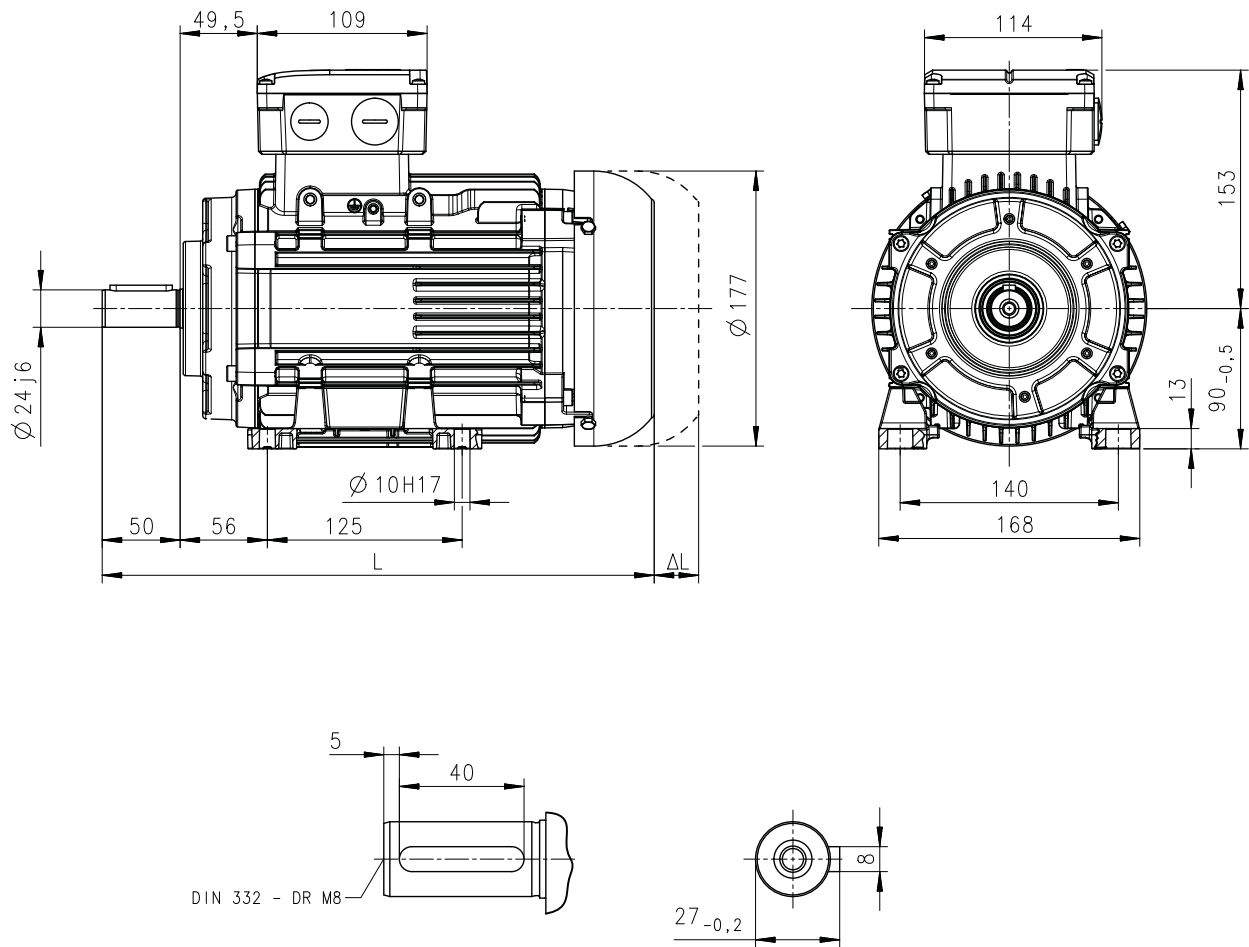

8800917-00

Motor			m550-P90/M4	m550-P90/L4
Motor length	L	mm	355	


ΔL ▶ Additional lengths 84



m550-P90

Self-ventilated motors

Design B5

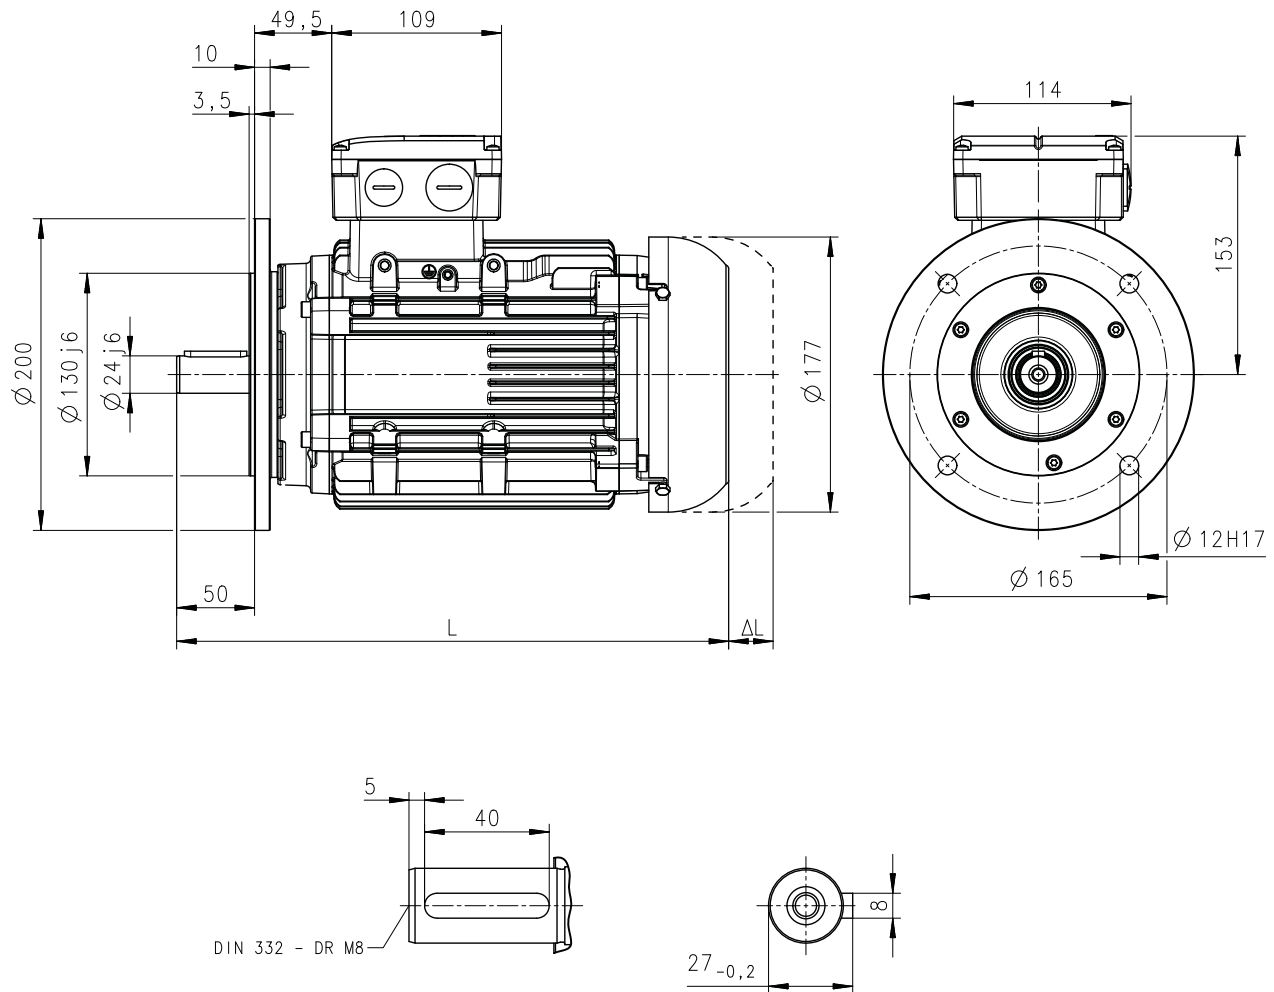

8800918-00

Motor			m550-P90/M4	m550-P90/L4
Motor length	L	mm	355	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P90

Self-ventilated motors

Design B14 (FT115)

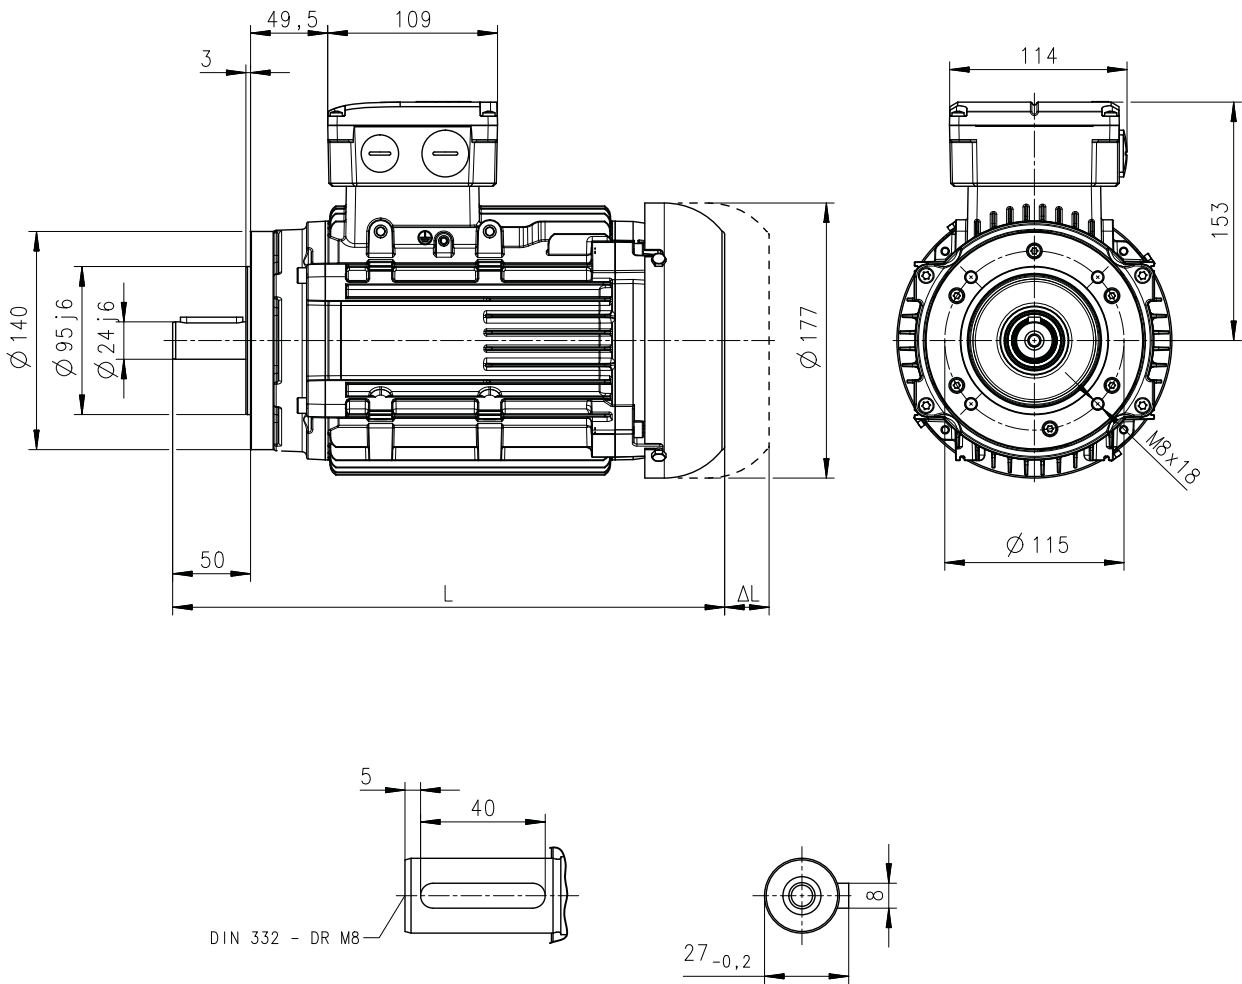

8800919-00

Motor			m550-P90/M4	m550-P90/L4
Motor length	L	mm	355	

ΔL ▶ Additional lengths 84





Technical data

Dimensions
Basic dimensions

m550-P90

Self-ventilated motors

Design B14 (FT130)

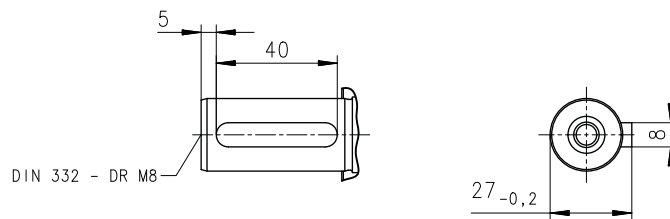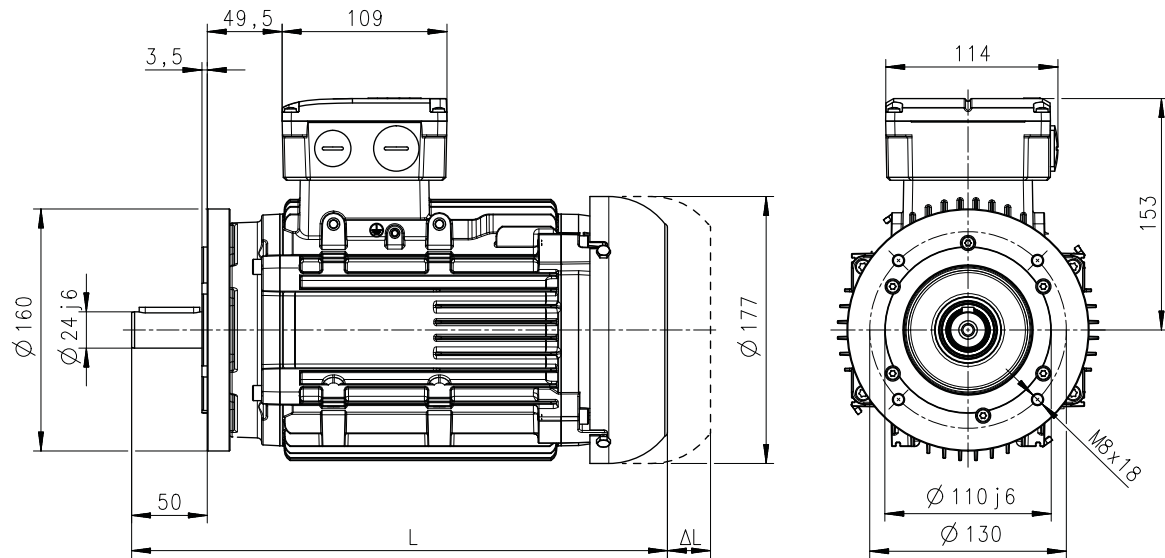

8800920-00

Motor			m550-P90/M4	m550-P90/L4
Motor length	L	mm	355	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P100

Self-ventilated motors

Design B3

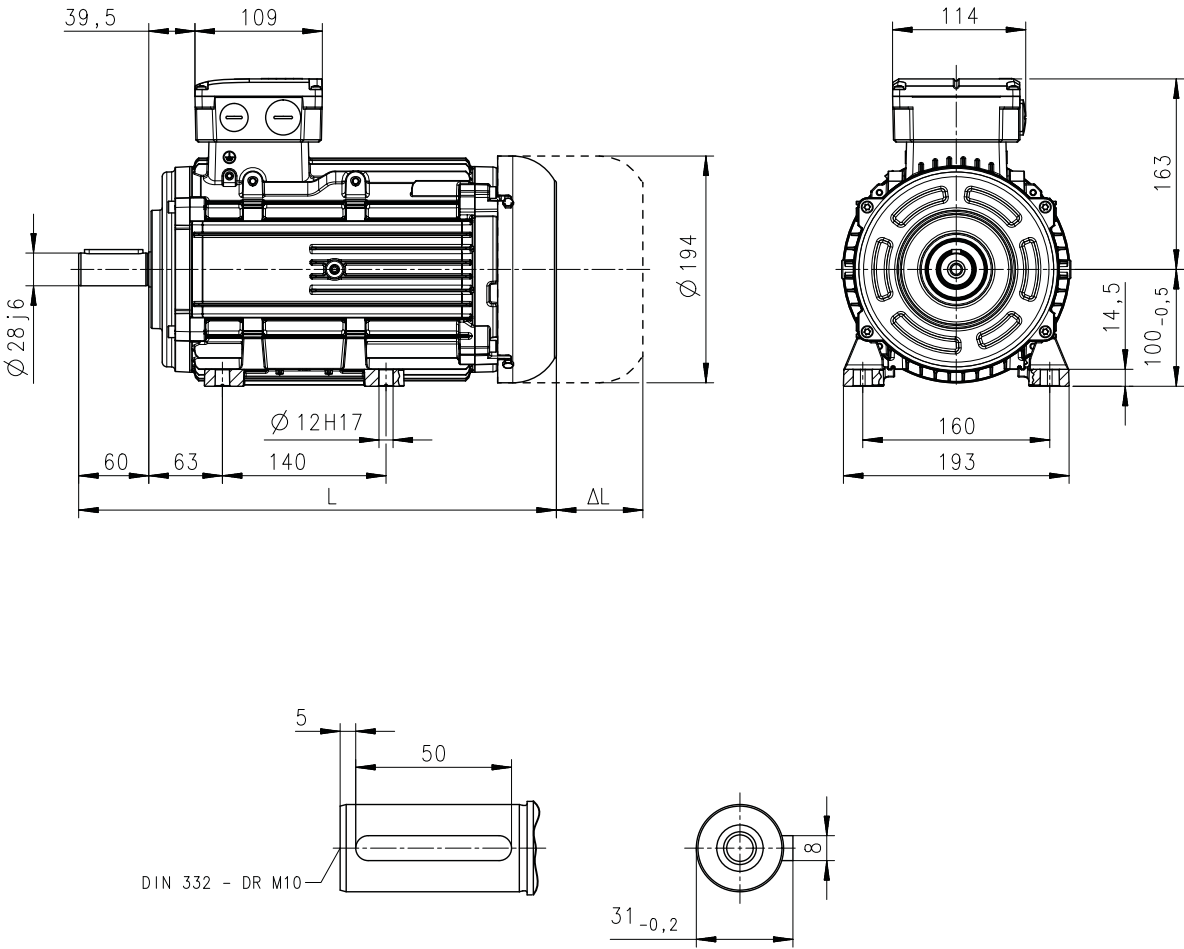

8800914-00

Motor			m550-P100/M4	m550-P100/L4
Motor length	L	mm	409	

ΔL ▶ Additional lengths  84




Technical data

Dimensions
Basic dimensions

m550-P100

Self-ventilated motors

Design B5

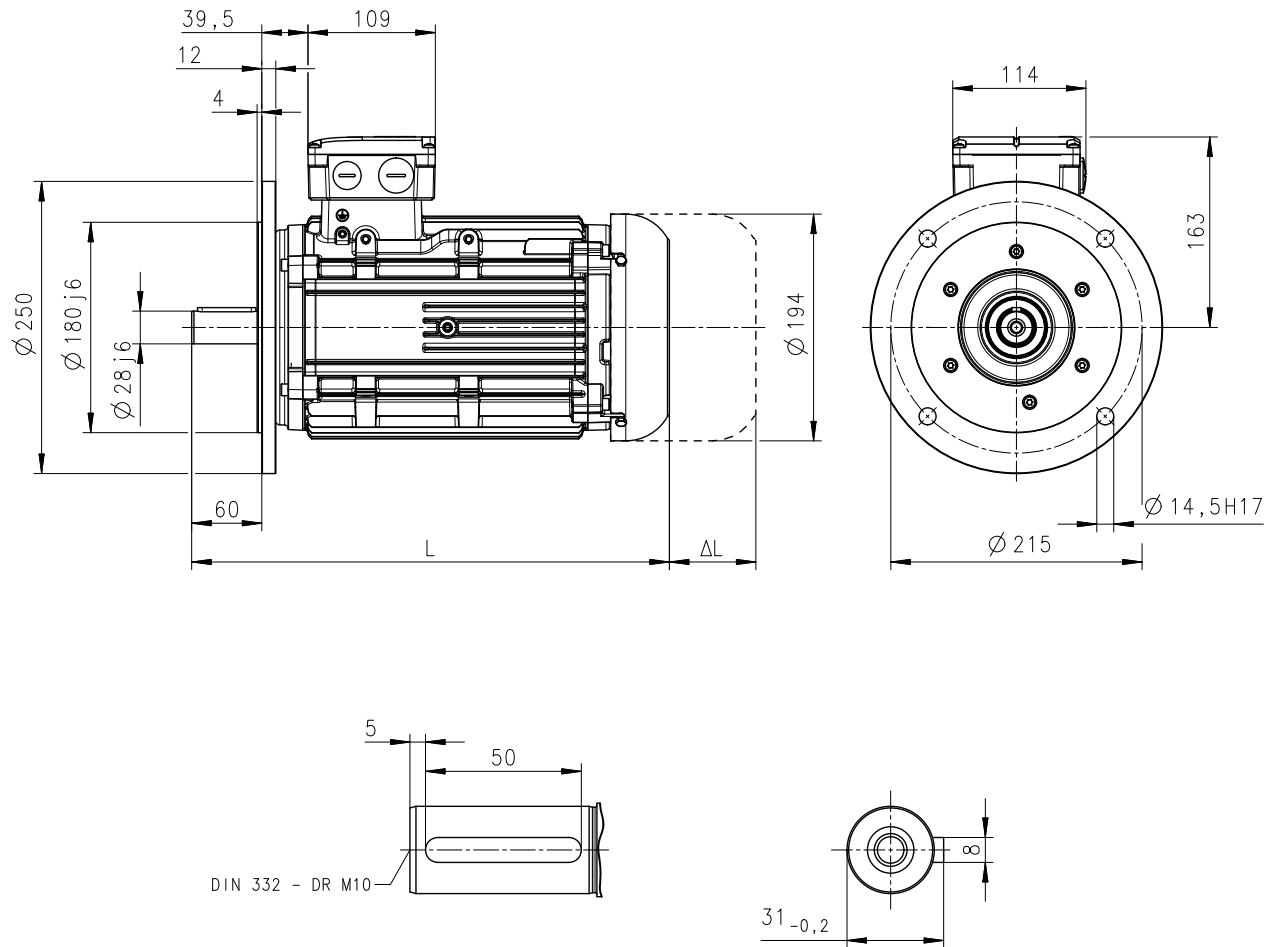

8800915-00

Motor			m550-P100/M4	m550-P100/L4
Motor length	L	mm	409	

ΔL ▶ Additional lengths  84

Technical data


Dimensions
Basic dimensions



m550-P100

Self-ventilated motors

Design B14

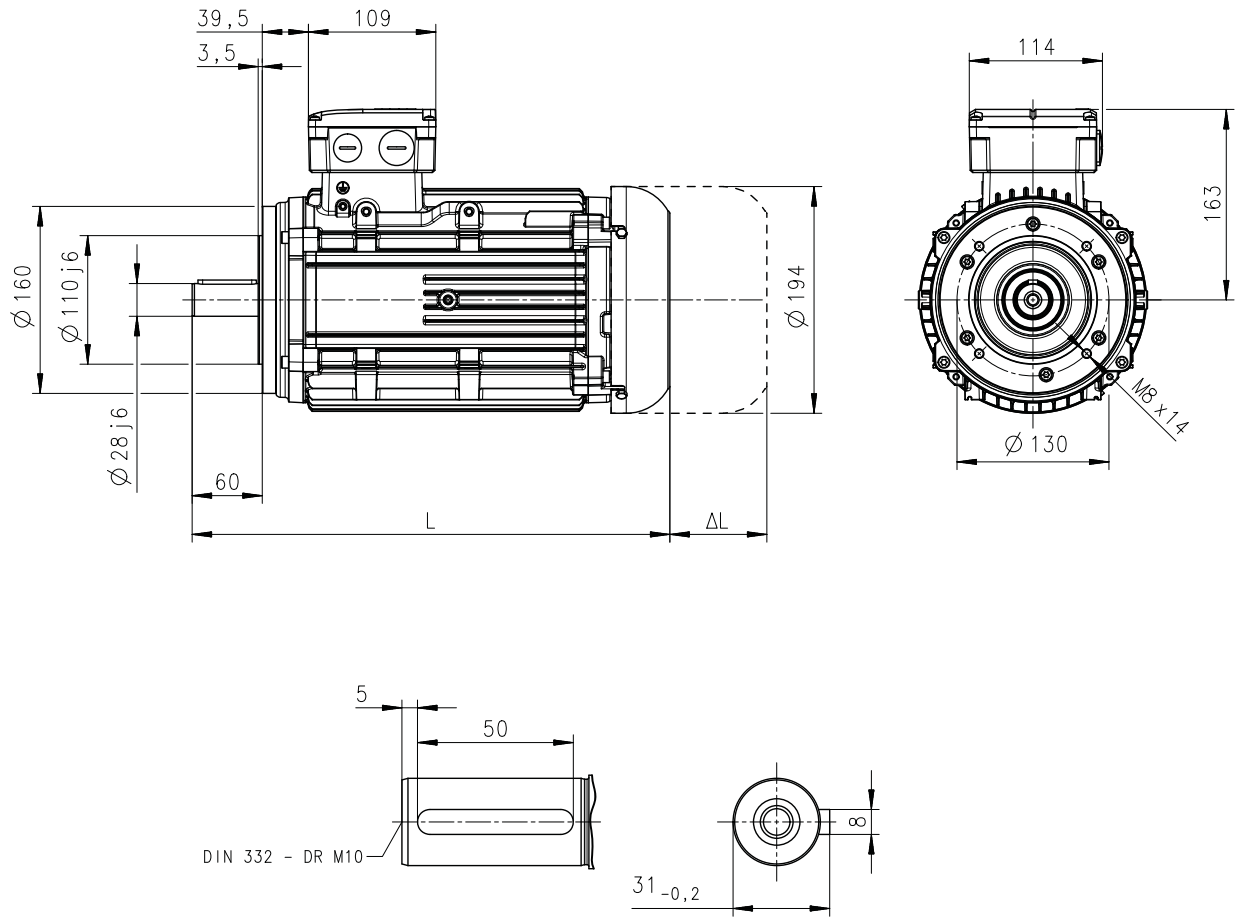

8800916-00

Motor			m550-P100/M4	m550-P100/L4
Motor length	L	mm	409	

ΔL ▶ Additional lengths 84




Technical data

Dimensions
Basic dimensions

m550-P112

Self-ventilated motors

Design B3

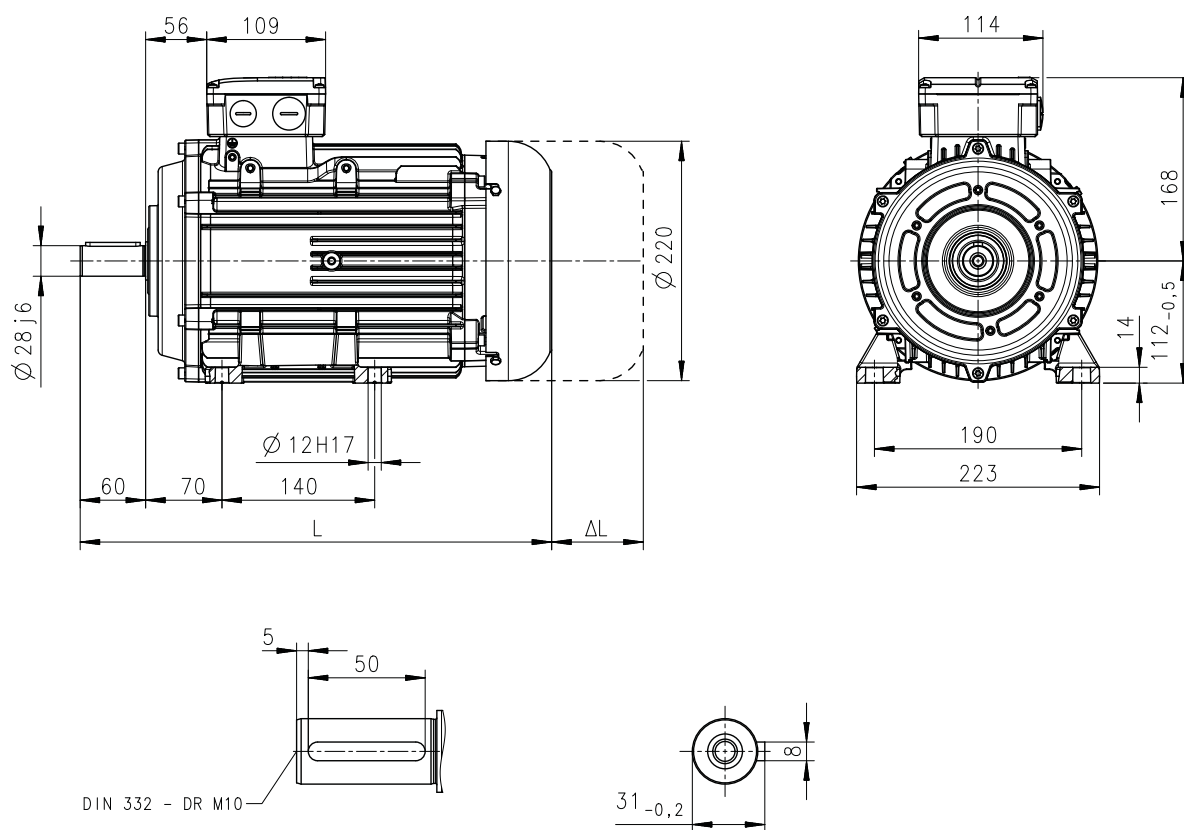

8800964-00

Motor			m550-P112/M4
Motor length	L	mm	433

ΔL ▶ [Additional lengths](#) 84

Technical data



Dimensions
Basic dimensions



m550-P112

Self-ventilated motors

Design B5

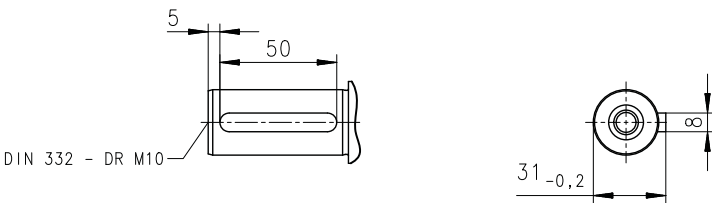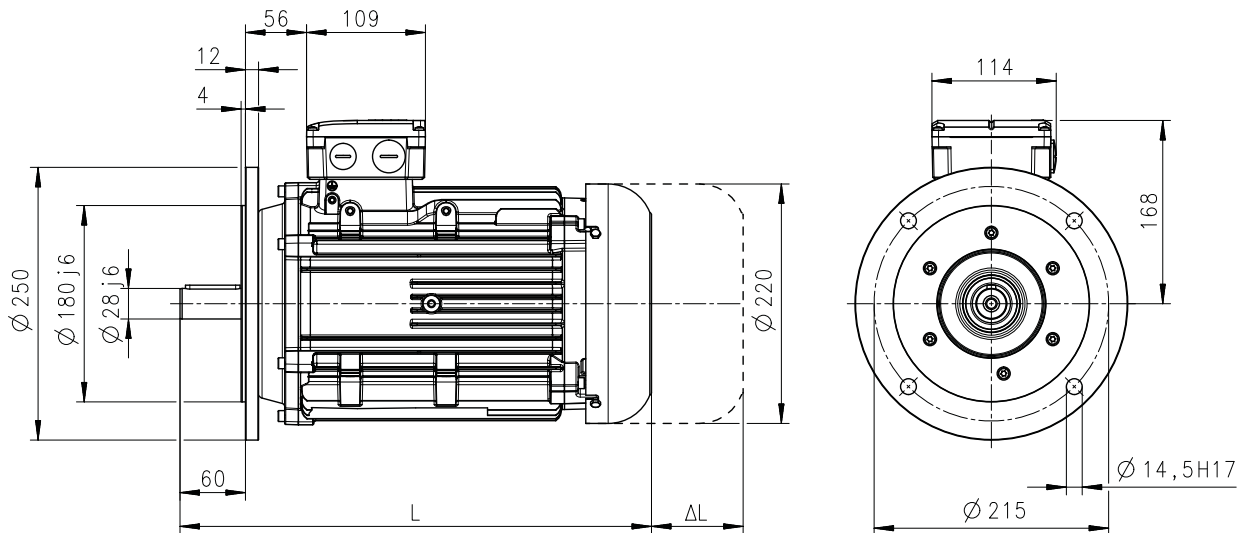

8800965-00

Motor			m550-P112/M4
Motor length	L	mm	433

ΔL ▶ Additional lengths  84





Technical data

Dimensions
Basic dimensions

m550-P112

Self-ventilated motors

Design B14

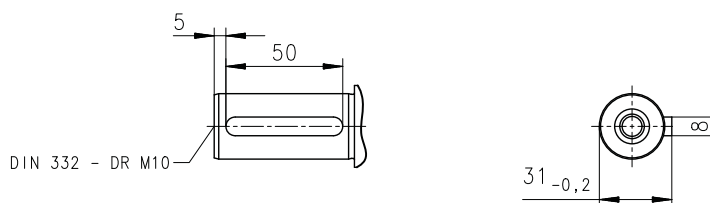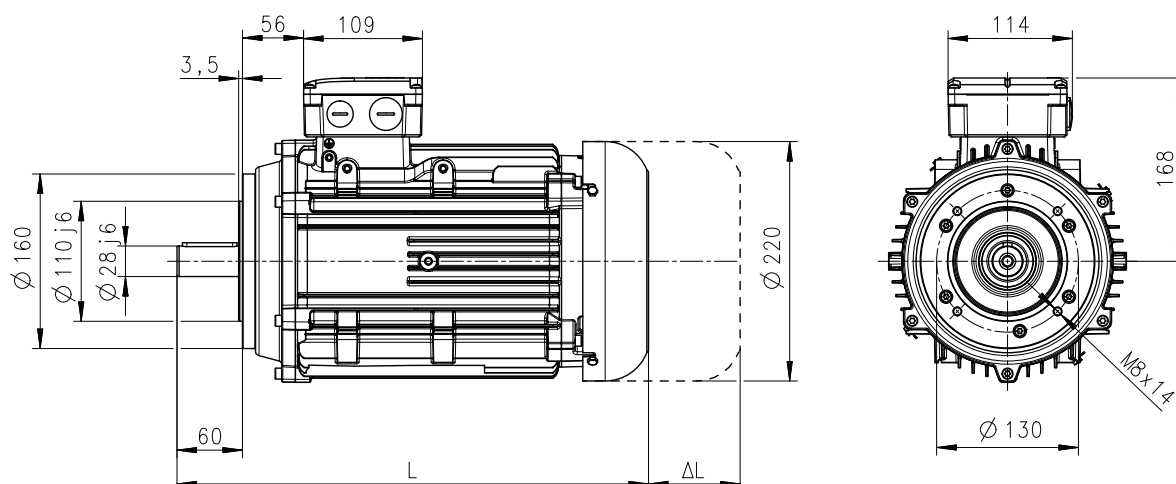

8800966-00

Motor			m550-P112/M4
Motor length	L	mm	433

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P132

Self-ventilated motors

Design B3

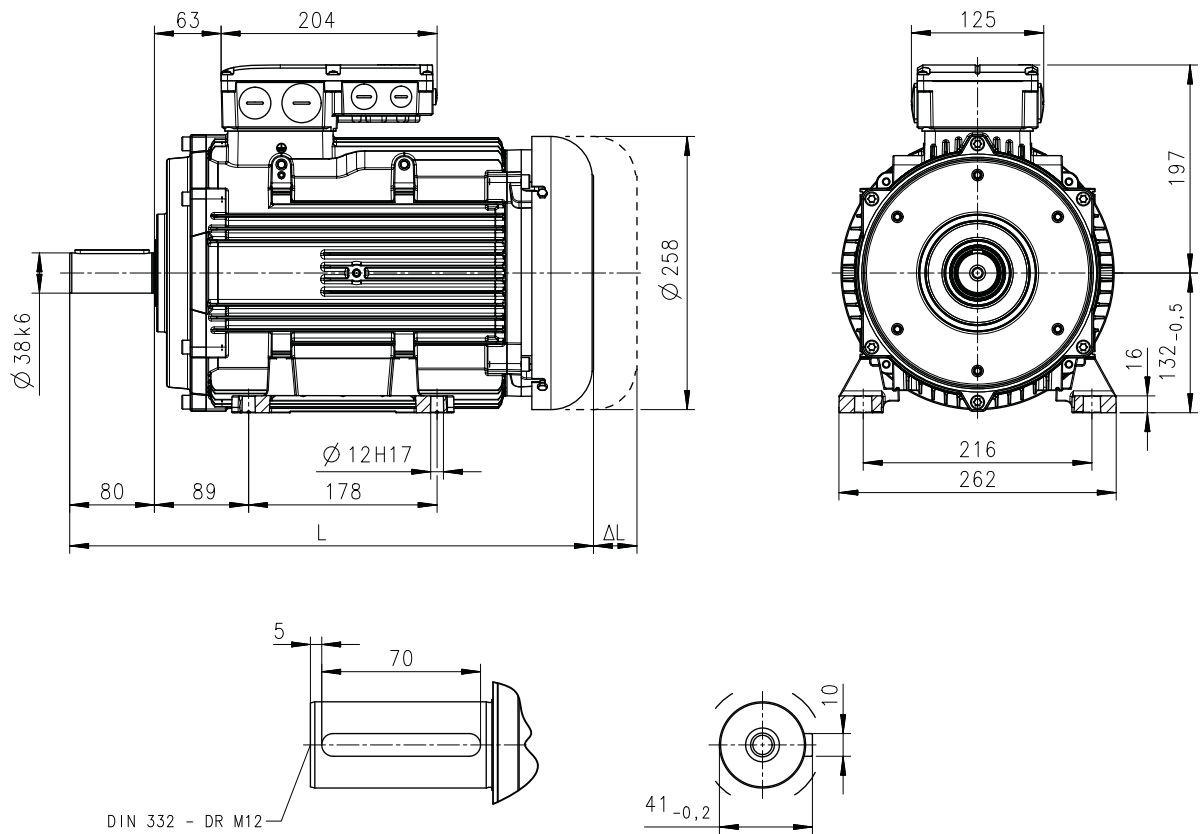

8800948-00

Motor			m550-P132/M4	m550-P132/L4
Motor length	L	mm	495	


Δ L ▶ [Additional lengths](#) 84



m550-P132

Self-ventilated motors

Design B5

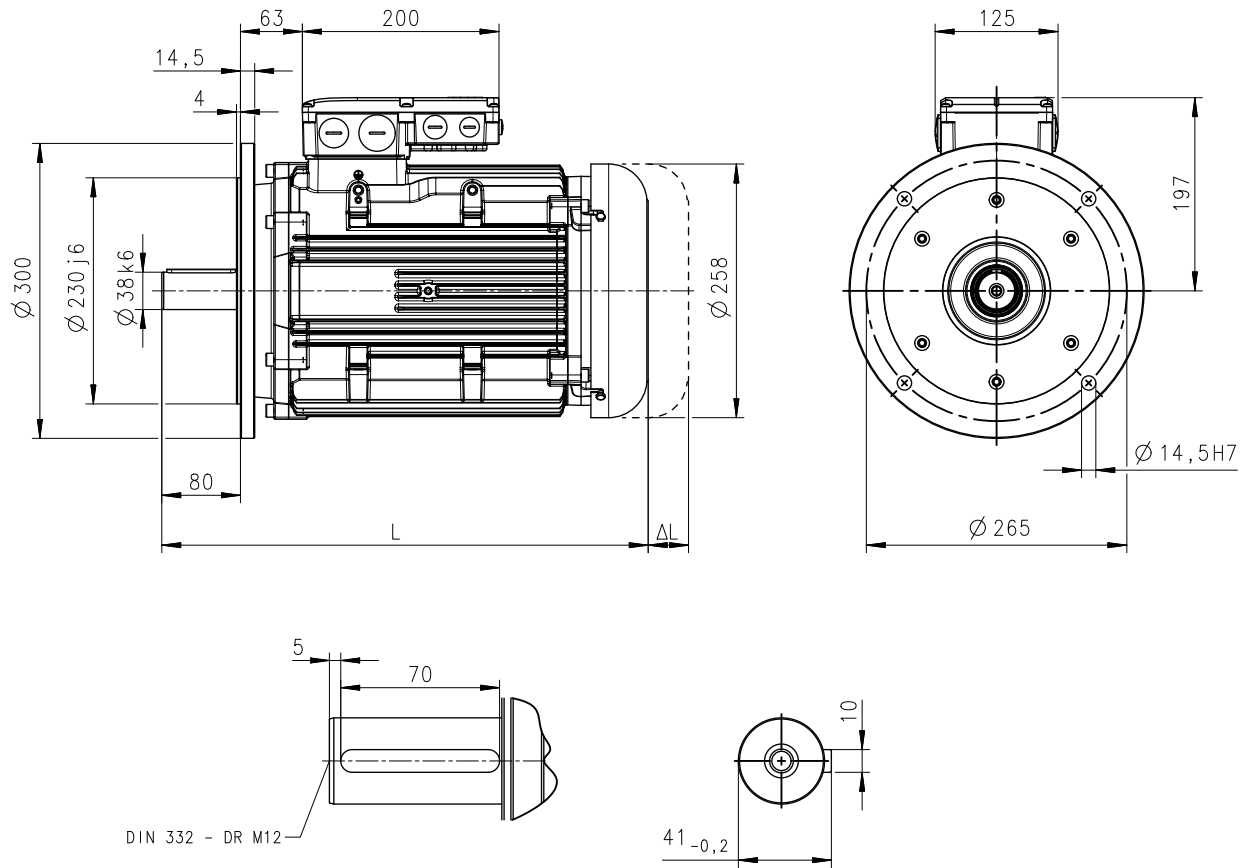

8800949-00

Motor			m550-P132/M4	m550-P132/L4
Motor length	L	mm	495	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P160

Self-ventilated motors

Design B3

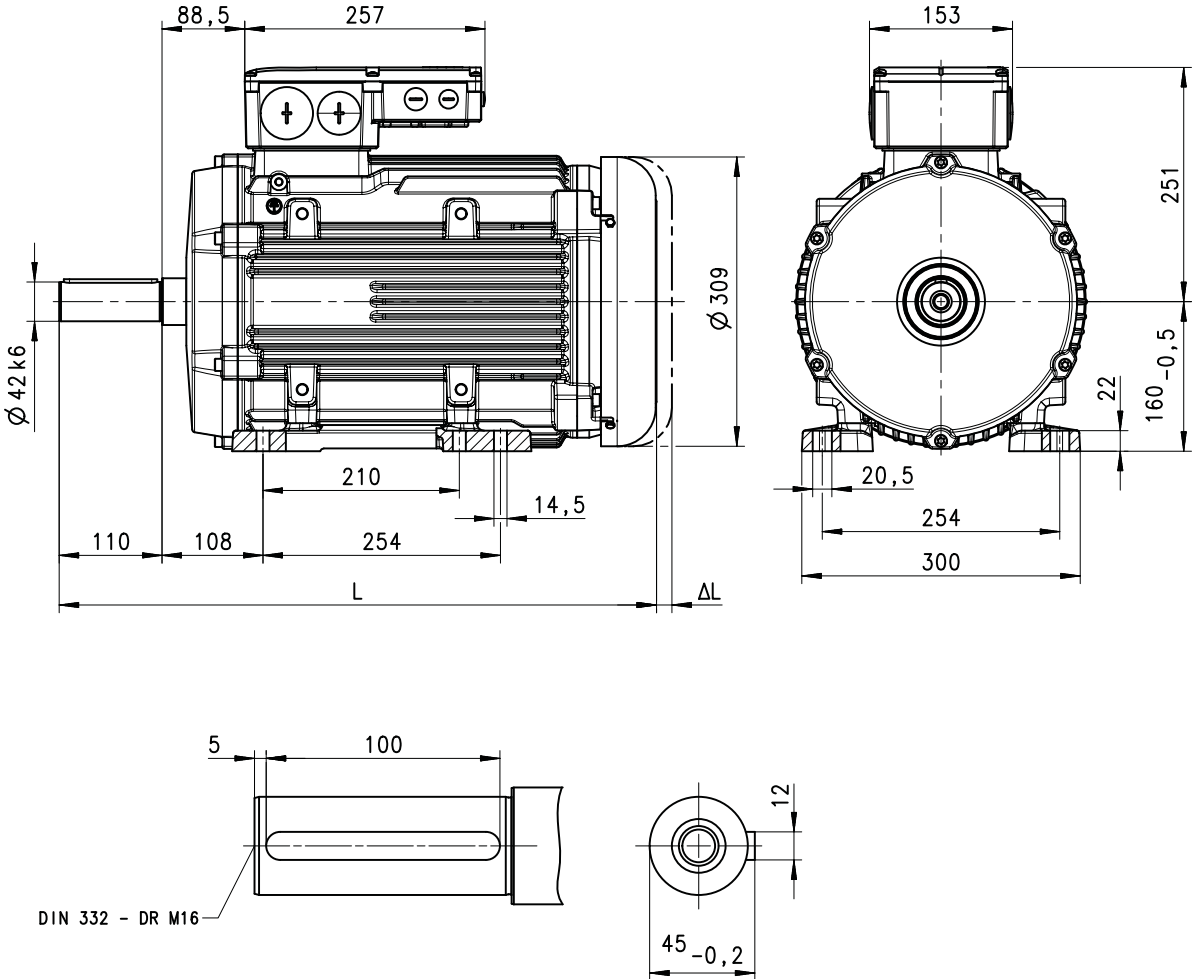

8801010-02

Motor			m550-P160/M4	m550-P160/L4
Motor length	L	mm	639	


ΔL ▶ Additional lengths 84



m550-P160

Self-ventilated motors

Design B5

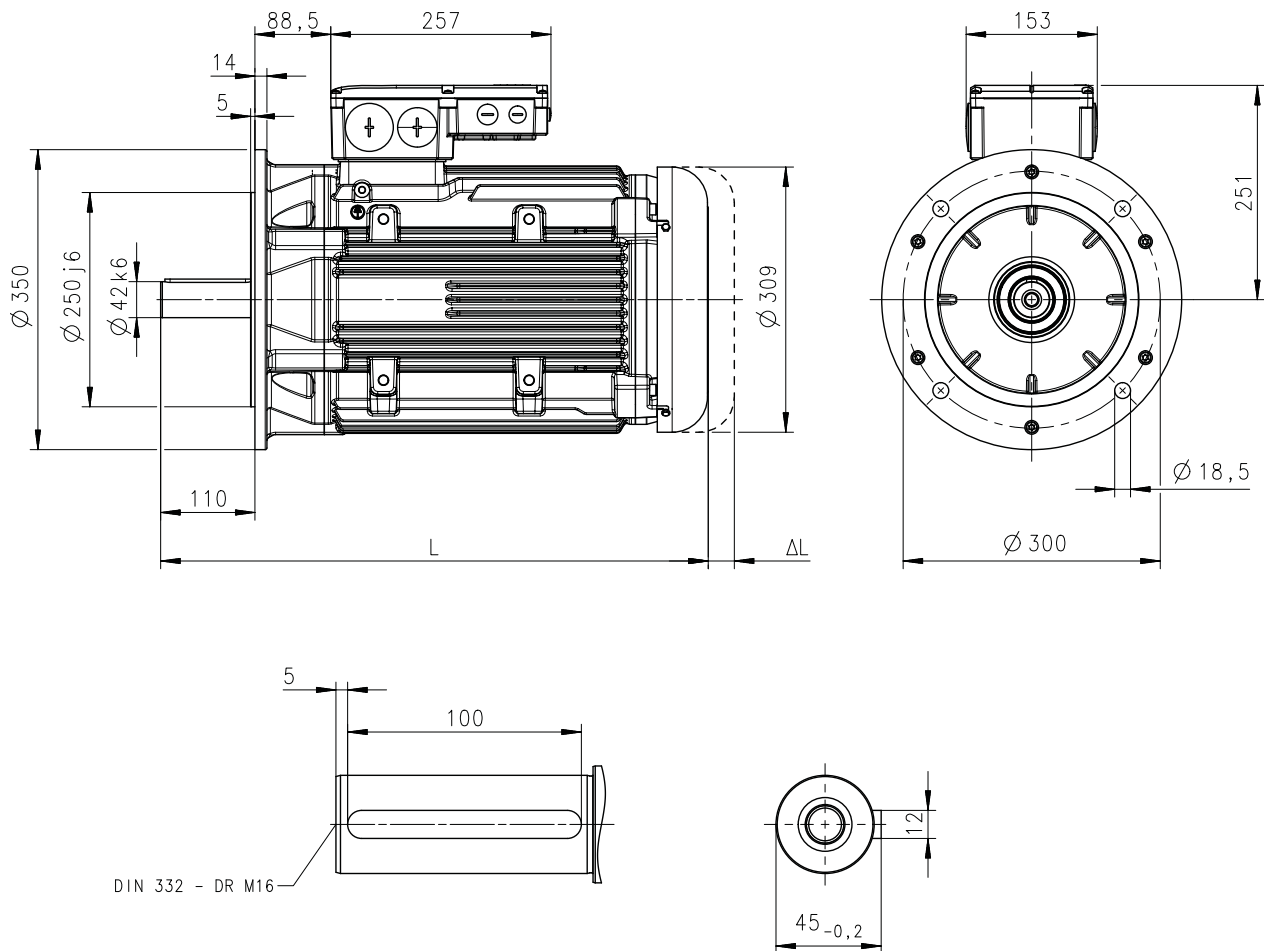

8801011-00

Motor			m550-P160/M4	m550-P160/L4
Motor length	L	mm	639	

ΔL ▶ [Additional lengths](#) 84

Technical data


Dimensions
Basic dimensions



m550-P180

Self-ventilated motors

Design B3

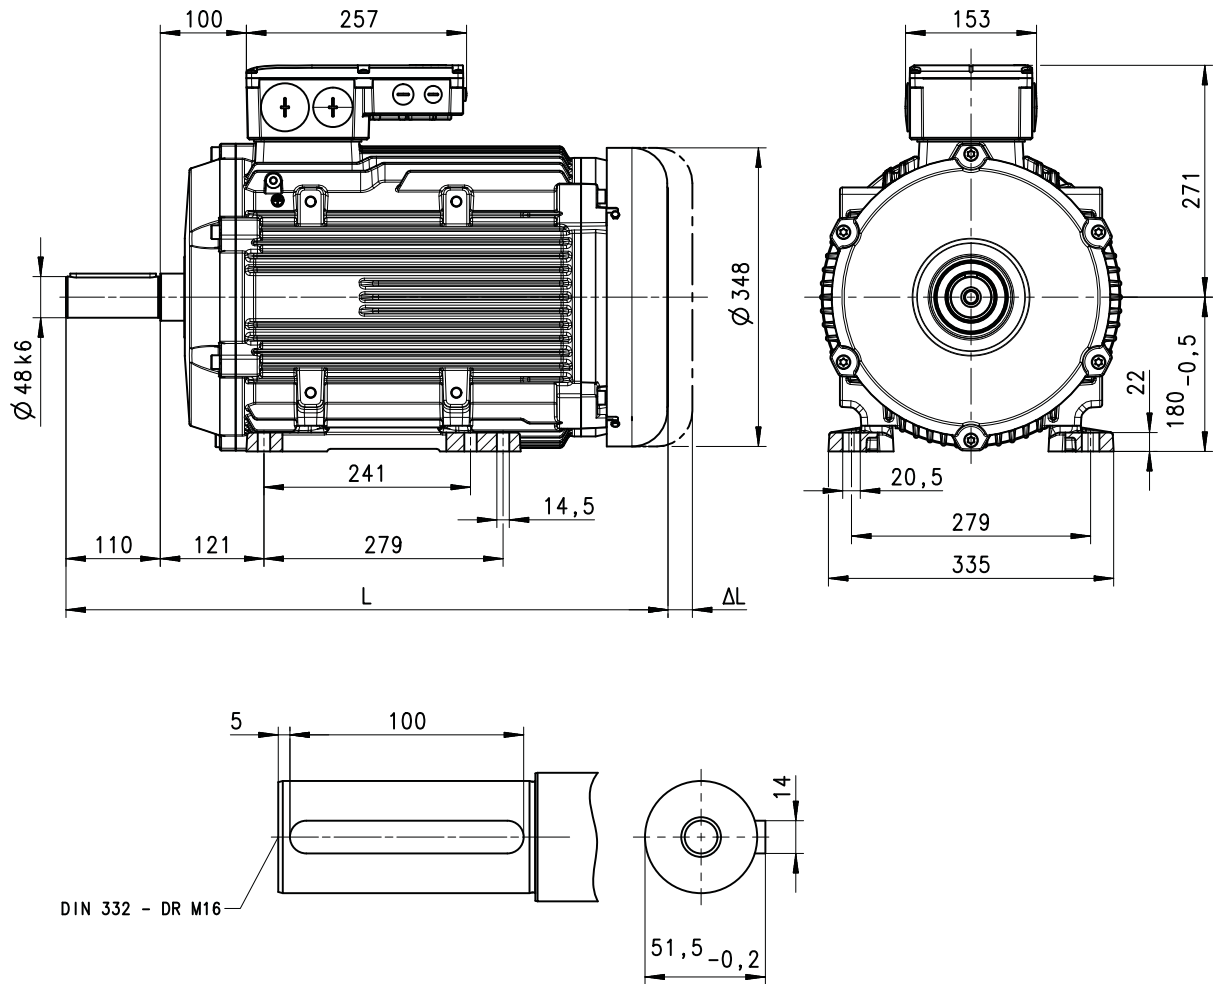

DIN 332 - DR M16

8801012-02

Motor			m550-P180/M4	m550-P180/L4
Motor length	L	mm	703	


ΔL ▶ Additional lengths 84



m550-P180

Self-ventilated motors

Design B5

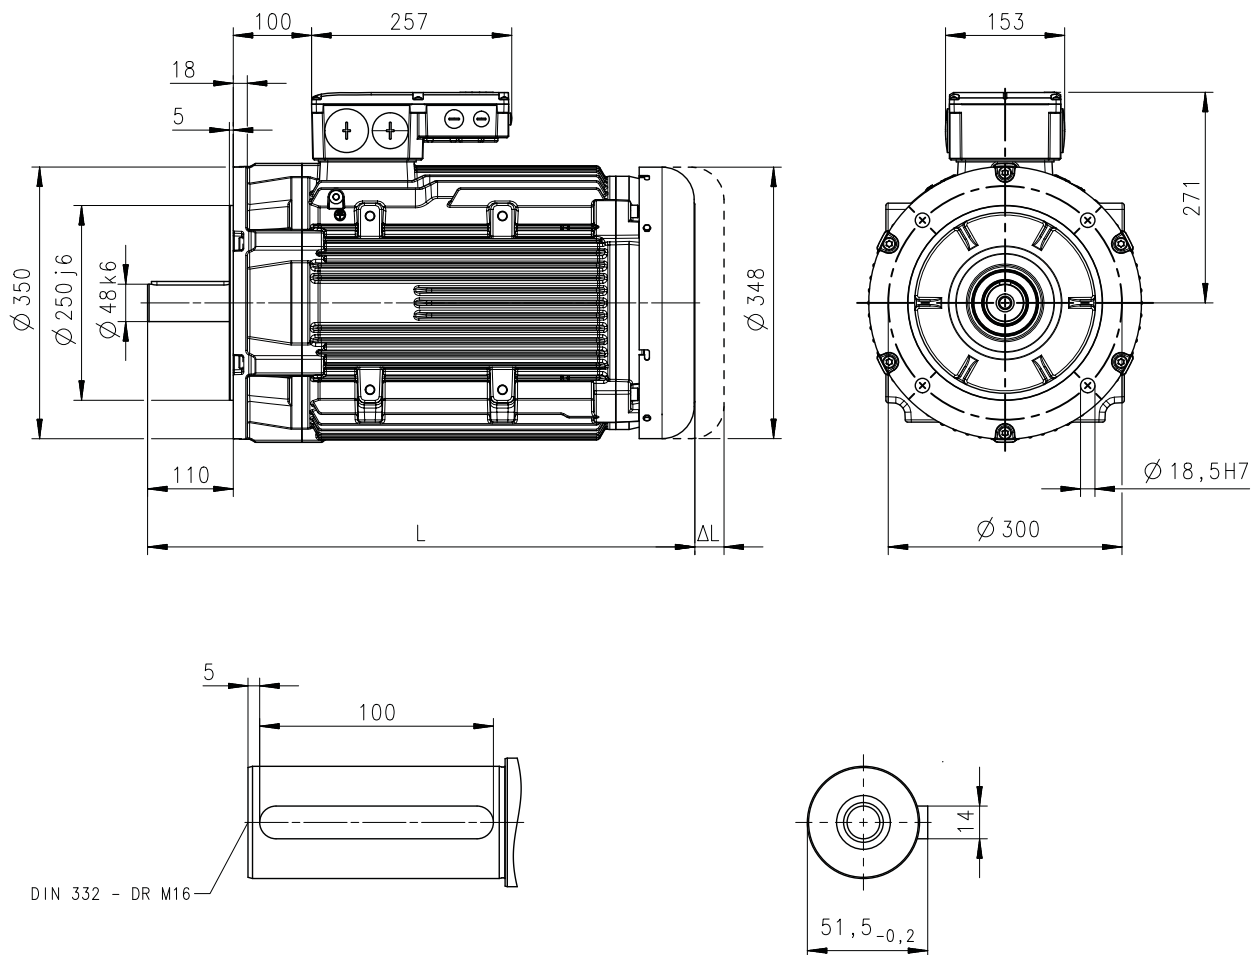

8801013-00

Motor			m550-P180/M4	m550-P180/L4
Motor length	L	mm	703	


ΔL ▶ Additional lengths [84](#)



7.6.2 Integrated inverters

i550/i650 motec

Supply voltage 3x 230/240 V

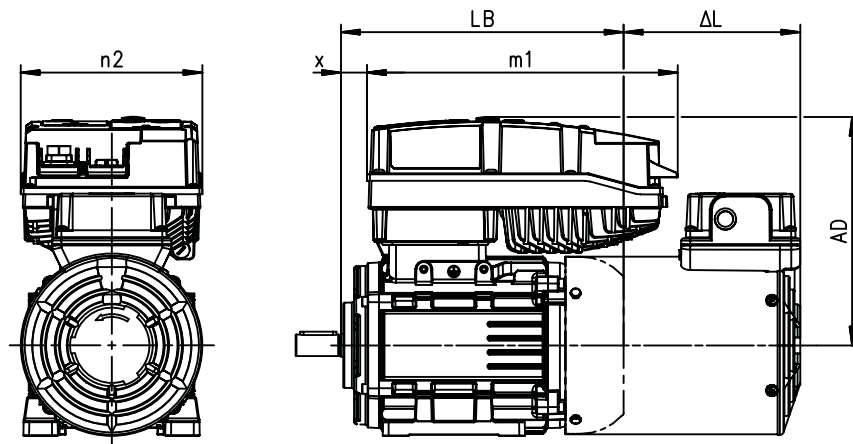

8801671-1

Rated frequency 50/60 Hz

Motor	i550 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/L4	i550-M0.37/230-3	179	265	159	11
m550-H71/M4	i550-M0.37/230-3	190	265	159	21
m550-H71/L4	i550-M0.55/230-3	190	265	159	21
m550-P80/M4	i550-M0.75/230-3	203	265	159	25
m550-P90/M4	i550-M1.1/230-3	211	265	159	44
m550-P90/L4	i550-M1.5/230-3	229	265	159	44
m550-P100/M4	i550-M2.2/230-3	239	265	159	34
m550-P100/L4	i550-M3.0/230-3	239	265	159	34
m550-P112/M4	i550-M4.0/230-3	269	359	211	39
m550-P132/M4	i550-M5.5/230-3	289	359	211	48
m550-P132/L4	i550-M7.5/230-3	341	443	280	13


Motor	i650 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/L4	i650-M0.37/230-3	179	265	159	11
m550-H71/M4	i650-M0.37/230-3	190	265	159	21
m550-H71/L4	i650-M0.55/230-3	190	265	159	21
m550-P80/M4	i650-M0.75/230-3	203	265	159	25
m550-P90/M4	i650-M1.1/230-3	211	265	159	44
m550-P90/L4	i650-M1.5/230-3	229	265	159	44
m550-P100/M4	i650-M2.2/230-3	239	265	159	34
m550-P100/L4	i650-M3.0/230-3	239	265	159	34
m550-P112/M4	i650-M4.0/230-3	269	359	211	39
m550-P132/M4	i650-M5.5/230-3	289	359	211	48
m550-P132/L4	i650-M7.5/230-3	341	443	280	13

Dimensions LB and ΔL ▶ [Basic dimensions](#) 54



i550/i650 motec

Supply voltage 3x 400/480 V

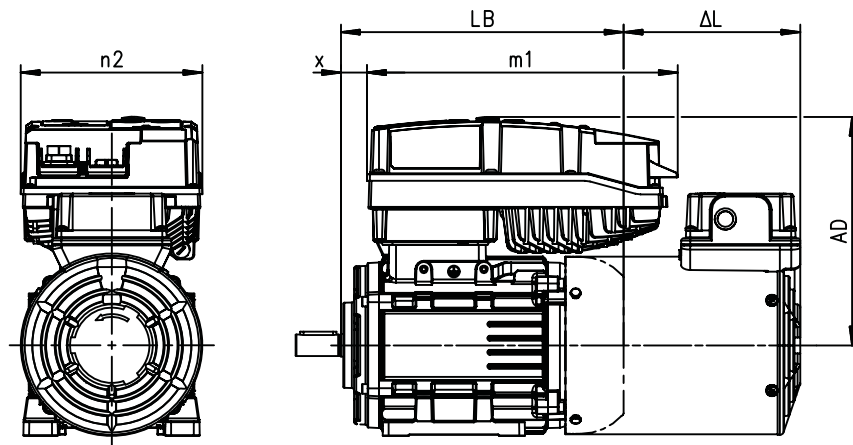

8801671-1

Rated frequency 50/60 Hz

Motor	i550 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/L4	i550-M0.37/400-3	179	265	159	11
m550-H71/M4	i550-M0.37/400-3	190	265	159	21
m550-H71/L4	i550-M0.55/400-3	190	265	159	21
m550-P80/M4	i550-M0.75/400-3	203	265	159	25
m550-P90/M4	i550-M1.1/400-3	211	265	159	44
m550-P90/L4	i550-M1.5/400-3	211	265	159	44
m550-P100/M4	i550-M2.2/400-3	221	265	159	34
m550-P100/L4	i550-M3.0/400-3	239	265	159	34
m550-P112/M4	i550-M4.0/400-3	244	265	159	50
m550-P132/M4	i550-M5.5/400-3	264	265	159	59
m550-P132/L4	i550-M7.5/400-3	289	359	211	48

Motor	i650 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/L4	i650-M0.37/400-3	179	265	159	11
m550-H71/M4	i650-M0.37/400-3	190	265	159	21
m550-H71/L4	i650-M0.55/400-3	190	265	159	21
m550-P80/M4	i650-M0.75/400-3	203	265	159	25
m550-P90/M4	i650-M1.1/400-3	211	265	159	44
m550-P90/L4	i650-M1.5/400-3	211	265	159	44
m550-P100/M4	i650-M2.2/400-3	221	265	159	34
m550-P100/L4	i650-M3.0/400-3	239	265	159	34
m550-P112/M4	i650-M4.0/400-3	244	265	159	50
m550-P132/M4	i650-M5.5/400-3	264	265	159	59
m550-P132/L4	i650-M7.5/400-3	289	359	211	48

Technical data

Dimensions
Integrated inverters



Rated frequency 87 Hz

Motor	i550 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/S4	i550-M0.37/400-3	179	265	159	11
m550-H63/M4	i550-M0.37/400-3	179	265	159	11
m550-H63/L4	i550-M0.55/400-3	179	265	159	11
m550-H71/M4	i550-M0.75/400-3	190	265	159	21
m550-H71/L4	i550-M1.1/400-3	190	265	159	21
m550-P80/M4	i550-M1.5/400-3	203	265	159	25
m550-P90/M4	i550-M2.2/400-3	211	265	159	44
m550-P90/L4	i550-M3.0/400-3	229	265	159	44
m550-P100/M4	i550-M4.0/400-3	239	265	159	34
m550-P100/L4	i550-M5.5/400-3	239	265	159	34
m550-P112/M4	i550-M7.5/400-3	269	359	211	39
m550-P132/M4	i550-M11/400-3	-	-	-	-
m550-P132/L4	i550-M15/400-3	-	-	-	-



Motor	i650 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/S4	i650-M0.37/400-3	179	265	159	11
m550-H63/M4	i650-M0.37/400-3	179	265	159	11
m550-H63/L4	i650-M0.55/400-3	179	265	159	11
m550-H71/M4	i650-M0.75/400-3	190	265	159	21
m550-H71/L4	i650-M1.1/400-3	190	265	159	21
m550-P80/M4	i650-M1.5/400-3	203	265	159	25
m550-P90/M4	i650-M2.2/400-3	211	265	159	44
m550-P90/L4	i650-M3.0/400-3	229	265	159	44
m550-P100/M4	i650-M4.0/400-3	239	265	159	34
m550-P100/L4	i650-M5.5/400-3	239	265	159	34
m550-P112/M4	i650-M7.5/400-3	269	359	211	39
m550-P132/M4	i650-M11/400-3	-	-	-	-
m550-P132/L4	i650-M15/400-3	-	-	-	-

Dimensions LB and ΔL ▶ [Basic dimensions](#) 54



8400 motec

Supply voltage 400/480 V

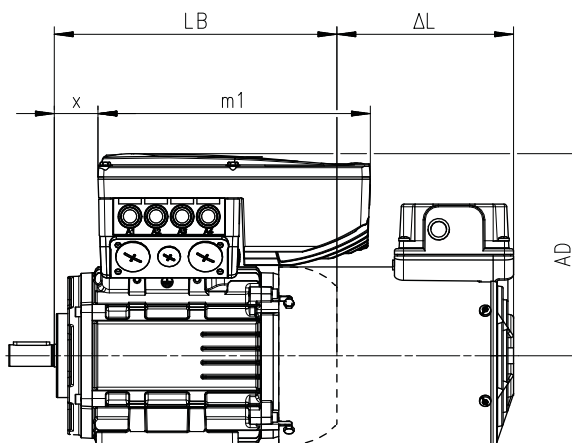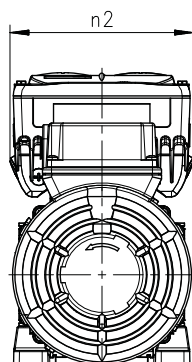

8801070_00

Rated frequency 50/60 Hz

Motor	8400 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/L4	E84DVB□3714S□□□2□	151	240	161	32
m550-H71/M4	E84DVB□3714S□□□2□	172	240	161	41
m550-H71/L4	E84DVB□5514S□□□2□	172	240	161	41
m550-P80/M4	E84DVB□7514S□□□2□	178	240	161	45
m550-P90/M4	E84DVB□1124S□□□2□	186	240	161	64
m550-P90/L4	E84DVB□1524S□□□2□	186	240	161	64
m550-P100/M4	E84DVB□2224S□□□2□	225	260	176	46
m550-P100/L4	E84DVB□3024S□□□2□	225	260	176	46
m550-P112/M4	E84DVB□4024S□□□2□	284	325	195	50
m550-P132/M4	E84DVB□5524S□□□2□	304	325	195	59
m550-P132/L4	E84DVB□7524S□□□2□	304	325	195	59

Rated frequency 87 Hz

Motor	8400 motec	AD	m1	n2	x
		g_1	m_1	n_2	x
		mm	mm	mm	mm
m550-H63/S4	E84DVB□3714S□□□2□	151	240	161	32
m550-H63/M4	E84DVB□3714S□□□2□	151	240	161	32
m550-H63/L4	E84DVB□5514S□□□2□	151	240	161	32
m550-H71/M4	E84DVB□7514S□□□2□	172	240	161	41
m550-H71/L4	E84DVB□1124S□□□2□	172	240	161	41
m550-P80/M4	E84DVB□1524S□□□2□	178	240	161	45
m550-P90/M4	E84DVB□2224S□□□2□	186	260	176	56
m550-P90/L4	E84DVB□3024S□□□2□	186	260	176	56
m550-P100/M4	E84DVB□4024S□□□2□	279	325	195	34
m550-P100/L4	E84DVB□5524S□□□2□	279	325	195	34
m550-P112/M4	E84DVB□7524S□□□2□	284	325	195	50

Dimensions LB and Δ L ▶ [Basic dimensions](#) 54



7.6.3 Additional lengths

Self-ventilated motors

Motor			m550-H		m550-P						
			63/S4	71/M4	80/M4	90/M4	100/M4	112/M4	132/M4	160/M4	180/M4
			63/M4	71/L4		90/L4	100/L4		132/L4	160/L4	180/L4
			63/L4								
Without feedback/brake											
IP54/IP55 protection	Δ L	mm	0	0	0	0	0	0	0	0	0
IP65/IP66 protection	Δ L	mm	23	9	7	7	13	0	9	14	9
With integrated feedback											
IP54/IP55 protection	Δ L	mm	23	9	7	7	13	0	9	14	9
IP65/IP66 protection	Δ L	mm	23	9	7	7	13	0	9	14	9
With mounted feedback											
IP54/IP55 protection	Δ L	mm	85	75	68	63	74	77	91	109	118
IP65/IP66 protection	Δ L	mm	85	75	68	63	74	77	91	109	118
With spring-applied brake											
IP54/IP55 protection	Δ L	mm	61	60	68	63	74	77	91	109	118
IP65/IP66 protection	Δ L	mm	135	128	136	131	145	-	-	-	-
With spring-applied brake and integrated feedback											
IP54/IP55 protection	Δ L	mm	61	60	68	63	74	77	91	109	118
IP65/IP66 protection	Δ L	mm	135	128	136	131	145	-	-	-	-
With spring-applied brake and mounted feedback											
IP54/IP55 protection	Δ L	mm	135	128	136	131	145	148	162	195	195
IP65/IP66 protection	Δ L	mm	135	128	136	131	145	-	-	-	-
With spring-applied double brake											
IP54/IP55 protection	Δ L	mm	-	-	-	-	-	-	-	298	313
With spring-applied double brake and mounted feedback											
IP54/IP55 protection	Δ L	mm	-	-	-	-	-	-	-	298	313

► Protection cover [159](#)

► Second shaft end [161](#)

► Handwheel [162](#)



Forced ventilated motors

Motor			m550-H		m550-P						
			63/S4	71/M4	80/M4	90/M4	100/M4	112/M4	132/M4	160/M4	180/M4
			63/M4	71/L4		90/L4	100/L4		132/L4	160/L4	180/L4
			63/L4								
Without feedback/brake											
IP54/IP55 protection	Δ L	mm	110	102	98	104	105	92	121	158	149
IP65/IP66 protection	Δ L	mm	110	102	98	104	105	92	121	158	149
With integrated feedback											
IP54/IP55 protection	Δ L	mm	110	102	98	104	105	92	121	158	149
IP65/IP66 protection	Δ L	mm	110	102	98	104	105	92	121	158	149
With mounted feedback											
IP54/IP55 protection	Δ L	mm	171	167	156	159	166	169	202	252	257
IP65/IP66 protection	Δ L	mm	171	167	156	159	166	169	202	252	257
With spring-applied brake											
IP54/IP55 protection	Δ L	mm	171	152	156	159	166	169	202	252	257
IP65/IP66 protection	Δ L	mm	217	221	216	227	236	-	-	-	-
With spring-applied brake and integrated feedback											
IP54/IP55 protection	Δ L	mm	171	152	156	159	166	169	202	252	257
IP65/IP66 protection	Δ L	mm	217	221	216	227	236	-	-	-	-
With spring-applied brake and mounted feedback											
IP54/IP55 protection	Δ L	mm	217	221	216	227	236	245	283	343	342
IP65/IP66 protection	Δ L	mm	217	221	216	227	236	-	-	-	-
With spring-applied double brake											
IP54/IP55 protection	Δ L	mm	-	-	-	-	-	-	-	446	460
With spring-applied double brake and mounted feedback											
IP54/IP55 protection	Δ L	mm	-	-	-	-	-	-	-	446	460

► Protection cover 159



7.7 Weights

7.7.1 Basic weights



The basic weights are listed in the rated data.

► [Rated data](#) 40

Observe ► [Additional weights](#) 86!

7.7.2 Additional weights



Add the individual additional weights to the basic weight depending on the design.

Motors

Motor			m550-H		m550-P						
			63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Self-ventilated fan cover											
Prepared for product extension											
Spring-applied brake Feedback 2. Shaft end/hand wheel	m	kg	0.4	0.4	0.5	0.6	0.7	0.8	1.0	1.8	2.0
Spring-applied double brake Spring-applied double brake with feedback	m	kg	-	-	-	-	-	-	-	2.7	3.2
Blower											
Without product extension	m	kg	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.4	1.0
Prepared for product extension											
Spring-applied brake Feedback	m	kg	0.6	0.6	0.7	0.8	0.9	1.0	1.3	1.8	3.3
Spring-applied double brake Spring-applied double brake with feedback	m	kg	-	-	-	-	-	-	-	2.9	4.8
Spring-applied brake											
06	m	kg	1.5	1.5							
08	m	kg		2.2	2.2	2.2					
10	m	kg				3.9	3.9				
12	m	kg					5.6	5.6			
14	m	kg						8.5	8.5		
16	m	kg							13.1	13.1	
18	m	kg								19.1	19.1
20	m	kg									25.7
Brake release lever	m	kg	0.1	0.1	0.2	0.2	0.2	0.4	0.5	0.9	1.4
Spring-applied double brake											
18	m	kg	-	-	-	-	-	-	-	33.2	33.2
20	m	kg	-	-	-	-	-	-	-	-	52.2
Brake release lever	m	kg	-	-	-	-	-	-	-	0.4	0.5
Feedback	m	kg	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5
Protection cover	m	kg	0.2	0.3	0.3	0.4	0.5	0.7	1.3	1.6	2.0
2nd shaft end	m	kg	0.2	0.3	0.3	0.3	0.4	0.4	0.6	-	-
Handwheel	m	kg	0.3	0.7	0.7	0.7	0.8	0.8	1.0	-	-



8 Product extensions


8.1 Motor connection

8.1.1 Connection options




The motor are equipped with a terminal box by default.

Alternatively, different connectors can be selected for fast commissioning or maintenance.



Terminal box with cable gland



Terminal box with M23 connector



Han connector

The three-phase AC motors are intended for operation on constant mains and an inverter.

Mains operation

For mains operation, the motors are available in the following mains voltages:

Mains frequency	Mains voltage	Mains voltage range	Circuit
Hz	V	V	
50	400	380 ... 420	Y
	230	220 ... 240	Δ
60	460	440 ... 480	Y

The motors are rated for the specified mains voltage range.

According to EN 60034-1, the motors operate reliably in continuous operation at $\pm 5\%$ of the line voltage range. This ensures reliable operation in the recommended range $\pm 10\%$ of the IEC standard voltages 230 V, 400 V and 460 V.

Frequency inverter operation

The base frequencies for frequency inverter operation have been set to the following rated voltages:

Rated frequency	Rated voltage	Circuit
Hz	V	
50	400	Y
	230	Δ
87	400	Δ

Product extensions

Motor connection
Connection options




Second ground connection on the motor

According to the EN 61800-5-1 standard, additional measures are required for the protective earth connection if the leakage current is greater than 3.5 mA for alternating current or greater than 10 mA for direct current.

► [Important notes](#) 32

A possible measure is the execution via a second ground connection.

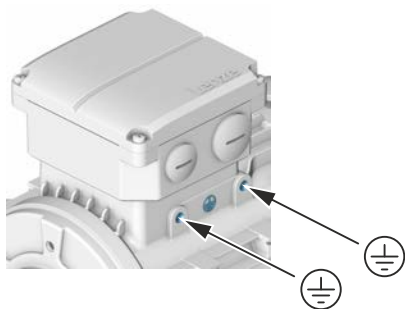

Scope of delivery when a second ground connection is selected:

- Toothed lock washer
- Washer
- Fixing screw



An additional grounding cable is not included in the scope of delivery.

The dimensioning of the grounding is done by the customer.




8.1.2 Assignment of the terminal boxes

Depending on the product extension of the motor, different terminal box sizes (S, M or L) are used.

The M23 and M12 connectors are mounted on the terminal boxes (S,M and L) in the positions described. The connector for the separate fan connection is located on the separate fan terminal box.



When brake monitoring is selected, the motor is always supplied with the L terminal box.

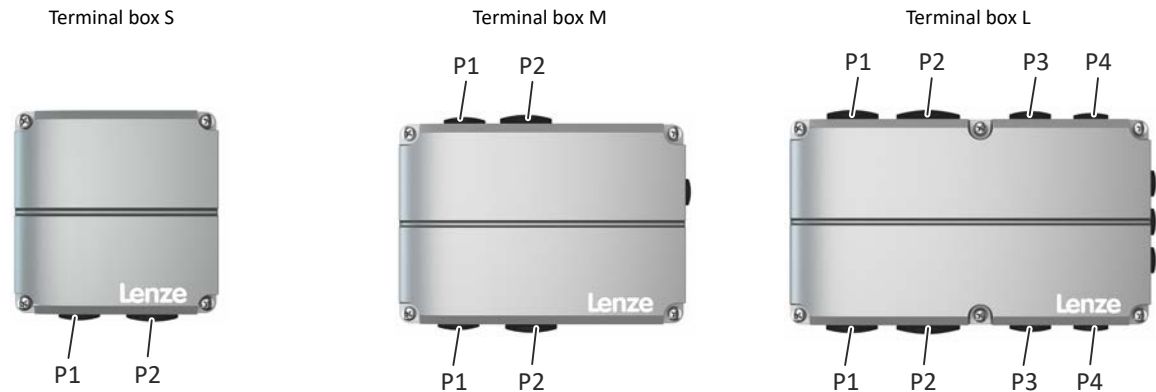

Motor	m550-H		m550-P						
	63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Without product extensions									
Terminal box	S	S	S	S	S	S	L	L	L
Power: M23 connector	P1	P1	P1	P1	P1	P1	P1	-	-
Product extension - brake									
Terminal box	M	M	M	M	M	M	L	L	L
Power + brake: M23 connector	P2	P2	P1	P1	P1	P1	P1	-	-
Product extension - feedback									
Terminal box	M	M	M	M	M	M	L	L	L
Power: M23 connector	P2	P2	P1	P1	P1	P1	P1	-	-
Feedback: M23 connector	P2	P2	P2	P2	P2	P2	P3	P3	P3
Feedback: M12 connector	P1	P1	P2	P2	P2	P2	P4	P4	P4
Product extension - brake + feedback									
Terminal box	L	L	L	L	L	L	L	L	L
Power + brake: M23 connector	P1	P1	P1	P1	P1	P1	P1	-	-
Feedback: M23 connector	P3	P3	P3	P3	P3	P3	P3	P3	P3
Feedback: M12 connector	P4	P4	P4	P4	P4	P4	P4	P4	P4
Product extension - separate fan									
M17 connector	•	•	•	•	•	•	•	•	•

Product extensions

Motor connection
Assignment of the terminal boxes




Connection positions

Positions on the motor terminal box




Positions on the blower terminal box



Terminal box	Positions	Note
Motor terminal box S		
Cable glands	L, E or R	
M23 connector: Power	L, E or R	
Motor terminal box M		
Cable glands	L and R	The feedback connector is on the opposite side to the power connector.
M23 connector: Power/brake Feedback	L or R R or L	
M12 connector: Feedback	R or L	
Motor terminal box L		
Cable glands	L and R	The connectors for power/brake and feedback can be arranged on the same or on the opposite side
M23 connector: Power/brake Feedback	L or R L or R	
M12 connector: Feedback	L or R	
Blower terminal box		
Cable glands	L, E or R	
M23 connector	L, E or R	



Power terminal box "S" dimensions

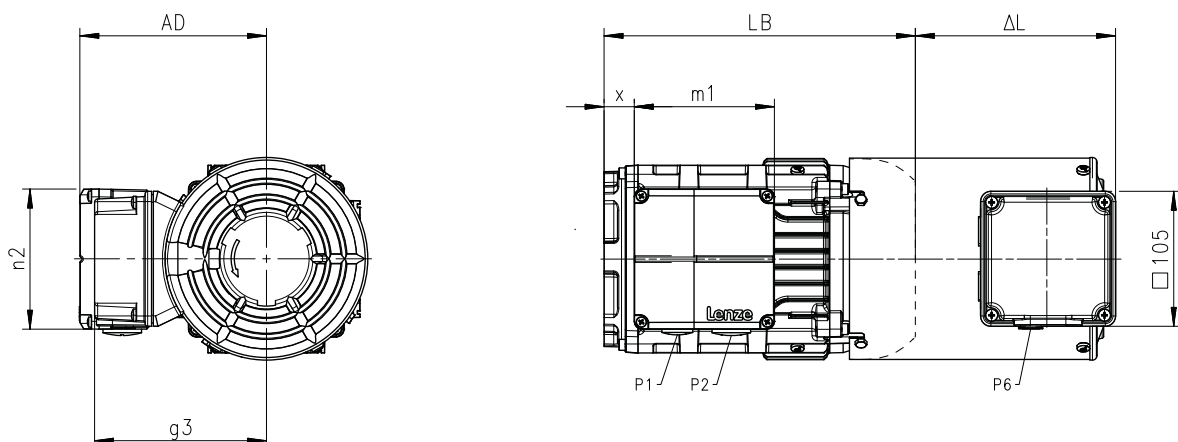

8801072_00

Motor		m550-H		m550-P			
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4
Motor terminal box							
AD	mm	117	128	145	153	163	168
x	mm	22	17	24	30	39	45
m ₁	mm	87	87	109	109	109	109
n ₂	mm	87	87	109	109	109	109
P ₁	mm	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5
P ₂	mm	-	-	M25x1.5	M25x1.5	M25x1.5	M25x1.5
Blower terminal box							
G ₃	mm	118	124	134	143	152	164
P ₆	mm	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5

Dimensions LB ▶ [Basic dimensions](#) 54


Dimensions Δ L ▶ [Additional lengths](#) 84

Product extensions

Motor connection
Assignment of the terminal boxes



Power terminal box "S" dimensions with M23 connector

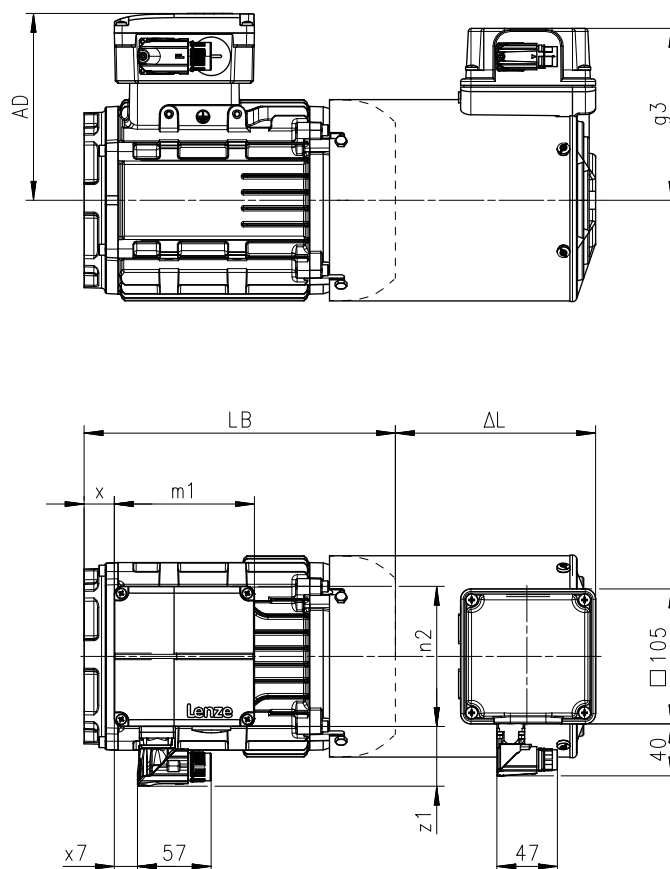

8801075_00


Motor		m550-H		m550-P			
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4
Motor terminal box							
AD	mm	117	128	145	153	163	168
x	mm	22	17	24	30	39	45
m ₁	mm	87	87	109	109	109	109
n ₂	mm	87	87	109	109	109	109
M23 connector							
Power							
x ₇	mm	13	13	18	18	18	18
z ₁	mm	42	42	42	42	42	42
Blower terminal box							
G ₃	mm	118	124	134	143	152	164

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions Δ L ▶ [Additional lengths](#) 84



Power terminal box "M" dimensions

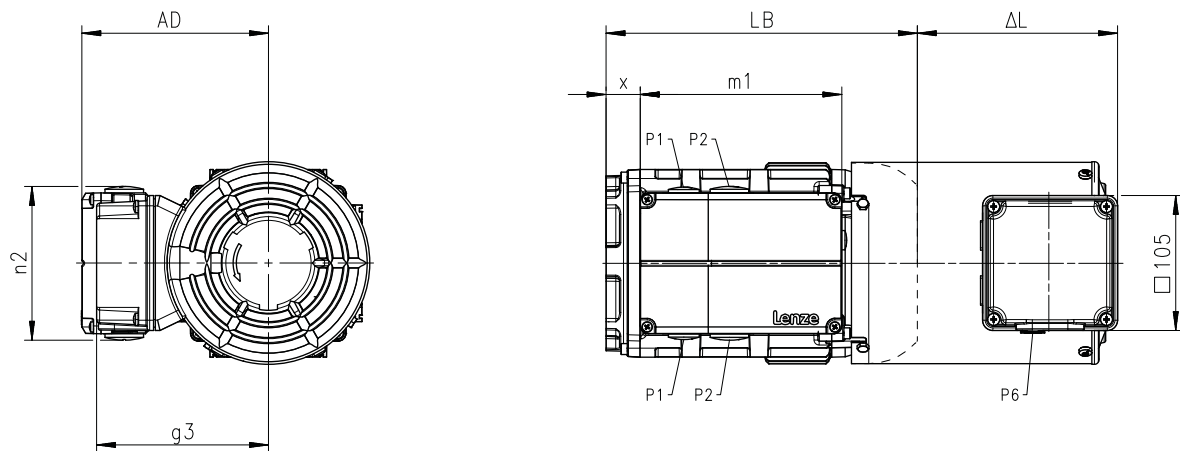

8801073_00

Motor		m550-H		m550-P			
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4
Motor terminal box							
AD	mm	113	124	145	153	163	168
x	mm	21	16	27	34	43	49
m ₁	mm	141	141	157	157	157	157
n ₂	mm	110	110	110	110	110	110
P ₁	mm	M16x1.5	M16x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5
P ₂	mm	M20x1.5	M20x1.5	M25x1.5	M25x1.5	M25x1.5	M25x1.5
Blower terminal box							
G ₃	mm	118	124	134	143	152	164
P ₆	mm	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5

Dimensions LB ► [Basic dimensions](#) 54

Dimensions Δ L ► [Additional lengths](#) 84


Product extensions

Motor connection

Assignment of the terminal boxes



Power terminal box "M" dimensions with M23 connector

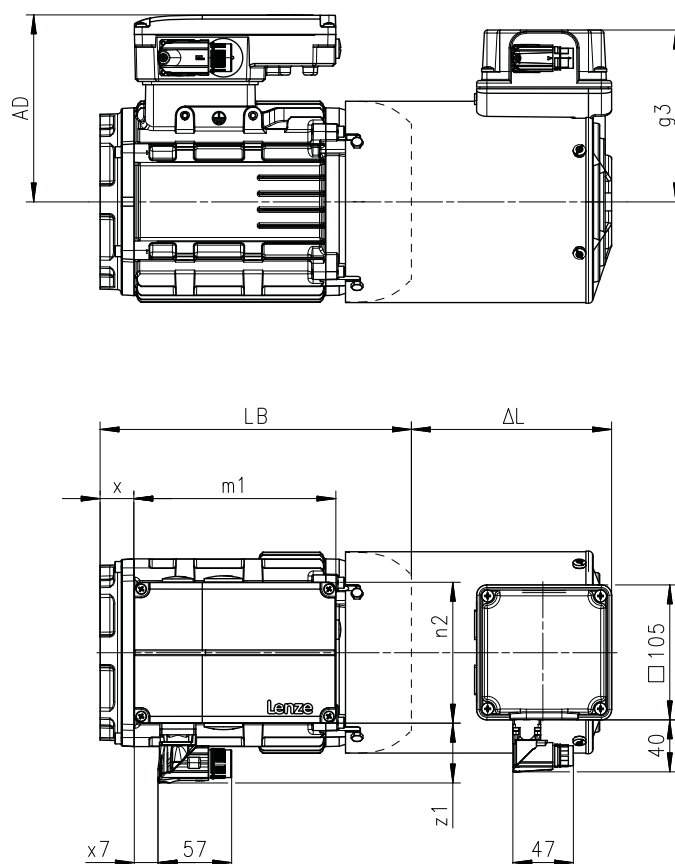

8801076_00

Motor		m550-H		m550-P			
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4
Motor terminal box							
AD	mm	113	124	145	153	163	168
x	mm	21	16	27	34	43	49
m ₁	mm	141	141	157	157	157	157
n ₂	mm	110	110	110	110	110	110
M23 connector Power/brake							
x ₇	mm	45.3	45.3	18	18	18	18
z ₁	mm	42	42	42	42	42	42
M23 connector Feedback							
x ₇	mm	45.3	45.3	53.5	53.5	53.5	53.5
z ₁	mm	42	42	46	46	46	46
Blower terminal box							
G ₃	mm	118	124	134	143	152	164

Dimensions LB ▶ [Basic dimensions](#) 54


Dimensions Δ L ▶ [Additional lengths](#) 84



Product extensions

Motor connection
Assignment of the terminal boxes

Power terminal box "L" dimensions

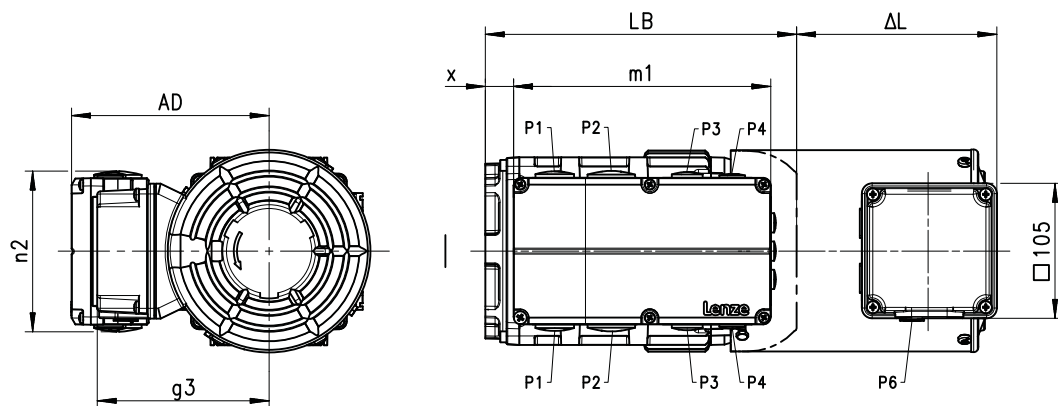

8801074-02

Motor		m550-H		m550-P						
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Motor terminal box										
AD	mm	113	141	154	162	172	177	197	251	271
x	mm	9	4	22	29	39	44	73	111	139
m ₁	mm	141	200	200	200	200	200	200	253	253
n ₂	mm	110	114	114	114	114	114	114	143	143
P ₁	mm	M25x1.5	M25x1.5	M25x1.5	M25x1.5	M25x1.5	M25x1.5	M25x1.5	M50x1.5	M50x1.5
P ₂	mm	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M32x1.5	M40x1.5	M40x1.5
P ₃	mm	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5	M20x1.5
P ₄	mm	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5
Blower terminal box										
G ₃	mm	118	124	134	143	152	164	185	211	211
P ₆	mm	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5	M16x1.5

Dimensions LB ▶ [Basic dimensions](#) 54


Dimensions Δ L ▶ [Additional lengths](#) 84

Product extensions

Motor connection
Assignment of the terminal boxes



Power terminal box "L" dimensions with M23 connector

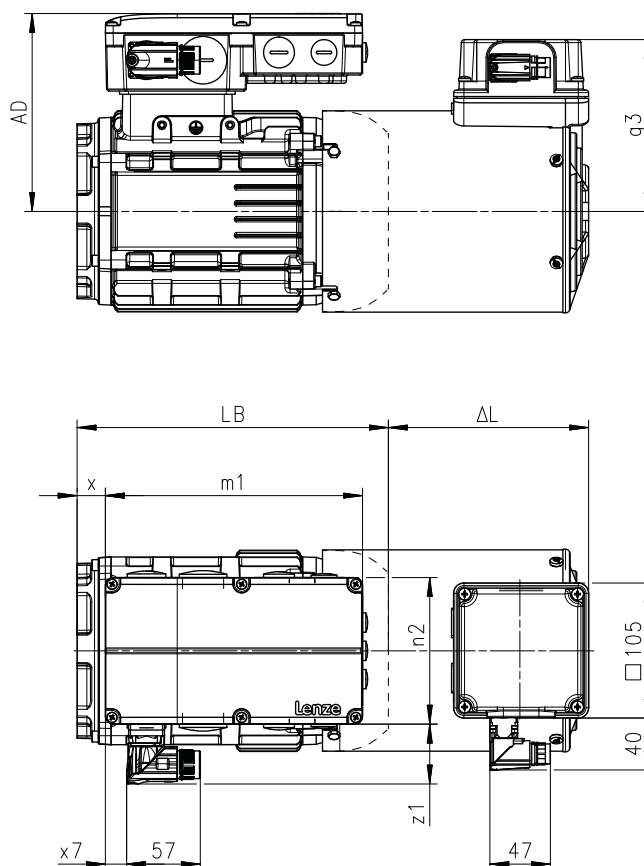

8801077_00

Motor		m550-H		m550-P						
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Motor terminal box										
AD	mm	113	141	154	162	172	177	197	251	271
x	mm	9	4	22	29	39	44	73	111	139
m ₁	mm	141	200	200	200	200	200	200	253	253
n ₂	mm	110	114	114	114	114	114	114	143	143
M23 connector Power/brake										
x ₇	mm	16	16	16	16	16	16	16	-	-
z ₁	mm	46	46	46	46	46	46	46	-	-
M23 connector Feedback										
x ₇	mm	120	120	120	120	120	120	120	168	168
z ₁	mm	42	42	42	42	42	42	42	42	42
Blower terminal box										
g ₃	mm	118	124	134	143	152	164	185	211	211

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions Δ L ▶ [Additional lengths](#) 84



8.1.3 Assignment of the connectors Han

The power, brake and temperature monitoring can be connected in the Han connector.

The designs Han 10E or Han modular with two power modules (16 A or 40 A) are available.



The Han 10E connector is only available for motors with the connection method Y/ Δ .

An additional rectifier can be connected with Han modular.



Feedback in conjunction with the Han plug connector or the integrated i550 motec and 8400 motec is only available with the IG128-24V-H add-on incremental encoder (with 0.5 m cable and M12 plug connector).

Motor	m550-H				m550-P				
	63/S4 63/M4 63/L4	71/M4 71/L4	80/S4 80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
HAN 10E connector									
Connection: • Power • Brake • Temperature monitoring TK0 or PT1000	•	•	•	•	•	•	-	-	-
HAN modular connector									
Connection: • Power • Brake • Temperature monitoring TK0 or PT1000	•	•	•	•	•	•	•	-	-

Positions of the connectors

Positions of the Han connector




Product extensions

Motor connection
Assignment of the connectors Han



Dimensions of Han connector

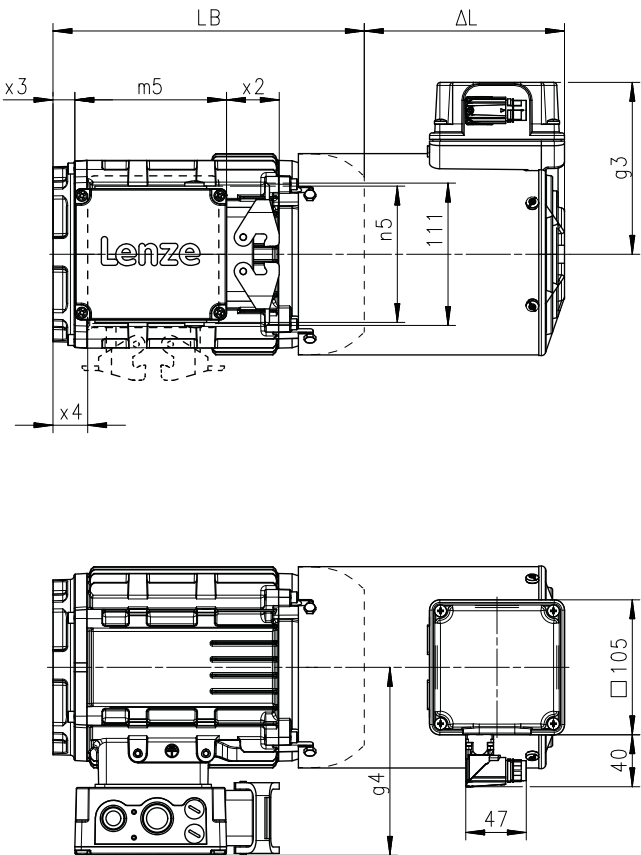

8801078_00

Motor		m550-H		m550-P				
		63/S4 63/M4 63/L4	71/M4 71/L4	80/S4 80/M4 80/L4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4
Han connector								
Power/brake								
G ₄	mm	123	134	147	155	165	170	237
x ₂	mm	41	41	41	41	41	41	47
x ₃	mm	6	1	19	25	34.5	40	39
m ₅	mm	118	118	118	118	118	118	120
x ₄	mm	7	2	20	26	35.5	41	9
n ₅	mm	106	106	106	106	106	106	180
Blower terminal box								
G ₃	mm	118	124	134	143	152	164	185

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions Δ L ▶ [Additional lengths](#) 84



8.1.4 Connection via terminal box

Cable glands




The opening cutouts for the cable glands are closed with plugs.

As the cable glands are only arranged on one side of the motor terminal box "S", the position of the cable glands must be specified.

The motor terminal box "M" and "L" have openings on both sides.

The cable glands on the blower terminal box are only arranged on one side. If required, the terminal box can be rotated step by step by 90 ° after loosening the screws in the terminal box.

Position of the connections

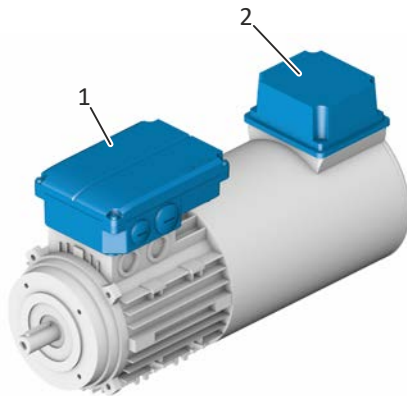

Position	Meaning	Note
1	Power connection Brake connection PE connection Feedback connection Connection of temperature monitoring	For the "S" terminal box, specify the position of the "L", "R" or "E" line connections.
2	Blower connection	When ordering, specify the mounting position of the terminal box: • Shown here: "T" • "L", "R" or "B" If required, the terminal box can be rotated step by step by 90 ° after loosening the screws in the terminal box.

Product extensions


Motor connection
Connection via terminal box



Power connection

Bridge arrangement

Y/Δ circuit

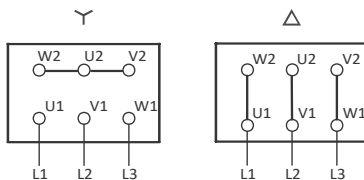


Terminal box, power		
Contact	Name	Meaning
U1	L1	Motor winding phase
V1	L2	
PE	PE	PE conductor
W1	L3	Motor winding phase

DC brake connection

Contact	Name	Meaning
BD1	+	Brake +
BD2	-	Brake -

Connection of brake AC



Connection via rectifiers		
Contact	Name	Meaning
~	L1	Mains
~	N	
+	+	Holding brake (factory-wired)
-	-	
		Switching contact - DC switching

Feedback connection

Resolver		
Contact	Name	Meaning
B1	+Ref	Transformer windings (reference windings)
B2	-Ref	
B3	+VCC ETS	Power supply: electronic nameplate (Only for model with electronic nameplate ETS)
B4	+COS	Cosine stator winding
B5	-COS	
B6	+SIN	Sine stator winding
B7	-SIN	
B8		Not assigned



Product extensions

Motor connection
Connection via terminal box

Incremental encoder HTL/TTL		
Contact	Name	Meaning
+	+ UB	Supply +
-	GND	Mass
A	A/+COS	Track A / + COS
A ⁻	A ⁻ /Ref COS	Track A inverse / - COS
B	B/+SIN	Track B / + SIN
B ⁻	B ⁻ /Ref SIN	Track B inverse/-SIN
0	0	Zero track / + RS485
0 ⁻	0 ⁻	Zero track inverse / - RS485

Incremental encoder SinCos absolute value encoder with Hiperface®		
Contact	Designation	Meaning
B1	+ UB	Supply +
B2	GND	Mass
B3	A	Track A/+COS
B4	A ⁻	Track A inverse/-COS
B5	B	Track B/+SIN
B6	B ⁻	Track B inverse/-SIN
B7	Z	Zero track/+RS485
B8	Z ⁻	Zero track inverse/-RS485
B10		Incremental encoder shield

Connection of temperature monitoring

Contact	Name	Meaning
TB1		Thermal contact TCO
TB2		
1TP1		PTC thermistor 150
1TP2		
2TP1		PTC thermistor 130
2TP2		
R1	+	Thermal detectors PT1000 +
R2	-	Thermal detectors PT1000 -

Blower connection

1-phase			
Contact	Name	Meaning	
PE	PE	PE conductor	
U1	L1	Mains connection	
U2	N		
three-phase			
Contact	Name	Meaning	Note
PE	PE	PE conductor	
U1	L1	Mains connection	Pay attention to the direction of rotation! Swap L1 and L2 if the direction of rotation is incorrect.
V1	L2		
W1	L3		

Product extensions

Motor connection
Connection via connector




8.1.5 Connection via connector



Preassembled Lenze system cables are available for fast and error-free connection of Lenze motors to Lenze inverters.

Details and data can be found in the "Accessories" brochure on the Internet.

Position of the connections

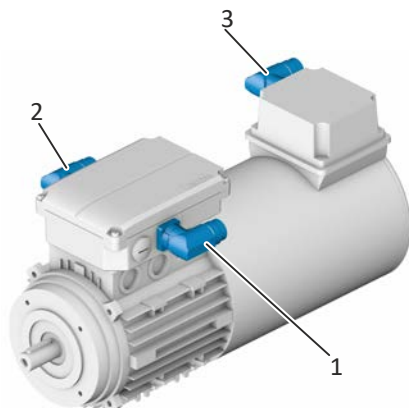

Position	Meaning	Note
1	M23 6-pin connector • Power connection • Brake connection • PE connection	Indicate the mounting position of connectors in the order: • Shown "R" • On the opposite side "L"
	Additionally for M23 8-pin connector: • Thermal contact temperature monitoring connection	Caution: Max. Brake connection voltage ≤ 230 V
2	M23 connector • Feedback connection • PT1000 temperature sensor connection	The mounting position for the feedback connector is on the opposite side to the power connection (position L/R).
3	M17 connector • Blower connection	Indicate the mounting position of terminal boxes in the order: • Shown "T" • L, R or B If required, the terminal box cover can be gradually rotated by 90° after loosening the screws on the terminal box.




Product extensions

Motor connection
Connection via connector

Power and brake connection

ICN-M23 connector assignment


6-pole



M23 6-pole		
Contact	Name	Meaning
1	BD1	DC +/AC brake
2	BD2	DC -/AC brake
4	U	Power phase U
5	V	Power phase V
6	W	Power phase W
PE	PE	PE conductor

M23 connector assignment

8-pole



M23 8-pole		
Contact	Name	Meaning
D	BD2 / BA2	Brake DC-/AC $\leq 230V$
PE	PE	PE conductor
B	TB2	Temperature monitoring: TCO
A	TB1	Temperature monitoring: TCO
C	BD1 / BA1	Brake DC +/AC $\leq 230 V$
1	U	Power phase U
3	W	Power phase W
4	V	Power phase V

Product extensions


Motor connection
Connection via connector



Feedback and temperature monitoring connection

ICN-M23 connector assignment


Resolver



M23 for resolvers		
Contact	Name	Meaning
1	+Ref	Transformer windings
2	-Ref	Transformer windings
3	+VCC ETS	Supply: Electronic nameplate (Only for motors and inverters that support this function)
4	+COS	Cosine stator windings
5	-COS	Cosine stator windings
6	+SIN	Sine stator windings
7	-SIN	Sine stator windings
8		Not assigned
9		Not assigned
10		Not assigned
11	+	Temperature monitoring: PT1000
12	-	Temperature monitoring: PT1000

ICN-M23 connector assignment

Incremental and SinCos absolute value encoder Hiperface®



ICN M23 for encoders		
Contact	Name	Meaning
1	B	Track B / +SIN
2	A ⁻	Track A inverse / -COS
3	A	Track A / + COS
4	+UB	Supply +
5	GND	Mass
6	Z ⁻	Zero track inverse / -RS485
7	Z	Zero track / + RS485
8		Not assigned
9	B ⁻	Track B inverse/-SIN
10		Not assigned
11	+	Temperature monitoring: PT1000
12	-	Temperature monitoring: PT1000




Product extensions

Motor connection
Connection via connector

Blower

Pin assignment ICN-M17



M17 for blowers 1-ph		
Contact	Name	Meaning
1	U1	Fan
2	U2	Fan
3		Not assigned
4		Not assigned
5		Not assigned
6		Not assigned
PE	PE	PE conductor

M17 for blowers 3-ph		
Contact	Name	Meaning
1	U	Power phase U
2		Not assigned
3	V	Power phase V
4		Not assigned
5		Not assigned
6	W	Power phase W
PE	PE	PE conductor


Product extensions

Motor connection
Connection via Han connector



8.1.6 Connection via Han connector

Position of the connections




Position	Meaning
1	Power connection Brake connection PE connection Temperature monitoring connection
	Additionally for the Han-Modular: Rectifier connection

HAN 10E connector

- The motor connection is specified in the counter plug.
The connector is only suitable for motors with the connection method Y/ Δ .

HAN 10E connector assignment

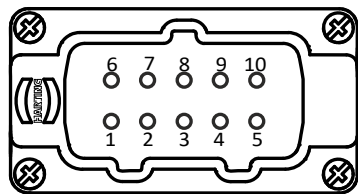

Bridge arrangement in the HAN 10E mating connector		
Contact	Name	Meaning
6-7-8	Y	Connection
1-6	Δ	
2-7		
3-8		

Han 10 E		
Contact	Name	Meaning
1	U1	Motor winding phase
2	V1	
3	W1	
4	+/-AC	Brake
5	-/-AC	
6	W2	Motor winding phase
7	U2	
8	V2	
9	TKO/+PT1000	Temperature monitoring
10	TKO/-PT1000	




Han-Modular connector




The motor circuit is defined in the terminal box.

Han-Modular 16 A connector assignment

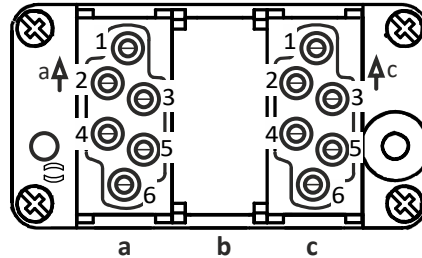

Han-modular 16 A			
Module	Contact	Name	Meaning
a	1	U1	Motor winding phase
	2	V1	
	3	W1	
b			Blank module
c	1	TKO	Temperature monitoring
	2	+/AC	Brake
	3	-/AC	
	4	Schaltkontakt	Rectifier
	5		
	6	TKO	Temperature monitoring

Han-Modular 40 A connector assignment

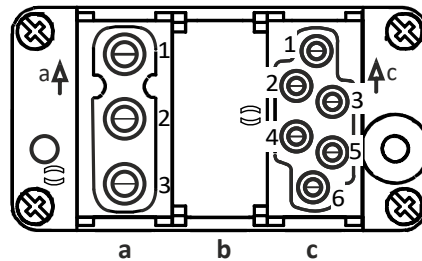

Han-modular 40 A			
Module	Contact	Name	Meaning
a	1	U1	Motor winding phase
	2	V1	
	3	W1	
b			Blank module
c	1	TKO	Temperature monitoring
	2	+/AC	Brake
	3	-/AC	
	4	Schaltkontakt	Rectifier
	5		
	6	TKO	Temperature monitoring

Product extensions


Motor connection
Connection via M12 connector



8.1.7 Connection via M12 connector

M12 pin assignment

Incr. encoder IG128-24V-H



ICN M12		
Contact	Name	Meaning
1	+UB	Supply +
2	B	Track B
3	GND	Mass
4	A	Track A



8.2 Spring-applied brakes

The motors can be ordered with a spring-applied brake to allow stopping or deceleration of the moving masses. The spring-applied brake operates according to the closed-circuit principle. In the deenergized state, the brake is closed. The spring-applied brakes can be used as holding brakes, application brakes or safety brakes.

Overview

The following table shows the possible versions of the spring-applied brakes.

Versions	Holding brake	Application brake		
	Single brake IP54/55	Single brake IP65/66	Single brake IP54/55	Double brake IP54/55
Standard	•	•	•	•
LongLife			•	
Supply voltages				
DC supply				
DC 24 V ±10 %	•	•	•	•
DC 180 V ±10%		•	•	•
DC 205 V ±10%		•	•	•
DC 180 V ... 205 V ±10%	•	•	•	•
AC supply via rectifier in the terminal box				
AC 115 V ±10 %		•	•	•
AC 230 V ±10 %	•	•	•	•
AC 400 V ±10 %		•	•	•
AC 460 V ±10 %		•	•	•
AC 400 V ... 460 V ±10 %	•	•	•	•
Friction lining				
Standard	•	•	•	•
Low-wear		•	•	•
Options				
Manual release	•	•	•	•
UL/CSA-approved	•	•	•	•
Low noise during operation (noise-reduced rotor)	•	•	•	•
Low noise during operation and switching on (noise-reduced rotor and armature plate)		•	•	•
Cover ring	•	•	•	•
Air gap control (from brake size ABR 12)			•	
Wear control (from brake size ABR 12)			•	
Cold-Brake		•	•	•
Overexcitation of brake coil		•	•	•

Control	Without rectifier	Half-wave rectifier	Bridge rectifier	Bridge/half-wave rectifier
		6-pole	6-pole	6-pole
Supply voltages	24 V DC DC 180 V DC 205 V	AC 230 V AC 400 V AC 460 V	AC 230 V	AC 230 V AC 400 V
Approval		UL / CSA		
Options				Holding current lowering Overexcitation



8.2.1 Information on project planning

Important notes

DANGER!

Malfunction of the brake

Even small amounts of oil or grease on the friction surfaces reduce the braking torque considerably.

Possible consequences: Death or severe injuries

► Always keep the friction surfaces free of oil and grease.

Emergency stops

A maximum of 100 emergency stops are possible from $n = 2700$ rpm.



Connection

NOTICE

If used as a service brake, the braking torques are dependent on the motor speed to be braked.

- During braking from a high speed and in the event of emergency stops, the braking torque is significantly reduced.

Connection of the spring-applied brake

The spring-applied brakes can be ordered for connection to AC or DC voltage.

Connection to AC voltage

- A rectifier is required to convert the AC voltage into a DC voltage.
- The rectifier is included in the scope of supply. It is mounted in the terminal box of the motor.
- Available rectifiers:
 - Half-wave rectifier, 6-pole
 - Bridge rectifier, 6-pole
 - Bridge/half-wave rectifier, 6-pole

With the holding current reduction or overexcitation option

Connection to DC voltage

- No rectifier is required.
- A freewheeling diode or a spark suppressor must be used to prevent high induction peaks.

Motor supply cables

If long motor supply cables are used, pay attention to the ohmic voltage drop along the cable and compensate for it with a higher voltage at the input end of the cable.

The following applies to Lenze system cables:

$U[V] = U_B[V] + 0.08 \frac{[V]}{[A] \times [m]} \times I_{Lg}[m] \times I_B[A]$	U	V	Resulting supply voltage
	U_B	V	Rated voltage of the brake
	I_{Lg}	m	Cable length
	I_B	A	Rated current of the brake

AC or DC voltage switching

Brakes can be switched both before the rectifier (AC voltage switching) as well as after the rectifier (DC voltage switching). The choice of control system influences the engagement time of the armature plate, inter alia.

AC switching increases the engagement time by a factor of 5 to 10 compared to DC switching. This is to be observed taken into account when choosing the control system. DC switching is possible by simply removing a bridge and using the switching contact connection. However, this calls for two additional cores in the control cabinet.


DC switching is particularly expedient for lifting applications because a short engagement time is necessary here to guarantee a secure hold without any prior slipping of the load.

Product extensions

Spring-applied brakes
Information on project planning



Permissible friction energy

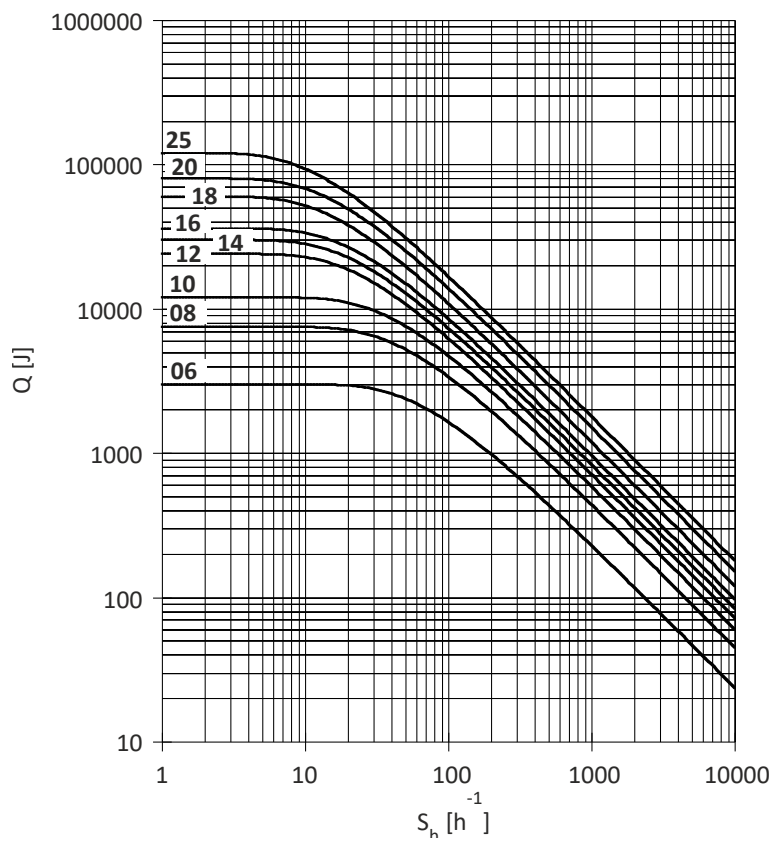

Q Switching energy per switching cycle

S_h Switching rate

06 ... 25 Brake size



Product extensions

Spring-applied brakes
Spring-applied holding brake
Assignment of braking torques

8.2.2 Spring-applied holding brake

The spring-applied brakes are pure holding brakes. Emergency stops are possible.

⚠ DANGER!

An emergency stop during operation can cause the holding brake to malfunction.

Possible consequences: Personal injury and/or damage to property.

- After an emergency stop, check the air gap and the friction lining for damage.
- If the air gap is too large or the friction lining is damaged, replace the brake rotor.

8.2.2.1 Assignment of braking torques

For optimum adaptation of the brake motor to the application, spring-applied brakes with several braking torques are available for each motor frame size.

Motor	Single brake						
	HBR 06	HBR 08	HBR 10	HBR 12	HBR 14	HBR 16	HBR 18
	Nm	Nm	Nm	Nm	Nm	Nm	Nm
m550-H63/S4	4						
m550-H63/M4							
m550-H63/L4							
m550-H71/M4							
m550-H71/L4							
m550-P80/M4		8					
m550-P90/M4							
m550-P90/L4		16					
m550-P100/M4		23					
m550-P100/L4							
m550-P112/M4		32					
m550-P132/M4			60				
m550-P132/L4							
m550-P160/M4			80				
m550-P160/L4							
m550-P180/M4			150				
m550-P180/L4							

8.2.2.2 Rated data

Holding brake		HBR 06	HBR 08	HBR 10	HBR 10	HBR 12	HBR 14	HBR 16	HBR 18
Moment of inertia	kgcm ²	0.128	0.401	2	2	4.5	6.3	15	29
Power input									
DC 24 V	W	20	25	30	30	40	50	55	85
DC 180 V ... 205 V	W	20	25	30	30	40	53	56	85
AC 230 V	W	20	25	30	30	40	53	56	85
AC 400 V ... 460 V	W	20	25	30	30	40	53	56	85
Braking torque is static	Nm	4	8	16	23	32	60	80	150
Min. static braking torque tolerance	%	0	0	0	0	0	0	0	0
Max. static braking torque tolerance	%	80	80	80	80	80	80	80	80
Reversing cycles		1000000	1000000	1000000	1000000	1000000	1000000	1000000	1000000
Repetitive cycles		1000000	1000000	1000000	1000000	1000000	1000000	1000000	1000000
Maximum switching energy	J	3000	7500	12000	12000	24000	30000	36000	60000

Product extensions

Spring-applied brakes
Spring-applied holding brake




Option: Manual release

The brake can be ordered with a manual release lever to facilitate positioning and maintenance work. The brake can be released manually in deenergized mode by actuating the manual release lever.

A lockable manual release lever can be ordered as an option. This is equipped with a clamping device to hold the brake in the released position.

Dimensions of the manual release lever

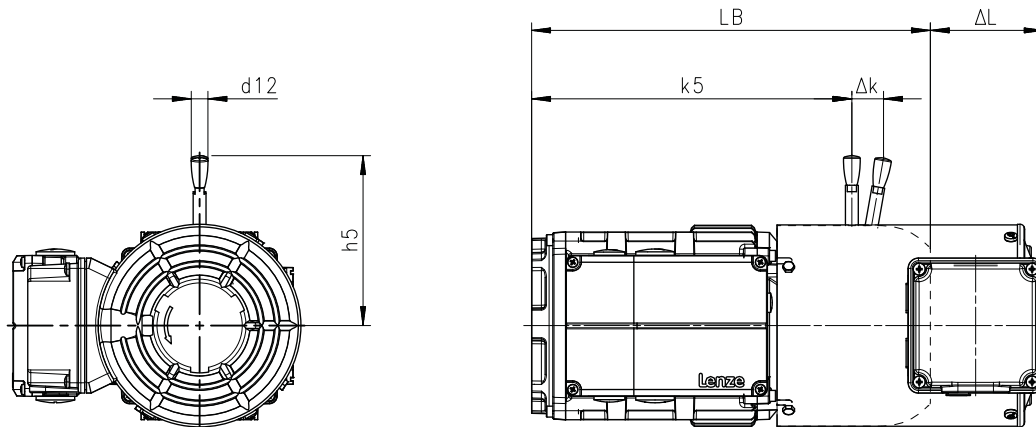

8801081_00

Motor	Brake	Dimensions			
		k_5	Δk	H_5	d_{12}
		mm	mm	mm	mm
m550-H63/S4 m550-H63/M4 m550-H63/L4	HBR 06	193	25	107	13
m550-H71/M4 m550-H71/L4	HBR 06	211	25	107	13
m550-P80/M4	HBR 08	231	27	116	13
m550-P90/M4	HBR 08	270	27	116	13
m550-P90/L4	HBR 10	286	23	131	13
m550-P100/M4 m550-P100/L4	HBR 10	344	23	131	13
m550-P112/M4	HBR 12	345	37	161	13
m550-P132/M4 m550-P132/L4	HBR 14	408	53	229	20
m550-P160/M4	HBR 16	556	67	267	20
m550-P160/L4	HBR 18		100	347	25
m550-P180/M4 m550-P180/L4	HBR 18	627	100	347	25

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions Δ L ▶ [Additional lengths](#) 84



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake
Assignment of braking torques

8.2.3 Spring-applied application brake, IP54/IP55 single brake

The spring-applied brakes can be used as service brakes or holding brakes. Emergency stops are possible.

8.2.3.1 Assignment of braking torques

For optimum adaptation of the brake motor to the application, spring-applied brakes with several braking torques are available for each motor frame size.

Motor	Single brake									
	ABR 06	ABR 08	ABR 10	ABR 12	ABR 14	ABR 16	ABR 18	ABR 20		
	Nm	Nm	Nm	Nm	Nm	Nm	Nm	Nm		
m550-H63/S4	2.5 4									
m550-H63/M4										
m550-H63/L4										
m550-H71/M4										
m550-H71/L4										
m550-P80/M4		3.5 8	16							
m550-P90/M4		8	16 23						32	
m550-P90/L4									46	
m550-P100/M4				14 32	60					
m550-P100/L4				35 60	80 100					
m550-P112/M4					60 80	150				
m550-P132/M4						80 150 200				
m550-P132/L4						80	260			
m550-P160/M4						150	315			
m550-P160/L4										
m550-P180/M4										
m550-P180/L4										

Product extensions

Spring-applied brakes


Spring-applied application brake, IP54/IP55 single brake

Rated data



8.2.3.2 Rated data

Switching times of the spring-applied brakes

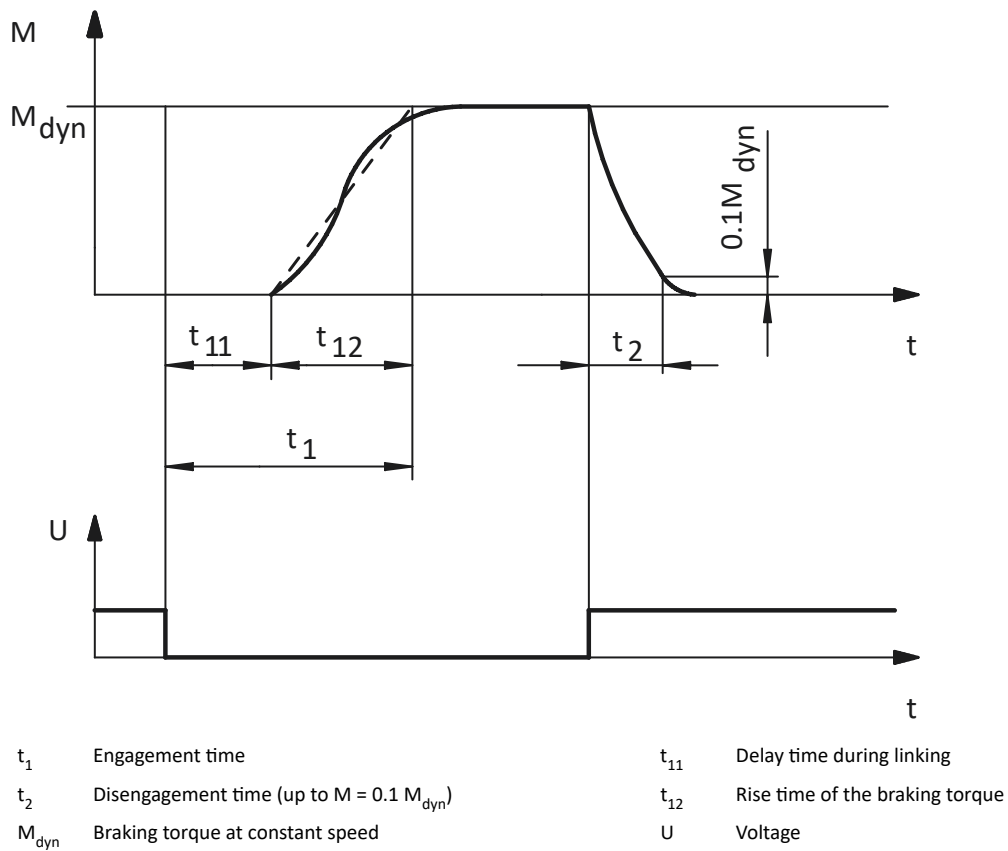



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake
Rated data

Rated data, Single brake, IP54/55

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Power input									
DC 24 V	W	20	20	20	20	25	25	25	25
DC 180 V	W	20	20	20	20	25	25	25	25
DC 205 V	W	20	20	20	20	25	25	25	25
DC 180 V ... 205 V	W	20	20	20	20	25	25	25	25
AC 115 V	W	20	20	20	20	25	25	25	25
AC 230 V	W	20	20	20	20	25	25	25	25
AC 400 V	W	20	20	20	20	25	25	25	25
AC 460 V	W	20	20	20	20	25	25	25	25
AC 400 V ... 460 V	W	20	20	20	20	25	25	25	25
Cold Brake AC 230V	W	20	20	20	20	25	25	25	25
Cold Brake AC 400V	W	23	23	23	23	27	27	27	27
Overexcitation AC 230 V	W	20	20	20	20	25	25	25	25
Overexcitation AC 400 V	W	20	20	20	20	25	25	25	25
Moment of inertia	kgcm ²	0.15	0.15	0.15	0.15	0.61	0.61	0.61	0.61
Braking torque is static	Nm	2.5	2.5	4	4	3.5	3.5	8	8
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35
Dynamic braking torque									
100 rpm	Nm	2.5	2.5	4.0	4.0	3.5	3.5	8.0	8.0
1000 rpm	Nm	2.3	2.3	3.7	3.7	3.1	3.1	7.1	7.1
1200 rpm	Nm	2.3	2.3	3.6	3.6	3.0	3.0	7.0	7.0
1500 rpm	Nm	2.2	2.2	3.5	3.5	3.0	3.0	6.8	6.8
1800 rpm	Nm	2.2	2.2	3.4	3.4	2.9	2.9	6.6	6.6
2500 rpm	Nm	2.1	2.1	3.3	3.3	2.8	2.8	6.4	6.4
3000 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.2	6.2
3600 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.1	6.1
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35
Friction energy									
100 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1200 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1800 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
2500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3600 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
Maximum speed - operation	rpm	6000	3600	6000	3600	5000	3600	5000	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake

Rated data



Rated data, Single brake, IP54/55

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Delay time t11									
DC voltage	ms	25	25	15	15	14	14	15	15
AC mains voltage	ms	25	25	15	15	14	14	15	15
Cold Brake AC 230V	ms	24	24	16	16	22	22	25	25
Cold Brake AC 400V	ms	27	27	19	19	28	28	28	28
Overexcitation AC 230 V	ms	31	31	20	20	33	33	31	31
Overexcitation AC 400 V	ms	31	31	20	20	33	33	31	31
Rise time t12									
DC voltage	ms	13	13	13	13	10	10	16	16
AC mains voltage	ms	13	13	13	13	10	10	16	16
Cold Brake AC 230V	ms	12	12	14	14	16	16	27	27
Cold Brake AC 400V	ms	14	14	16	16	20	20	30	30
Overexcitation AC 230 V	ms	16	16	17	17	24	24	33	33
Overexcitation AC 400 V	ms	16	16	17	17	24	24	33	33
Engagement time t1									
DC voltage	ms	38	38	28	28	24	24	31	31
AC mains voltage	ms	38	38	28	28	24	24	31	31
Cold Brake AC 230V	ms	36	36	30	30	38	38	52	52
Cold Brake AC 400V	ms	41	41	35	35	48	48	58	58
Overexcitation AC 230 V	ms	47	47	37	37	57	57	64	64
Overexcitation AC 400 V	ms	47	47	37	37	57	57	64	64
Disengagement time t2									
DC voltage	ms	30	30	45	45	37	37	57	57
AC mains voltage	ms	30	30	45	45	37	37	57	57
Cold Brake AC 230V	ms	30	30	45	45	37	37	57	57
Cold Brake AC 400V	ms	21	21	30	30	24	24	36	36
Overexcitation AC 230 V	ms	17	17	22	22	18	18	26	26
Overexcitation AC 400 V	ms	17	17	22	22	18	18	26	26
Overexcitation time									
Cold Brake AC 230V	ms	300	300	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300
Friction energy QBW									
DC voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
AC mains voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 230V	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 400V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 230 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 400 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Reversing cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake
Rated data

Rated data, Single brake, IP54/55

Application brake ABR 10, ABR 12

Application brake		ABR 10				ABR 12					
Braking torque											
Standard friction lining	Nm	16		23		14		32		46	
Low-wear friction lining	Nm		16		23		14		32		46
Power input											
DC 24 V	W	30	30	30	30	40	40	40	40	40	40
DC 180 V	W	32	32	32	32	40	40	40	40	40	40
DC 205 V	W	33	33	33	33	40	40	40	40	40	40
DC 180 V ... 205 V	W	33	33	33	33	40	40	40	40	40	40
AC 115 V	W	32	32	32	32	40	40	40	40	40	40
AC 230 V	W	33	33	33	33	40	40	40	40	40	40
AC 400 V	W	32	32	32	32	40	40	40	40	40	40
AC 460 V	W	33	33	33	33	40	40	40	40	40	40
AC 400 V ... 460 V	W	33	33	33	33	40	40	40	40	40	40
Cold Brake AC 230V	W	33	33	33	33	40	40	40	40	40	40
Cold Brake AC 400V	W	30	30	30	30	42	42	42	42	42	42
Overexcitation AC 230 V	W	32	32	32	32	40	40	40	40	40	40
Overexcitation AC 400 V	W	32	32	32	32	40	40	40	40	40	40
Moment of inertia	kgcm ²	2	2	2	2	4.5	4.5	4.5	4.5	4.5	4.5
Braking torque is static	Nm	16	16	23	23	14	14	32	32	46	46
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Dynamic braking torque											
100 rpm	Nm	16	16	23	23	14	14	32	32	46	46
1000 rpm	Nm	14	14	20	20	12	12	28	28	40	40
1200 rpm	Nm	14	14	20	20	12	12	27	27	39	39
1500 rpm	Nm	13	13	19	19	11	11	26	26	38	38
1800 rpm	Nm	13	13	19	19	11	11	26	26	37	37
2500 rpm	Nm	12	12	18	18	11	11	24	24	35	35
3000 rpm	Nm	12	12	17	17	11	11	24	24	35	35
3600 rpm	Nm	12	12	17	17	10	10	23	23	34	34
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Friction energy											
100 rpm	kJ	12	12	12	12	24	24	24	24	24	24
1000 rpm	kJ	12	12	12	12	24	24	24	24	24	24
1200 rpm	kJ	12	12	12	12	24	24	24	24	24	24
1500 rpm	kJ	12	12	12	12	24	24	24	24	24	24
1800 rpm	kJ	12	12	12	12	24	24	24	24	24	24
2500 rpm	kJ	12	12	12	12	24	24	24	24	24	24
3000 rpm	kJ	12	12	12	12	24	24	24	24	24	24
3600 rpm	kJ	12	12	12	12	24	7	24	7	24	7
Maximum speed - operation	rpm	4000	3600	4000	3600	3600	3600	3600	3600	3600	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake

Rated data



Rated data, Single brake, IP54/55

Application brake ABR 10, ABR 12

Application brake		ABR 10				ABR 12					
Braking torque											
Standard friction lining	Nm	16		23		14		32		46	
Low-wear friction lining	Nm		16		23		14		32		46
Delay time t11											
DC voltage	ms	28	28	10	10	21	21	28	28	16	16
AC mains voltage	ms	28	28	10	10	21	21	28	28	16	16
Cold Brake AC 230V	ms	31	31	24	24	49	49	48	48	27	27
Cold Brake AC 400V	ms	34	34	27	27	64	64	55	55	42	42
Overexcitation AC 230 V	ms	44	44	29	29	73	73	62	62	54	54
Overexcitation AC 400 V	ms	44	44	29	29	73	73	62	62	54	54
Rise time t12											
DC voltage	ms	19	19	19	19	19	19	25	25	25	25
AC mains voltage	ms	19	19	19	19	19	19	25	25	25	25
Cold Brake AC 230V	ms	21	21	46	46	44	44	43	43	42	42
Cold Brake AC 400V	ms	23	23	51	51	58	58	49	49	66	66
Overexcitation AC 230 V	ms	30	30	55	55	66	66	55	55	84	84
Overexcitation AC 400 V	ms	30	30	55	55	66	66	55	55	84	84
Engagement time t1											
DC voltage	ms	47	47	29	29	40	40	53	53	41	41
AC mains voltage	ms	47	47	29	29	40	40	53	53	41	41
Cold Brake AC 230V	ms	52	52	70	70	93	93	91	91	69	69
Cold Brake AC 400V	ms	57	57	78	78	122	122	104	104	108	108
Overexcitation AC 230 V	ms	74	74	84	84	139	139	117	117	138	138
Overexcitation AC 400 V	ms	74	74	84	84	139	139	117	117	138	138
Disengagement time t2											
DC voltage	ms	76	76	109	109	65	65	115	115	193	193
AC mains voltage	ms	76	76	109	109	65	65	115	115	193	193
Cold Brake AC 230V	ms	76	76	109	109	65	65	115	115	193	193
Cold Brake AC 400V	ms	53	53	72	72	48	48	78	78	114	114
Overexcitation AC 230 V	ms	41	41	53	53	38	38	59	59	81	81
Overexcitation AC 400 V	ms	41	41	53	53	38	38	59	59	81	81
Overexcitation time											
Cold Brake AC 230V	ms	300	300	300	300	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300	300	300
Friction energy QBW											
DC voltage	MJ	98	264	50.3	198	236.4	706.2	177.3	529.6	75.7	353.1
AC mains voltage	MJ	98	264	50.3	198	236.4	706.2	177.3	529.6	75.7	353.1
Cold Brake AC 230V	MJ	98	264	50.3	198	236.4	706.2	177.3	529.6	75.7	353.1
Cold Brake AC 400V	MJ	98	264	67.1	264	236.4	706.2	236.4	706.2	151.4	706.2
Overexcitation AC 230 V	MJ	98	264	67.1	264	236.4	706.2	236.4	706.2	151.4	706.2
Overexcitation AC 400 V	MJ	98	264	67.1	264	236.4	706.2	236.4	706.2	151.4	706.2
Reversing cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake
Rated data

Rated data, Single brake, IP54/55

Application brake ABR 14, ABR 16

Application brake		ABR 14				ABR 16					
Braking torque											
Standard friction lining	Nm	35		60		60		80		100	
Low-wear friction lining	Nm		35		60		60		80		100
Power input											
DC 24 V	W	50	50	50	50	55	55	55	55	55	55
DC 180 V	W	53	53	53	53	55	55	55	55	55	55
DC 205 V	W	53	53	53	53	56	56	56	56	56	56
DC 180 V ... 205 V	W	53	53	53	53	56	56	56	56	56	56
AC 115 V	W	53	53	53	53	56	56	56	56	56	56
AC 230 V	W	53	53	53	53	56	56	56	56	56	56
AC 400 V	W	53	53	53	53	55	55	55	55	55	55
AC 460 V	W	53	53	53	53	56	56	56	56	56	56
AC 400 V ... 460 V	W	53	53	53	53	56	56	56	56	56	56
Cold Brake AC 230V	W	53	53	53	53	56	56	56	56	56	56
Cold Brake AC 400V	W	54	54	54	54	55	55	55	55	55	55
Overexcitation AC 230 V	W	53	53	53	53	56	56	56	56	56	56
Overexcitation AC 400 V	W	53	53	53	53	55	55	55	55	55	55
Moment of inertia	kgcm ²	6.3	6.3	6.3	6.3	15	15	15	15	15	15
Braking torque is static	Nm	35	35	60	60	60	60	80	80	100	100
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Dynamic braking torque											
100 rpm	Nm	35	35	60	60	60	60	80	80	100	100
1000 rpm	Nm	30	30	51	51	50	50	66	66	83	83
1200 rpm	Nm	29	29	50	50	49	49	65	65	81	81
1500 rpm	Nm	28	28	49	49	47	47	63	62	78	78
1800 rpm	Nm	28	28	47	47	46	46	62	62	77	77
2500 rpm	Nm	26	26	45	45	44	44	58	58	73	73
3000 rpm	Nm	26	26	44	44	43	43	57	57	71	71
3600 rpm	Nm	25	-	43	-	42	-	56	-	70	-
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Friction energy											
100 rpm	kJ	30	30	30	30	36	36	36	36	36	36
1000 rpm	kJ	30	30	30	30	36	36	36	36	36	36
1200 rpm	kJ	30	30	30	30	36	36	36	36	36	36
1500 rpm	kJ	30	30	30	30	36	36	36	36	36	36
1800 rpm	kJ	30	30	30	30	36	36	36	36	36	36
2500 rpm	kJ	30	30	30	30	36	36	36	36	36	36
3000 rpm	kJ	30	18	30	18	36	11	36	11	36	11
3600 rpm	kJ	30	-	30	-	36	-	36	-	36	-
Maximum speed - operation	rpm	3600	3000	3600	3000	3600	3000	3600	3000	3600	3000
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake

Rated data



Rated data, Single brake, IP54/55

Application brake ABR 14, ABR 16

Application brake		ABR 14				ABR 16					
Braking torque											
Standard friction lining	Nm	35		60		60		80		100	
Low-wear friction lining	Nm		35		60		60		80		100
Delay time t11											
DC voltage	ms	37	37	17	17	53	53	27	27	22	22
AC mains voltage	ms	37	37	17	17	53	53	27	27	22	22
Cold Brake AC 230V	ms	61	61	33	33	114	114	58	58	41	41
Cold Brake AC 400V	ms	69	69	43	43	133	133	74	74	56	56
Overexcitation AC 230 V	ms	76	76	47	47	145	145	89	89	70	70
Overexcitation AC 400 V	ms	76	76	47	47	145	145	89	89	70	70
Rise time t12											
DC voltage	ms	22	22	25	25	30	30	30	30	30	30
AC mains voltage	ms	22	22	25	25	30	30	30	30	30	30
Cold Brake AC 230V	ms	36	36	47	47	65	65	64	64	56	56
Cold Brake AC 400V	ms	41	41	63	63	75	75	82	82	76	76
Overexcitation AC 230 V	ms	45	45	69	69	82	82	99	99	95	95
Overexcitation AC 400 V	ms	45	45	69	69	82	82	99	99	95	95
Engagement time t1											
DC voltage	ms	59	59	42	42	83	83	57	57	52	52
AC mains voltage	ms	59	59	42	42	83	83	57	57	52	52
Cold Brake AC 230V	ms	97	97	80	80	179	179	122	122	97	97
Cold Brake AC 400V	ms	110	110	106	106	208	208	156	156	132	132
Overexcitation AC 230 V	ms	121	121	116	116	227	227	188	188	165	165
Overexcitation AC 400 V	ms	121	121	116	116	227	227	188	188	165	165
Disengagement time t2											
DC voltage	ms	148	148	210	210	169	169	220	220	297	297
AC mains voltage	ms	148	148	210	210	169	169	220	220	297	297
Cold Brake AC 230V	ms	148	148	210	210	169	169	220	220	297	297
Cold Brake AC 400V	ms	98	98	131	131	125	125	154	154	191	191
Overexcitation AC 230 V	ms	71	71	92	92	100	100	119	119	141	141
Overexcitation AC 400 V	ms	71	71	92	92	100	100	119	119	141	141
Overexcitation time											
Cold Brake AC 230V	ms	300	300	300	300	1300	1300	1300	1300	1300	1300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300	300	300
Friction energy QBW											
DC voltage	MJ	238.2	761.4	178.7	571	257.9	965.7	257.9	965.7	120.5	643.8
AC mains voltage	MJ	238.2	761.4	178.7	571	257.9	965.7	257.9	965.7	120.5	643.8
Cold Brake AC 230V	MJ	238.2	761.4	178.7	571	257.9	965.7	257.9	965.7	120.5	643.8
Cold Brake AC 400V	MJ	238.2	761.4	238.2	761.4	257.9	965.7	257.9	965.7	180.8	965.7
Overexcitation AC 230 V	MJ	238.2	761.4	238.2	761.4	257.9	965.7	257.9	965.7	180.8	965.7
Overexcitation AC 400 V	MJ	238.2	761.4	238.2	761.4	257.9	965.7	257.9	965.7	180.8	965.7
Reversing cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake
Rated data

Rated data, Single brake, IP54/55

Application brake ABR 18, ABR 20

Application brake		ABR 18						ABR 20			
Braking torque											
Standard friction lining	Nm	80		150		200		260		315	
Low-wear friction lining	Nm		80		150		200		260		315
Power input											
DC 24 V	W	85	85	85	85	85	85	100	100	100	100
DC 180 V	W	85	85	85	85	85	85	100	100	100	100
DC 205 V	W	85	85	85	85	85	85	100	100	100	100
DC 180 V ... 205 V	W	85	85	85	85	85	85	100	100	100	100
AC 115 V	W	85	85	85	85	85	85	100	100	100	100
AC 230 V	W	85	85	85	85	85	85	100	100	100	100
AC 400 V	W	85	85	85	85	85	85	100	100	100	100
AC 460 V	W	85	85	85	85	85	85	100	100	100	100
AC 400 V ... 460 V	W	85	85	85	85	85	85	100	100	100	100
Cold Brake AC 230V	W	85	85	85	85	85	85	100	100	100	100
Cold Brake AC 400V	W	85	85	85	85	85	85	100	100	100	100
Overexcitation AC 230 V	W	85	85	85	85	85	85	100	100	100	100
Overexcitation AC 400 V	W	85	85	85	85	85	85	100	100	100	100
Moment of inertia	kgcm ²	29	29	29	29	29	29	73	73	73	73
Braking torque is static	Nm	80	80	150	150	200	200	260	260	315	315
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Dynamic braking torque											
100 rpm	Nm	80	80	150	150	200	200	260	260	315	315
1000 rpm	Nm	65	65	122	122	162	162	205	205	249	249
1200 rpm	Nm	63	63	119	119	158	158	200	200	243	243
1500 rpm	Nm	62	62	116	116	154	154	195	195	236	236
1800 rpm	Nm	60	60	113	113	150	150	190	-	230	-
2500 rpm	Nm	58	-	108	-	144	-	182	-	221	-
3000 rpm	Nm	56	-	105	-	140	-	177	-	214	-
3600 rpm	Nm	54	-	102	-	136	-	172	-	208	-
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Friction energy											
100 rpm	kJ	60	60	60	60	60	60	80	80	80	80
1000 rpm	kJ	60	60	60	60	60	60	80	80	80	80
1200 rpm	kJ	60	60	60	60	60	60	80	80	80	80
1500 rpm	kJ	60	60	60	60	60	60	80	24	80	24
1800 rpm	kJ	60	36	60	36	60	36	80	-	80	-
2500 rpm	kJ	60	-	60	-	60	-	80	-	80	-
3000 rpm	kJ	60	-	60	-	60	-	80	-	80	-
3600 rpm	kJ	60	-	60	-	60	-	80	-	80	-
Maximum speed - operation	rpm	3600	1800	3600	1800	3600	1800	3600	1500	3600	1500
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake

Rated data



Rated data, Single brake, IP54/55

Application brake ABR 18, ABR 20

Application brake		ABR 18						ABR 20			
Braking torque											
Standard friction lining	Nm	80		150		200		260		315	
Low-wear friction lining	Nm		80		150		200		260		315
Delay time t11											
DC voltage	ms	77	77	33	33	24	24	65	65	46	46
AC mains voltage	ms	77	77	33	33	24	24	65	65	46	46
Cold Brake AC 230V	ms	145	145	80	80	60	60	102	102	69	69
Cold Brake AC 400V	ms	160	160	93	93	72	72	121	121	88	88
Overexcitation AC 230 V	ms	174	174	108	108	86	86	133	133	103	103
Overexcitation AC 400 V	ms	174	174	108	108	86	86	133	133	103	103
Rise time t12											
DC voltage	ms	20	20	45	45	45	45	100	100	100	100
AC mains voltage	ms	20	20	45	45	45	45	100	100	100	100
Cold Brake AC 230V	ms	38	38	109	109	113	113	157	157	150	150
Cold Brake AC 400V	ms	42	42	127	127	135	135	186	186	191	191
Overexcitation AC 230 V	ms	45	45	147	147	161	161	205	205	224	224
Overexcitation AC 400 V	ms	45	45	147	147	161	161	205	205	224	224
Engagement time t1											
DC voltage	ms	97	97	78	78	69	69	165	165	146	146
AC mains voltage	ms	97	97	78	78	69	69	165	165	146	146
Cold Brake AC 230V	ms	183	183	189	189	173	173	259	259	219	219
Cold Brake AC 400V	ms	202	202	220	220	207	207	307	307	279	279
Overexcitation AC 230 V	ms	219	219	255	255	247	247	338	338	327	327
Overexcitation AC 400 V	ms	219	219	255	255	247	247	338	338	327	327
Disengagement time t2											
DC voltage	ms	179	179	270	270	356	356	340	340	378	378
AC mains voltage	ms	179	179	270	270	356	356	340	340	378	378
Cold Brake AC 230V	ms	179	179	270	270	356	356	340	340	378	378
Cold Brake AC 400V	ms	129	129	179	179	215	215	218	218	229	229
Overexcitation AC 230 V	ms	101	101	132	132	151	151	157	157	160	160
Overexcitation AC 400 V	ms	101	101	132	132	151	151	157	157	160	160
Overexcitation time											
Cold Brake AC 230V	ms	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300	300	300
Friction energy QBW											
DC voltage	MJ	358.2	1542.1	358.2	1542.1	81.9	578.3	474.7	2322.1	246.6	1741.6
AC mains voltage	MJ	358.2	1542.1	358.2	1542.1	81.9	578.3	474.7	2322.1	246.6	1741.6
Cold Brake AC 230V	MJ	358.2	1542.1	358.2	1542.1	81.9	578.3	474.7	2322.1	246.6	1741.6
Cold Brake AC 400V	MJ	358.2	1542.1	358.2	1542.1	218.3	1542.1	474.7	2322.1	328.8	2322.1
Overexcitation AC 230 V	MJ	358.2	1542.1	358.2	1542.1	218.3	1542.1	474.7	2322.1	328.8	2322.1
Overexcitation AC 400 V	MJ	358.2	1542.1	358.2	1542.1	218.3	1542.1	474.7	2322.1	328.8	2322.1
Reversing cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶



Option: Friction lining

Friction linings are available for the application brake in standard or low-wear versions.

Standard friction lining

- Can be used as a holding brake or service brake in highly dynamic applications
- Short run-in process
- Wide speed range

Low-wear friction lining

- Can be used as a holding brake or service brake in applications with low but frequent loads of approx. 5 ... 10 % Q_E
- Short run-in process
- Higher friction work until the brake is replaced
- Lower maximum speed during operation

Option: Reduction of the holding current (cold brake)

By reducing the holding current, the bridge/half-wave rectifier reduces the power consumption of the open brake. As the brake heats up less, this control is referred to as a "Cold Brake". This is necessary at low speeds in order to counteract impermissible heating. This means that no blower is required even with a speed setting range below 14 Hz. In addition, only a quarter of the braking power is required, thus saving energy.

Option: Short-time overexcitation of the brake coil

The disengagement time can be reduced by triggering the brake coil with twice the rated voltage for an overexcitation time. The brake releases much faster and the wear on the friction lining decreases. As a result of these features, this control variant is particularly ideal for hoist applications.

Option: Brake monitoring

The application brake is optionally available with a microswitch to monitor the air gap or wear. It is connected in the motor terminal box.

Wear control

A microswitch monitors the wear at the friction lining. If the wear limit is exceeded, the microswitch opens, the motor contactor is not triggered and the motor does not start.

Monitoring of the air gap

A microswitch monitors the air gap between the armature plate and the stator.

If the microswitch is activated, it e.g. triggers a motor contactor and the motor starts up.

If the brake is switched off, the microswitch opens, the motor contactor is not triggered and the motor does not start up.

This is used for machines and aggregates that require a precisely defined start-up and brake reaction and for the error monitoring of defective rectifiers, broken connecting cables, defective coils, and an excessively large air gap.

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake




Option: Manual release

The brake can be ordered with a manual release lever to facilitate positioning and maintenance work. The brake can be released manually in deenergized mode by actuating the manual release lever.

A lockable manual release lever can be ordered as an option. This is equipped with a clamping device to hold the brake in the released position.

Dimensions of the manual release lever

Standard design, degree of protection IP54/55

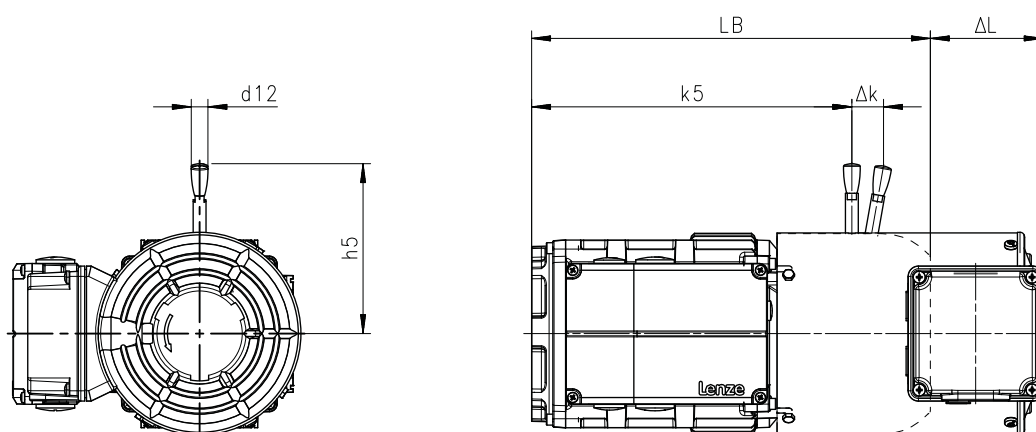

8801081_00

Motor	Brake	Dimensions			
		k_5	Δk	H_5	d_{12}
		mm	mm	mm	mm
m550-H63/S4 m550-H63/M4 m550-H63/L4	ABR 06	193	25	107	13
m550-H71/M4 m550-H71/L4	ABR 06	211	25	107	13
	ABR 08	212	27	116	13
m550-P80/M4	ABR 08	231	27	116	13
	ABR 10	242	30	132	13
m550-P90/M4 m550-P90/L4	ABR 08	270	27	116	13
	ABR 10	281	30	132	13
m550-P100/M4 m550-P100/L4	ABR 10	346	30	132	13
	ABR 12	348	37	161	13
m550-P112/M4	ABR 12	345	37	161	13
	ABR 14	350	45	195	24
m550-P132/M4 m550-P132/L4	ABR 14	416	45	195	24
	ABR 16	419	55	240	24
m550-P160/M4	ABR 16	551	55	240	24
	ABR 18	565	64	279	24
m550-P160/L4	ABR 18	565	64	279	24
m550-P180/M4 m550-P180/L4	ABR 18	626	64	279	24
	ABR 20	632	74	319	24

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions ΔL ▶ [Additional lengths](#) 84



Product extensions

Spring-applied brakes
Spring-applied application brake, IP65/IP66 single brake
Assignment of braking torques

8.2.4 Spring-applied application brake, IP65/IP66 single brake

The spring-applied brakes with increased protection class can be used as service brakes or holding brakes. Emergency stops are possible.

8.2.4.1 Assignment of braking torques

For optimum adaptation of the brake motor to the application, spring-applied brakes with several braking torques are available for each motor frame size.

Motor	Single brake				
	ABR 06	ABR 08	ABR 10	ABR 12	
	Nm	Nm	Nm	Nm	
m550-H63/S4	2.5 4				
m550-H63/M4					
m550-H63/L4					
m550-H71/M4		8			
m550-H71/L4					
m550-P80/M4		3.5	16		
m550-P90/M4		8			
m550-P90/L4		8			
m550-P100/M4			16 23		32
m550-P100/L4					46

Product extensions

Spring-applied brakes


Spring-applied application brake, IP65/IP66 single brake

Rated data



8.2.4.2 Rated data

Switching times of the spring-applied brakes

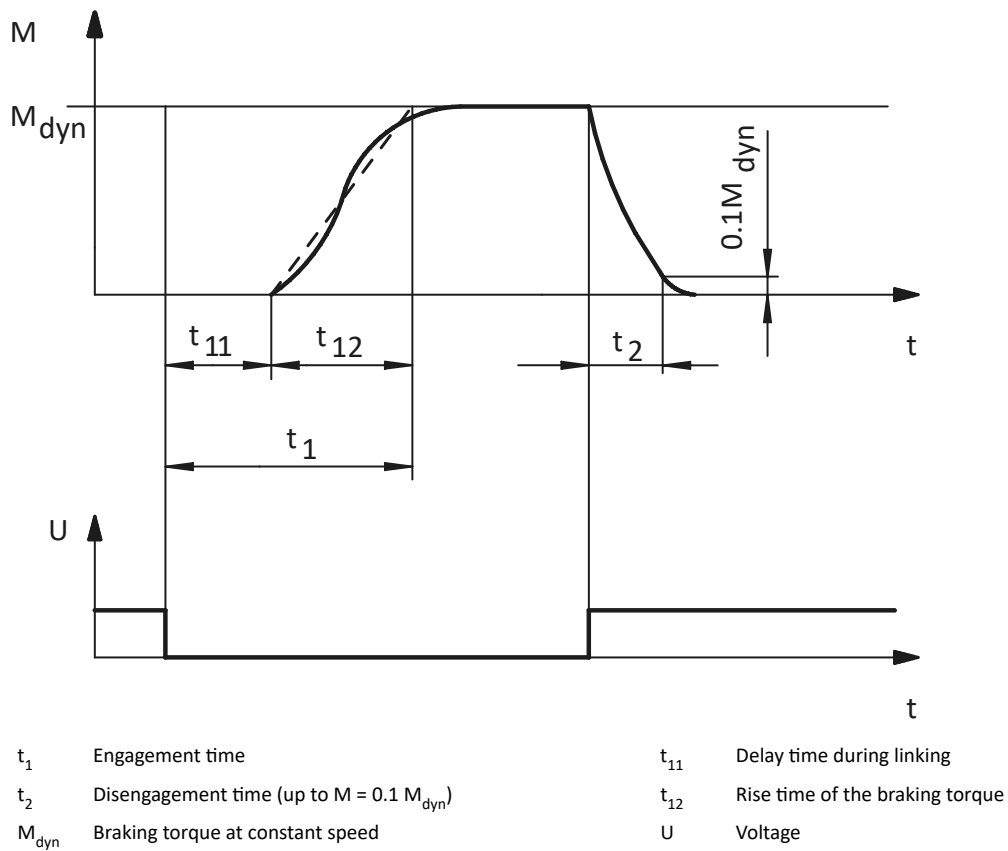



Product extensions

Spring-applied brakes
Spring-applied application brake, IP65/IP66 single brake
Rated data

Rated data, Single brake, IP65/66

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Power input									
DC 24 V	W	20	20	20	20	25	25	25	25
DC 180 V	W	20	20	20	20	25	25	25	25
DC 205 V	W	20	20	20	20	25	25	25	25
DC 180 V ... 205 V	W	20	20	20	20	25	25	25	25
AC 115 V	W	20	20	20	20	25	25	25	25
AC 230 V	W	20	20	20	20	25	25	25	25
AC 400 V	W	20	20	20	20	25	25	25	25
AC 460 V	W	20	20	20	20	25	25	25	25
AC 400 V ... 460 V	W	20	20	20	20	25	25	25	25
Cold Brake AC 230V	W	20	20	20	20	25	25	25	25
Cold Brake AC 400V	W	23	23	23	23	27	27	27	27
Overexcitation AC 230 V	W	20	20	20	20	25	25	25	25
Overexcitation AC 400 V	W	20	20	20	20	25	25	25	25
Moment of inertia	kgcm ²	0.15	0.15	0.15	0.15	0.61	0.61	0.61	0.61
Braking torque is static	Nm	2.5	2.5	4	4	3.5	3.5	8	8
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35
Dynamic braking torque									
100 rpm	Nm	2.5	2.5	4.0	4.0	3.5	3.5	8.0	8.0
1000 rpm	Nm	2.3	2.3	3.7	3.7	3.1	3.1	7.1	7.1
1200 rpm	Nm	2.3	2.3	3.6	3.6	3.0	3.0	7.0	7.0
1500 rpm	Nm	2.2	2.2	3.5	3.5	3.0	3.0	6.8	6.8
1800 rpm	Nm	2.2	2.2	3.4	3.4	2.9	2.9	6.6	6.6
2500 rpm	Nm	2.1	2.1	3.3	3.3	2.8	2.8	6.4	6.4
3000 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.2	6.2
3600 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.1	6.1
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35
Friction energy									
100 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1200 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1800 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
2500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3600 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
Maximum speed - operation	rpm	6000	3600	6000	3600	5000	3600	5000	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP65/IP66 single brake

Rated data



Rated data, Single brake, IP65/66

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Delay time t11									
DC voltage	ms	24	24	16	16	38	38	30	30
AC mains voltage	ms	24	24	16	16	38	38	30	30
Cold Brake AC 230V	ms	26	26	17	17	41	41	32	32
Cold Brake AC 400V	ms	28	28	18	18	44	44	34	34
Overexcitation AC 230 V	ms	29	29	19	19	46	46	36	36
Overexcitation AC 400 V	ms	29	29	19	19	46	46	36	36
Rise time t12									
DC voltage	ms	34	34	25	25	46	46	26	26
AC mains voltage	ms	34	34	25	25	46	46	26	26
Cold Brake AC 230V	ms	43	43	31	31	58	58	33	33
Cold Brake AC 400V	ms	43	43	31	31	58	58	33	33
Overexcitation AC 230 V	ms	43	43	31	31	58	58	33	33
Overexcitation AC 400 V	ms	43	43	31	31	58	58	33	33
Engagement time t1									
DC voltage	ms	58	58	41	41	84	84	56	56
AC mains voltage	ms	58	58	41	41	84	84	56	56
Cold Brake AC 230V	ms	69	69	48	48	99	99	65	65
Cold Brake AC 400V	ms	71	71	49	49	102	102	67	67
Overexcitation AC 230 V	ms	72	72	50	50	104	104	69	69
Overexcitation AC 400 V	ms	72	72	50	50	104	104	69	69
Disengagement time t2									
DC voltage	ms	30	30	32	32	32	32	52	52
AC mains voltage	ms	30	30	32	32	32	32	52	52
Cold Brake AC 230V	ms	30	30	32	32	32	32	52	52
Cold Brake AC 400V	ms	20	20	21	21	21	21	35	35
Overexcitation AC 230 V	ms	15	15	16	16	16	16	26	26
Overexcitation AC 400 V	ms	15	15	16	16	16	16	26	26
Overexcitation time									
Cold Brake AC 230V	ms	300	300	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300
Friction energy QBW									
DC voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
AC mains voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 230V	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 400V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 230 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 400 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Reversing cycles		2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶
Repetitive cycles		2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶



Product extensions

Spring-applied brakes
Spring-applied application brake, IP65/IP66 single brake
Rated data

Rated data, Single brake, IP65/66

Application brake ABR 10, ABR 12

Application brake		ABR 10				ABR 12			
Braking torque									
Standard friction lining	Nm	16		23		32		46	
Low-wear friction lining	Nm		16		23		32		46
Power input									
DC 24 V	W	30	30	30	30	40	40	40	40
DC 180 V	W	32	32	32	32	40	40	40	40
DC 205 V	W	33	33	33	33	40	40	40	40
DC 180 V ... 205 V	W	33	33	33	33	40	40	40	40
AC 115 V	W	32	32	32	32	40	40	40	40
AC 230 V	W	33	33	33	33	40	40	40	40
AC 400 V	W	32	32	32	32	40	40	40	40
AC 460 V	W	33	33	33	33	40	40	40	40
AC 400 V ... 460 V	W	33	33	33	33	40	40	40	40
Cold Brake AC 230V	W	33	33	33	33	40	40	40	40
Cold Brake AC 400V	W	30	30	30	30	42	42	42	42
Overexcitation AC 230 V	W	32	32	32	32	40	40	40	40
Overexcitation AC 400 V	W	32	32	32	32	40	40	40	40
Moment of inertia	kgcm ²	2	2	2	2	4.5	4.5	4.5	4.5
Braking torque is static	Nm	16	16	23	23	32	32	46	46
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35
Dynamic braking torque									
100 rpm	Nm	16	16	23	23	32	32	46	46
1000 rpm	Nm	14	14	20	20	28	28	40	40
1200 rpm	Nm	14	14	20	20	27	27	39	39
1500 rpm	Nm	13	13	19	19	26	26	38	38
1800 rpm	Nm	13	13	19	19	26	26	37	37
2500 rpm	Nm	12	12	18	18	24	24	35	35
3000 rpm	Nm	12	12	17	17	24	24	35	35
3600 rpm	Nm	12	12	17	17	23	23	34	34
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35
Friction energy									
100 rpm	kJ	12	12	12	12	24	24	24	24
1000 rpm	kJ	12	12	12	12	24	24	24	24
1200 rpm	kJ	12	12	12	12	24	24	24	24
1500 rpm	kJ	12	12	12	12	24	24	24	24
1800 rpm	kJ	12	12	12	12	24	24	24	24
2500 rpm	kJ	12	12	12	12	24	24	24	24
3000 rpm	kJ	12	12	12	12	24	24	24	24
3600 rpm	kJ	12	12	12	12	24	7	24	7
Maximum speed - operation	rpm	4000	3600	4000	3600	3600	3600	3600	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP65/IP66 single brake

Rated data



Rated data, Single brake, IP65/66

Application brake ABR 10, ABR 12

Application brake		ABR 10				ABR 12			
Braking torque									
Standard friction lining	Nm	16		23		32		46	
Low-wear friction lining	Nm		16		23		32		46
Delay time t11									
DC voltage	ms	40	40	23	23	47	47	65	65
AC mains voltage	ms	40	40	23	23	47	47	65	65
Cold Brake AC 230V	ms	43	43	25	25	50	50	70	70
Cold Brake AC 400V	ms	46	46	27	27	53	53	74	74
Overexcitation AC 230 V	ms	48	48	28	28	56	56	78	78
Overexcitation AC 400 V	ms	48	48	28	28	56	56	78	78
Rise time t12									
DC voltage	ms	46	46	46	46	34	34	34	34
AC mains voltage	ms	46	46	46	46	34	34	34	34
Cold Brake AC 230V	ms	58	58	58	58	43	43	43	43
Cold Brake AC 400V	ms	58	58	58	58	43	43	43	43
Overexcitation AC 230 V	ms	58	58	58	58	43	43	43	43
Overexcitation AC 400 V	ms	58	58	58	58	43	43	43	43
Engagement time t1									
DC voltage	ms	86	86	69	69	81	81	99	99
AC mains voltage	ms	86	86	69	69	81	81	99	99
Cold Brake AC 230V	ms	101	101	83	83	93	93	113	113
Cold Brake AC 400V	ms	104	104	85	85	96	96	117	117
Overexcitation AC 230 V	ms	106	106	86	86	99	99	121	121
Overexcitation AC 400 V	ms	106	106	86	86	99	99	121	121
Disengagement time t2									
DC voltage	ms	107	107	154	154	121	121	135	135
AC mains voltage	ms	107	107	154	154	121	121	135	135
Cold Brake AC 230V	ms	107	107	154	154	121	121	135	135
Cold Brake AC 400V	ms	71	71	103	103	81	81	90	90
Overexcitation AC 230 V	ms	54	54	77	77	61	61	68	68
Overexcitation AC 400 V	ms	54	54	77	77	61	61	68	68
Overexcitation time									
Cold Brake AC 230V	ms	300	300	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300
Friction energy QBW									
DC voltage	MJ	73.5	198	30.7	121	118.2	353.1	64.1	298.8
AC mains voltage	MJ	73.5	198	30.7	121	118.2	353.1	64.1	298.8
Cold Brake AC 230V	MJ	73.5	198	30.7	121	118.2	353.1	64.1	298.8
Cold Brake AC 400V	MJ	98	264	62.9	247.5	216.7	647.3	134	624.7
Overexcitation AC 230 V	MJ	98	264	67.1	264	216.7	647.3	138.8	647.3
Overexcitation AC 400 V	MJ	98	264	67.1	264	216.7	647.3	138.8	647.3
Reversing cycles		2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶
Repetitive cycles		2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶	2x 10 ⁶



Product extensions


Spring-applied brakes
Spring-applied application brake, IP65/IP66 single brake

Option: Manual release

The brake can be ordered with a manual release lever to facilitate positioning and maintenance work. The brake can be released manually in deenergized mode by actuating the manual release lever.

A lockable manual release lever can be ordered as an option. This is equipped with a clamping device to hold the brake in the released position.

Standard design, degree of protection IP65/66

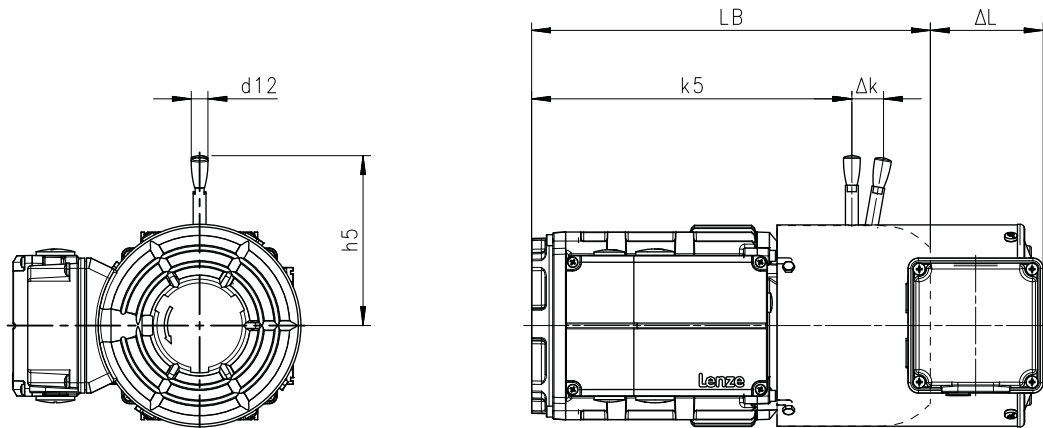

8801081_00

Motor	Brake	Dimensions			
		k_5	Δk	H_5	d_{12}
		mm	mm	mm	mm
m550-H63/S4 m550-H63/M4 m550-H63/L4	ABR 06	200	22	112	8
m550-H71/M4 m550-H71/L4	ABR 06	218	22	112	8
	ABR 08	223	23	120	8
m550-P80/M4	ABR 08	242	23	120	8
	ABR 10	244	20	143	10
m550-P90/M4 m550-P90/L4	ABR 08	281	23	120	8
	ABR 10	283	20	143	10
m550-P100/M4 m550-P100/L4	ABR 10	348	25	143	10
	ABR 12	352	34	175	12

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions ΔL ▶ [Additional lengths](#) 84

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake LongLife

Assignment of braking torques



8.2.5 Spring-applied application brake, IP54/IP55 single brake LongLife

The spring-applied brakes can be used as service brakes or holding brakes. Emergency stops are possible.

The spring-applied brake is available as a LongLife version for applications with very high switching frequencies.

The brake mechanism is reinforced. Up to 10 million repetitive or 15 million reversing switching cycles are possible.

8.2.5.1 Assignment of braking torques


For optimum adaptation of the brake motor to the application, spring-applied brakes with several braking torques are available for each motor frame size.

Motor	Single brake LongLife				
	ABR 06	ABR 08	ABR 10	ABR 12	
	Nm	Nm	Nm	Nm	
m550-H63/S4	2.5 4				
m550-H63/M4					
m550-H63/L4					
m550-H71/M4					
m550-H71/L4					
m550-P80/M4		3.5	16		
m550-P90/M4		8			
m550-P90/L4		8			
m550-P100/M4					32
m550-P100/L4					
m550-P112/M4				14 32	



8.2.5.2 Rated data

Switching times of the spring-applied brakes

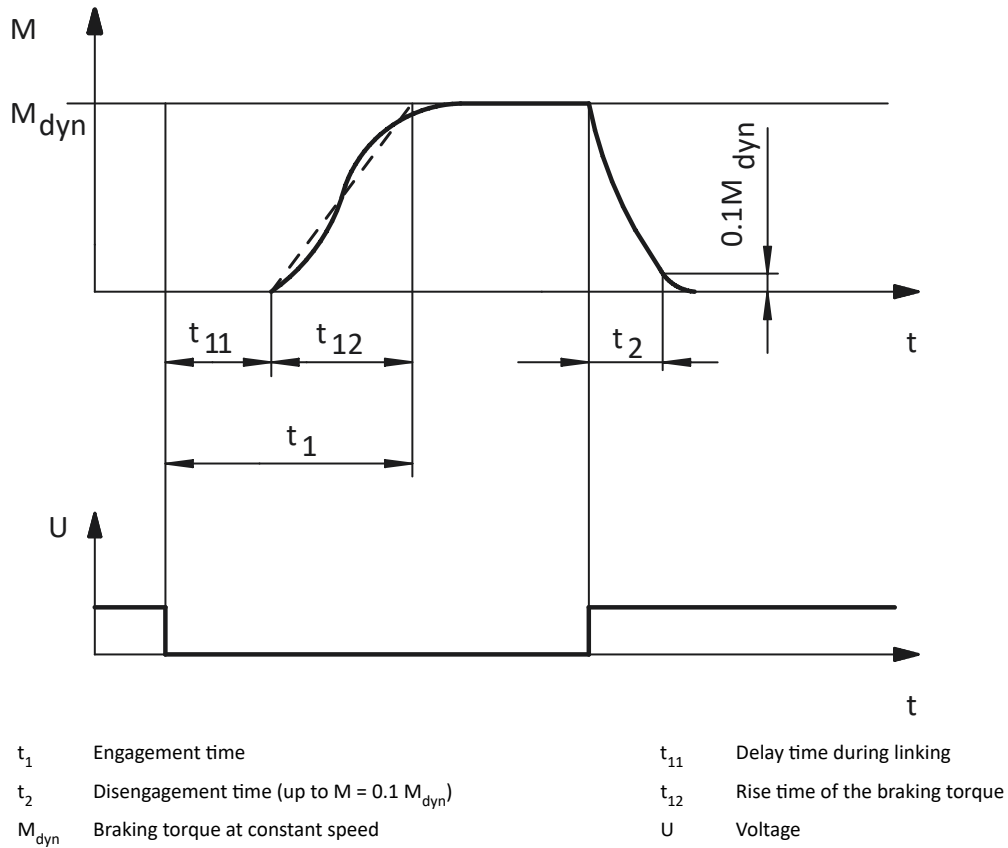

Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake LongLife
Rated data



Rated data, Single brake LongLife, IP54/55

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Power input									
DC 24 V	W	20	20	20	20	25	25	25	25
DC 180 V	W	20	20	20	20	25	25	25	25
DC 205 V	W	20	20	20	20	25	25	25	25
DC 180 V ... 205 V	W	20	20	20	20	25	25	25	25
AC 115 V	W	20	20	20	20	25	25	25	25
AC 230 V	W	20	20	20	20	25	25	25	25
AC 400 V	W	20	20	20	20	25	25	25	25
AC 460 V	W	20	20	20	20	25	25	25	25
AC 400 V ... 460 V	W	20	20	20	20	25	25	25	25
Cold Brake AC 230V	W	20	20	20	20	25	25	25	25
Cold Brake AC 400V	W	23	23	23	23	27	27	27	27
Overexcitation AC 230 V	W	20	20	20	20	25	25	25	25
Overexcitation AC 400 V	W	20	20	20	20	25	25	25	25
Moment of inertia	kgcm ²	0.15	0.15	0.15	0.15	0.61	0.61	0.61	0.61
Braking torque is static	Nm	2.5	2.5	4	4	3.5	3.5	8	8
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35
Dynamic braking torque									
100 rpm	Nm	2.5	2.5	4.0	4.0	3.5	3.5	8.0	8.0
1000 rpm	Nm	2.3	2.3	3.7	3.7	3.1	3.1	7.1	7.1
1200 rpm	Nm	2.3	2.3	3.6	3.6	3.0	3.0	7.0	7.0
1500 rpm	Nm	2.2	2.2	3.5	3.5	3.0	3.0	6.8	6.8
1800 rpm	Nm	2.2	2.2	3.4	3.4	2.9	2.9	6.6	6.6
2500 rpm	Nm	2.1	2.1	3.3	3.3	2.8	2.8	6.4	6.4
3000 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.2	6.2
3600 rpm	Nm	2.0	2.0	3.2	3.2	2.7	2.7	6.1	6.1
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35
Friction energy									
100 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1200 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
1800 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
2500 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3000 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
3600 rpm	kJ	3	3	3	3	7.5	7.5	7.5	7.5
Maximum speed - operation	rpm	6000	3600	6000	3600	5000	3600	5000	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake LongLife
Rated data

Rated data, Single brake LongLife, IP54/55

Application brake ABR 06, ABR 08

Application brake		ABR 06				ABR 08			
Braking torque									
Standard friction lining	Nm	2.5		4		3.5		8	
Low-wear friction lining	Nm		2.5		4		3.5		8
Delay time t11									
DC voltage	ms	25	25	15	15	14	14	15	15
AC mains voltage	ms	25	25	15	15	14	14	15	15
Cold Brake AC 230V	ms	24	24	16	16	22	22	25	25
Cold Brake AC 400V	ms	27	27	19	19	28	28	28	28
Overexcitation AC 230 V	ms	31	31	20	20	33	33	31	31
Overexcitation AC 400 V	ms	31	31	20	20	33	33	31	31
Rise time t12									
DC voltage	ms	13	13	13	13	10	10	16	16
AC mains voltage	ms	13	13	13	13	10	10	16	16
Cold Brake AC 230V	ms	12	12	14	14	16	16	27	27
Cold Brake AC 400V	ms	14	14	16	16	20	20	30	30
Overexcitation AC 230 V	ms	16	16	17	17	24	24	33	33
Overexcitation AC 400 V	ms	16	16	17	17	24	24	33	33
Engagement time t1									
DC voltage	ms	38	38	28	28	24	24	31	31
AC mains voltage	ms	38	38	28	28	24	24	31	31
Cold Brake AC 230V	ms	36	36	30	30	38	38	52	52
Cold Brake AC 400V	ms	41	41	35	35	48	48	58	58
Overexcitation AC 230 V	ms	47	47	37	37	57	57	64	64
Overexcitation AC 400 V	ms	47	47	37	37	57	57	64	64
Disengagement time t2									
DC voltage	ms	30	30	45	45	37	37	57	57
AC mains voltage	ms	30	30	45	45	37	37	57	57
Cold Brake AC 230V	ms	30	30	45	45	37	37	57	57
Cold Brake AC 400V	ms	21	21	30	30	24	24	36	36
Overexcitation AC 230 V	ms	17	17	22	22	18	18	26	26
Overexcitation AC 400 V	ms	17	17	22	22	18	18	26	26
Overexcitation time									
Cold Brake AC 230V	ms	300	300	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300
Friction energy QBW									
DC voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
AC mains voltage	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 230V	MJ	56.5	113.1	42.4	84.8	92.1	210.4	69.1	157.8
Cold Brake AC 400V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 230 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Overexcitation AC 400 V	MJ	56.5	113.1	56.5	113.1	92.1	210.4	92.1	210.4
Reversing cycles		15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶
Repetitive cycles		10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶

Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake LongLife
Rated data



Rated data, Single brake LongLife, IP54/55

Application brake ABR 10, ABR 12

Application brake		ABR 10		ABR 12			
Braking torque							
Standard friction lining	Nm	16		14		32	
Low-wear friction lining	Nm		16		14		32
Power input							
DC 24 V	W	30	30	40	40	40	40
DC 180 V	W	32	32	40	40	40	40
DC 205 V	W	33	33	40	40	40	40
DC 180 V ... 205 V	W	33	33	40	40	40	40
AC 115 V	W	32	32	40	40	40	40
AC 230 V	W	33	33	40	40	40	40
AC 400 V	W	32	32	40	40	40	40
AC 460 V	W	33	33	40	40	40	40
AC 400 V ... 460 V	W	33	33	40	40	40	40
Cold Brake AC 230V	W	33	33	40	40	40	40
Cold Brake AC 400V	W	30	30	42	42	42	42
Overexcitation AC 230 V	W	32	32	40	40	40	40
Overexcitation AC 400 V	W	32	32	40	40	40	40
Moment of inertia	kgcm ²	2	2	4.5	4.5	4.5	4.5
Braking torque is static	Nm	16	16	14	14	32	32
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35
Dynamic braking torque							
100 rpm	Nm	16	16	14	14	32	32
1000 rpm	Nm	14	14	12	12	28	28
1200 rpm	Nm	14	14	12	12	27	27
1500 rpm	Nm	13	13	11	11	26	26
1800 rpm	Nm	13	13	11	11	26	26
2500 rpm	Nm	12	12	11	11	24	24
3000 rpm	Nm	12	12	11	11	24	24
3600 rpm	Nm	12	12	10	10	23	23
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35
Friction energy							
100 rpm	kJ	12	12	24	24	24	24
1000 rpm	kJ	12	12	24	24	24	24
1200 rpm	kJ	12	12	24	24	24	24
1500 rpm	kJ	12	12	24	24	24	24
1800 rpm	kJ	12	12	24	24	24	24
2500 rpm	kJ	12	12	24	24	24	24
3000 rpm	kJ	12	12	24	24	24	24
3600 rpm	kJ	12	12	24	7	24	7
Maximum speed - operation	rpm	4000	3600	3600	3600	3600	3600
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 single brake LongLife
Rated data

Rated data, Single brake LongLife, IP54/55

Application brake ABR 10, ABR 12

Application brake		ABR 10		ABR 12			
Braking torque							
Standard friction lining	Nm	16		14		32	
Low-wear friction lining	Nm		16		14		32
Delay time t11							
DC voltage	ms	28	28	21	21	28	28
AC mains voltage	ms	28	28	21	21	28	28
Cold Brake AC 230V	ms	31	31	49	49	48	48
Cold Brake AC 400V	ms	34	34	64	64	55	55
Overexcitation AC 230 V	ms	44	44	73	73	62	62
Overexcitation AC 400 V	ms	44	44	73	73	62	62
Rise time t12							
DC voltage	ms	19	19	19	19	25	25
AC mains voltage	ms	19	19	19	19	25	25
Cold Brake AC 230V	ms	21	21	44	44	43	43
Cold Brake AC 400V	ms	23	23	58	58	49	49
Overexcitation AC 230 V	ms	30	30	66	66	55	55
Overexcitation AC 400 V	ms	30	30	66	66	55	55
Engagement time t1							
DC voltage	ms	47	47	40	40	53	53
AC mains voltage	ms	47	47	40	40	53	53
Cold Brake AC 230V	ms	52	52	93	93	91	91
Cold Brake AC 400V	ms	57	57	122	122	104	104
Overexcitation AC 230 V	ms	74	74	139	139	117	117
Overexcitation AC 400 V	ms	74	74	139	139	117	117
Disengagement time t2							
DC voltage	ms	76	76	65	65	115	115
AC mains voltage	ms	76	76	65	65	115	115
Cold Brake AC 230V	ms	76	76	65	65	115	115
Cold Brake AC 400V	ms	53	53	48	48	78	78
Overexcitation AC 230 V	ms	41	41	38	38	59	59
Overexcitation AC 400 V	ms	41	41	38	38	59	59
Overexcitation time							
Cold Brake AC 230V	ms	300	300	300	300	300	300
Cold Brake AC 400V	ms	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300
Friction energy QBW							
DC voltage	MJ	98	264	236.4	706.2	177.3	529.6
AC mains voltage	MJ	98	264	236.4	706.2	177.3	529.6
Cold Brake AC 230V	MJ	98	264	236.4	706.2	177.3	529.6
Cold Brake AC 400V	MJ	98	264	236.4	706.2	236.4	706.2
Overexcitation AC 230 V	MJ	98	264	236.4	706.2	236.4	706.2
Overexcitation AC 400 V	MJ	98	264	236.4	706.2	236.4	706.2
Reversing cycles		15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶	15x 10 ⁶
Repetitive cycles		10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶	10x 10 ⁶

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 single brake LongLife




Option: Manual release

The brake can be ordered with a manual release lever to facilitate positioning and maintenance work. The brake can be released manually in deenergized mode by actuating the manual release lever.

A lockable manual release lever can be ordered as an option. This is equipped with a clamping device to hold the brake in the released position.

Longlife design, degree of protection IP54/55

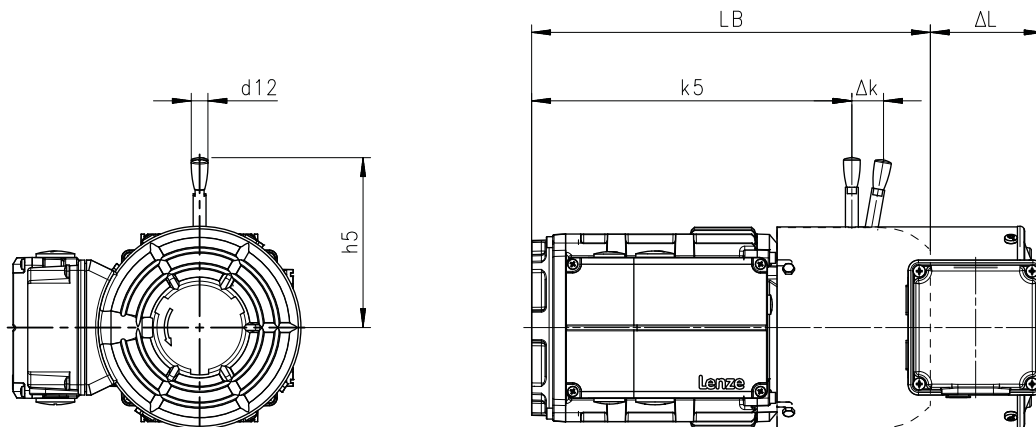

8801081_00

Motor	Brake	Dimensions			
		k_5	Δk	H_5	d_{12}
		mm	mm	mm	mm
m550-H63/S4 m550-H63/M4 m550-H63/L4	ABR 06	198	25	107	13
m550-H71/M4 m550-H71/L4	ABR 06	216	25	107	13
	ABR 08	217	27	116	13
m550-P80/M4	ABR 08	236	27	116	13
	ABR 10	250	30	132	13
m550-P90/M4 m550-P90/L4	ABR 08	275	27	116	13
	ABR 10	289	30	132	13
m550-P100/M4 m550-P100/L4	ABR 10	354	30	132	13
	ABR 12	355	37	161	13
m550-P112/M4	ABR 12	353	37	161	13

Dimensions LB ▶ [Basic dimensions](#) 54

Dimensions ΔL ▶ [Additional lengths](#) 84



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 double brake
Assignment of braking torques

8.2.6 Spring-applied application brake, IP54/IP55 double brake

Double brake

With the double brake, two application brakes are arranged one behind the other.

8.2.6.1 Assignment of braking torques

For optimum adaptation of the brake motor to the application, spring-applied brakes with several braking torques are available for each motor frame size.

Motor	Double brake		
	ABR 16	ABR 18	ABR 20
	Nm	Nm	Nm
m550-P160/M4	90	130	
m550-P160/L4	110	160	
m550-P180/M4		130	230
m550-P180/L4		200	

Product extensions

Spring-applied brakes


Spring-applied application brake, IP54/IP55 double brake

Rated data



8.2.6.2 Rated data

Switching times of the spring-applied brakes

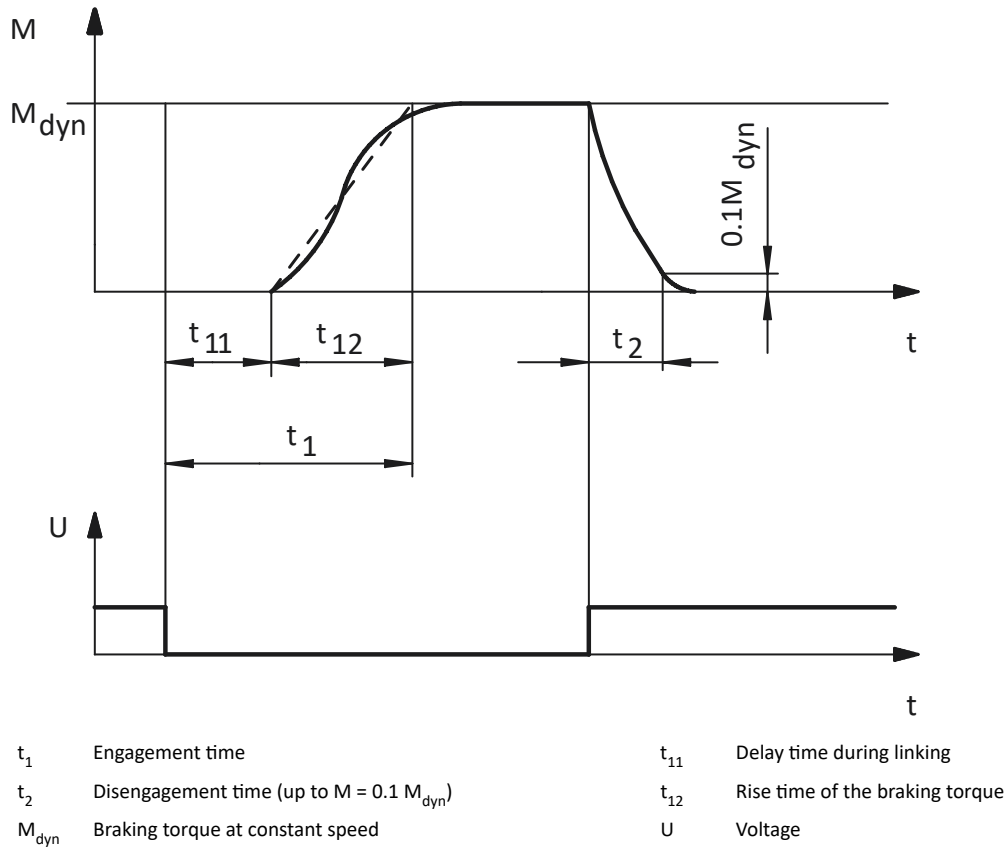



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 double brake
Rated data

Rated data, Double brake, IP54/55

Application brake ABR 16, ABR 18

Application brake		ABR 16				ABR 18					
Braking torque											
Standard friction lining	Nm	90		110		130		160		200	
Low-wear friction lining	Nm		90		110		130		160		200
Power input											
DC 24 V	W	110	110	110	110	170	170	170	170	170	170
DC 180 V	W	110	110	110	110	170	170	170	170	170	170
DC 205 V	W	112	112	112	112	170	170	170	170	170	170
DC 180 V ... 205 V	W	112	112	112	112	170	170	170	170	170	170
AC 115 V	W	112	112	112	112	170	170	170	170	170	170
AC 230 V	W	112	112	112	112	170	170	170	170	170	170
AC 400 V	W	110	110	110	110	170	170	170	170	170	170
AC 460 V	W	112	112	112	112	170	170	170	170	170	170
AC 400 V ... 460 V	W	112	112	112	112	170	170	170	170	170	170
Cold Brake AC 230V	W	112	112	112	112	170	170	170	170	170	170
Cold Brake AC 400V	W	110	110	110	110	170	170	170	170	170	170
Overexcitation AC 230 V	W	112	112	112	112	170	170	170	170	170	170
Overexcitation AC 400 V	W	110	110	110	110	170	170	170	170	170	170
Moment of inertia	kgcm ²	30	30	30	30	58	58	58	58	58	58
Braking torque is static	Nm	90	90	110	110	130	130	160	160	200	200
Min. static braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. static braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Dynamic braking torque											
100 rpm	Nm	90	90	110	110	130	130	160	160	200	200
1000 rpm	Nm	75	75	91	91	105	105	130	130	162	162
1200 rpm	Nm	73	73	89	89	103	103	126	126	158	158
1500 rpm	Nm	70	70	86	86	100	100	123	123	154	154
1800 rpm	Nm	69	69	85	85	98	98	120	120	150	150
2500 rpm	Nm	66	66	80	80	94	-	115	-	144	-
3000 rpm	Nm	64	64	78	78	91	-	112	-	140	-
3600 rpm	Nm	63	-	77	77	88	-	109	-	136	-
Min. dynamic braking torque tolerance	%	-25	-25	-25	-25	-25	-25	-25	-25	-25	-25
Max. dynamic braking torque tolerance	%	35	35	35	35	35	35	35	35	35	35
Friction energy											
100 rpm	kJ	72	72	72	72	120	120	120	120	120	120
1000 rpm	kJ	72	72	72	72	120	120	120	120	120	120
1200 rpm	kJ	72	72	72	72	120	120	120	120	120	120
1500 rpm	kJ	72	72	72	72	120	120	120	120	120	120
1800 rpm	kJ	72	72	72	72	120	72	120	72	120	72
2500 rpm	kJ	72	72	72	72	120	-	120	-	120	-
3000 rpm	kJ	72	22	72	22	120	-	120	-	120	-
3600 rpm	kJ	72	-	72	22	120	-	120	-	120	-
Maximum speed - operation	rpm	3600	3000	3600	3000	3600	1800	3600	1800	3600	1800
Maximum speed - idle state	rpm	10000	10000	10000	10000	10000	10000	10000	10000	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 double brake

Rated data



Rated data, Double brake, IP54/55

Application brake ABR 16, ABR 18

Application brake		ABR 16				ABR 18					
Braking torque											
Standard friction lining	Nm	90		110		130		160		200	
Low-wear friction lining	Nm		90		110		130		160		200
Delay time t11											
DC voltage	ms	72	72	59	59	35	35	77	77	64	64
AC mains voltage	ms	72	72	59	59	35	35	77	77	64	64
Cold Brake AC 230V	ms	157	157	129	129	101	101	145	145	126	126
Cold Brake AC 400V	ms	178	178	148	148	120	120	160	160	141	141
Overexcitation AC 230 V	ms	186	186	159	159	136	136	174	174	156	156
Overexcitation AC 400 V	ms	186	186	159	159	136	136	174	174	156	156
Rise time t12											
DC voltage	ms	25	25	30	30	35	35	20	20	45	45
AC mains voltage	ms	25	25	30	30	35	35	20	20	45	45
Cold Brake AC 230V	ms	55	55	66	66	101	101	38	38	89	89
Cold Brake AC 400V	ms	62	62	75	75	120	120	42	42	99	99
Overexcitation AC 230 V	ms	65	65	81	81	136	136	45	45	110	110
Overexcitation AC 400 V	ms	65	65	81	81	136	136	45	45	110	110
Engagement time t1											
DC voltage	ms	97	97	89	89	70	70	97	97	109	109
AC mains voltage	ms	97	97	89	89	70	70	97	97	109	109
Cold Brake AC 230V	ms	212	212	195	195	202	202	183	183	215	215
Cold Brake AC 400V	ms	240	240	223	223	240	240	202	202	240	240
Overexcitation AC 230 V	ms	251	251	240	240	272	272	219	219	266	266
Overexcitation AC 400 V	ms	251	251	240	240	272	272	219	219	266	266
Disengagement time t2											
DC voltage	ms	135	135	158	158	205	205	179	179	203	203
AC mains voltage	ms	135	135	158	158	205	205	179	179	203	203
Cold Brake AC 230V	ms	135	135	158	158	205	205	179	179	203	203
Cold Brake AC 400V	ms	104	104	118	118	139	139	129	129	143	143
Overexcitation AC 230 V	ms	86	86	95	95	103	103	101	101	110	110
Overexcitation AC 400 V	ms	86	86	95	95	103	103	101	101	110	110
Overexcitation time											
Cold Brake AC 230V	ms	1300	1300	1300	1300	1300	1300	1300	1300	1300	1300
Cold Brake AC 400V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 230 V	ms	300	300	300	300	300	300	300	300	300	300
Overexcitation AC 400 V	ms	300	300	300	300	300	300	300	300	300	300
Friction energy QBW											
DC voltage	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
AC mains voltage	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
Cold Brake AC 230V	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
Cold Brake AC 400V	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
Overexcitation AC 230 V	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
Overexcitation AC 400 V	MJ	515.8	1931.4	515.8	1931.4	716.4	3084.2	716.4	3084.2	716.4	3084.2
Wear limit of brake pad	MJ	3000	11260	3000	11260	2680	11560	2680	11560	2680	11560
Reversing cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶	1x 10 ⁶



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 double brake
Rated data

Rated data, Double brake, IP54/55

Application brake ABR 20

Application brake		ABR 20	
Braking torque			
Standard friction lining	Nm	230	
Low-wear friction lining	Nm		230
Power input			
DC 24 V	W	200	200
DC 180 V	W	200	200
DC 205 V	W	200	200
DC 180 V ... 205 V	W	200	200
AC 115 V	W	200	200
AC 230 V	W	200	200
AC 400 V	W	200	200
AC 460 V	W	200	200
AC 400 V ... 460 V	W	200	200
Cold Brake AC 230V	W	200	200
Cold Brake AC 400V	W	200	200
Overexcitation AC 230 V	W	200	200
Overexcitation AC 400 V	W	200	200
Moment of inertia	kgcm ²	146	146
Braking torque is static	Nm	230	230
Min. static braking torque tolerance	%	-25	-25
Max. static braking torque tolerance	%	35	35
Dynamic braking torque			
100 rpm	Nm	230	230
1000 rpm	Nm	182	182
1200 rpm	Nm	177	177
1500 rpm	Nm	173	173
1800 rpm	Nm	168	-
2500 rpm	Nm	161	-
3000 rpm	Nm	156	-
3600 rpm	Nm	152	-
Min. dynamic braking torque tolerance	%	-25	-25
Max. dynamic braking torque tolerance	%	35	35
Friction energy			
100 rpm	kJ	160	160
1000 rpm	kJ	160	160
1200 rpm	kJ	160	160
1500 rpm	kJ	160	48
1800 rpm	kJ	160	-
2500 rpm	kJ	160	-
3000 rpm	kJ	160	-
3600 rpm	kJ	160	-
Maximum speed - operation	rpm	3600	1500
Maximum speed - idle state	rpm	10000	10000

Product extensions

Spring-applied brakes

Spring-applied application brake, IP54/IP55 double brake

Rated data



Rated data, Double brake, IP54/55

Application brake ABR 20

Application brake		ABR 20	
Braking torque			
Standard friction lining	Nm	230	
Low-wear friction lining	Nm		230
Delay time t11			
DC voltage	ms	53	53
AC mains voltage	ms	53	53
Cold Brake AC 230V	ms	151	151
Cold Brake AC 400V	ms	173	173
Overexcitation AC 230 V	ms	195	195
Overexcitation AC 400 V	ms	195	195
Rise time t12			
DC voltage	ms	100	100
AC mains voltage	ms	100	100
Cold Brake AC 230V	ms	285	285
Cold Brake AC 400V	ms	326	326
Overexcitation AC 230 V	ms	368	368
Overexcitation AC 400 V	ms	368	368
Engagement time t1			
DC voltage	ms	153	153
AC mains voltage	ms	153	153
Cold Brake AC 230V	ms	436	436
Cold Brake AC 400V	ms	499	499
Overexcitation AC 230 V	ms	563	563
Overexcitation AC 400 V	ms	563	563
Disengagement time t2			
DC voltage	ms	181	181
AC mains voltage	ms	181	181
Cold Brake AC 230V	ms	181	181
Cold Brake AC 400V	ms	124	124
Overexcitation AC 230 V	ms	93	93
Overexcitation AC 400 V	ms	93	93
Overexcitation time			
Cold Brake AC 230V	ms	1300	1300
Cold Brake AC 400V	ms	300	300
Overexcitation AC 230 V	ms	300	300
Overexcitation AC 400 V	ms	300	300
Friction energy QBW			
DC voltage	MJ	949.4	4644.2
AC mains voltage	MJ	949.4	4644.2
Cold Brake AC 230V	MJ	949.4	4644.2
Cold Brake AC 400V	MJ	949.4	4644.2
Overexcitation AC 230 V	MJ	949.4	4644.2
Overexcitation AC 400 V	MJ	949.4	4644.2
Wear limit of brake pad	MJ	4740	23220
Reversing cycles		1x 10 ⁶	1x 10 ⁶
Repetitive cycles		1x 10 ⁶	1x 10 ⁶

Option: Reduction of the holding current (cold brake)

By reducing the holding current, the bridge/half-wave rectifier reduces the power consumption of the open brake. As the brake heats up less, this control is referred to as a "Cold Brake". This is necessary at low speeds in order to counteract impermissible heating. This means that no blower is required even with a speed setting range below 14 Hz. In addition, only a quarter of the braking power is required, thus saving energy.



Product extensions

Spring-applied brakes
Spring-applied application brake, IP54/IP55 double brake

Option: Short-time overexcitation of the brake coil


The disengagement time can be reduced by triggering the brake coil with twice the rated voltage for an overexcitation time. The brake releases much faster and the wear on the friction lining decreases. As a result of these features, this control variant is particularly ideal for hoist applications.

Option: Manual release

The brake can be ordered with a manual release lever to facilitate positioning and maintenance work. The brake can be released manually in deenergized mode by actuating the manual release lever.

A lockable manual release lever can be ordered as an option. This is equipped with a clamping device to hold the brake in the released position.

Double brake, degree of protection IP54/55

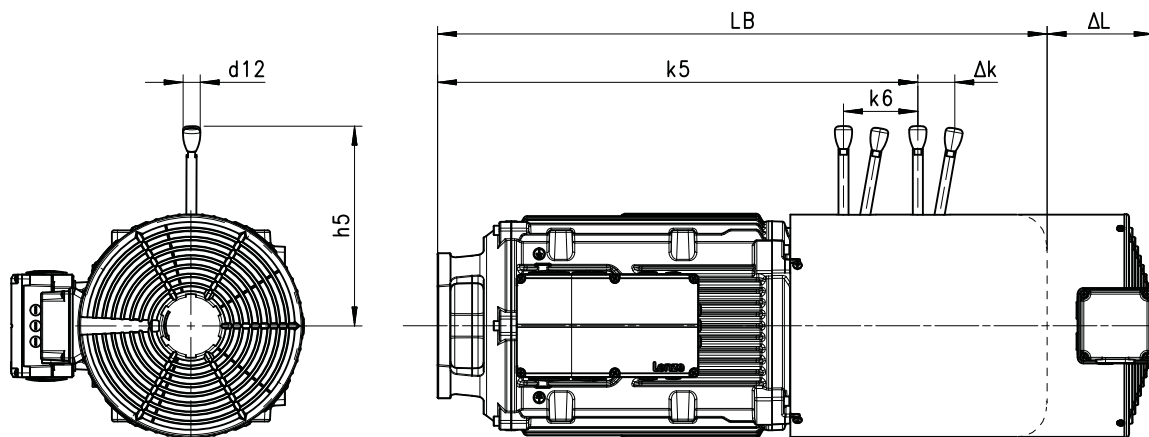

Motor	Brake	Dimensions				
		k_5	k_6	Δk	h_5	d_{12}
		mm	mm	mm	mm	mm
m550-P160/M4	ABR 16	560	93	45	240	24
	ABR 18	565	104	50	279	24
m550-P160/L4	ABR 18	565	104	50	279	24
m550-P180/M4	ABR 18	626	104	50	279	24
m550-P180/L4	ABR 20	632	118	58	319	24

Dimensions LB ► [Basic dimensions](#) 54

Dimensions ΔL ► [Additional lengths](#) 84

Product extensions

Spring-applied brakes
Spring-applied safety brake, IP54/IP55 single brake



8.2.7 Spring-applied safety brake, IP54/IP55 single brake

The spring-applied brakes are application brakes for use in safety applications.

ABRS1 spring-applied safety brakes achieve safety level SIL 1. These can be used together with the Safe Brake Control (SBC) function.

Preconditions

It should be noted that the safety brake is selected so that 80 % of the characteristic torque is sufficient for the safety-related function.

General information:

- The microswitch option is not protected
- The permissible ambient temperature is -20 to +40°C
- The relative humidity during operation must be < 85 % and must not be condensing
- Maintenance of these brakes must be carried out by Lenze Service

8.2.8 Spring-applied safety brake, IP54/IP55 double brake

The spring-applied brakes are application brakes for use in safety applications.

ABRS2 double brakes achieve safety level SIL1 or SIL2. These can be used together with the Safe Brake Control (SBC) function.

Preconditions

It should be noted that the safety brake is selected so that 80 % of the characteristic torque is sufficient for the safety-related function.

General information:

- The microswitch option is not protected
- The permissible ambient temperature is -20 to +40°C
- The relative humidity during operation must be < 85 % and must not be condensing
- Maintenance of these brakes must be carried out by Lenze Service



8.3 Feedback

NOTICE

Three-phase AC motors with feedback cannot be used for speed-dependent safety functions in conjunction with the SM 301 safety module.

The motor can be equipped with the following feedback systems for speed control via an inverter:

A resolver, incremental encoder and SinCos absolute value encoder are optionally available to evaluate the speed and position of the motor shaft.

The resolver can be used to measure an absolute value within one revolution of the rotor. A SinCos absolute value encoder is used if not only the angle within one revolution is to be made available immediately but also the revolution within a set range. The SinCos absolute value encoder detects not only the speed and rotor position but also the position of the machine. It consists of a speed sensor system, for example TTL, and an absolute value information recorder, for example Hyperface.

The HTL incremental encoder is used in the frequency inverter range for less dynamic applications.

The TTL incremental encoder can generate a higher number of pulses. It is used for dynamic applications with very high requirements regarding accuracy. If the absolute angular position of the drive is required directly after the system is switched on without performing additional homing, this can be realized via a resolver or SinCos absolute value encoder.



Resolver, absolute encoder and the IG128-24V-H add-on incremental encoder are mounted behind the B-bearing shield under the fan cover.

All other incremental encoders are integrated in the B-bearing shield, which usually makes the drive shorter.

Feedbacks in the environment of functional safety

Motors can perform speed-dependent safety functions for safe speed and/or safe relative position monitoring in a drive system by Lenze inverters or Controllers. In case of inverters, these functions are implemented by integrable safety modules and in case of Controllers by the additionally required Safety Controller.

When planning systems/installations of this kind, always observe the following:

- When using just one single feedback system in the environment of these safety applications, the applicable safety engineering standard EN 61800-5-2 (adjustable speed electrical power drive systems - Part: 5-2: Safety requirements - Functional) stipulates special requirements for the connection between feedback system and motor shaft.
- This is due to the fact that two-channel safety systems at this point in the mechanical system are actually designed as single-channel systems. If this mechanical connection is designed with considerable overdimensioning, the standard permits exclusion of the fault "encoder-shaft breakage" or "encoder-shaft slip". As such, the permissible angular acceleration limit values must not be exceeded for the individual drive solutions.

You can find the limit values in the corresponding feedback data of the individual motor ranges.



Speed-dependent safety functions

Examples of speed-dependent safety functions:

- Safe stop 1 (SS1)
- Safe operational stop (SOS)
- Safely limited speed (SLS)
- Safe maximum speed (SMS)
- Safe direction (SDI)
- Operation mode selector (OMS) with confirmation (ES)
- Safe speed monitor (SSM)
- Safely limited increment (SLI)

8.3.1 Resolver

The stator-supplied, 2-pole resolver with two stator windings shifted by 90 degrees and a rotor winding with a transformer winding can record both the speed and the rotor position, just like a single-turn absolute value encoder. The rotor position can be determined within one mechanical motor revolution after a voltage failure.

Feedback type			Resolver
Feedback			RS1
Speed-dependent safety functions			Nein
Design			Mounting
Resolution - angle		'	0.8
Min. accuracy		'	-10
Max. accuracy		'	10
Absolute positioning			1 revolution
Max. speed	$n_{\max}$	rpm	8000
Max. DC input voltage	$V_{\text{in,max}}$	V	10
Max. input frequency	$f_{\text{in,max}}$	kHz	4
Ratio stator/rotor			0.3
Min ratio tolerance		%	-5
Max ratio tolerance		%	5
Rotor impedance	Z_{ro}	Ω	51+j90
Stator impedance	Z_{so}	Ω	102+j150
Impedance	Z_{rs}	Ω	44+j76
Min. insulation resistance at DC 500 V	R_{min}	M Ω	10
Number of pole pairs			1
Max. angle error Min		'	-10
Max. angle error Max		'	10



8.3.2 Incremental encoder

Incremental encoders can be used for speed measurement. Homing is required in order to enable positioning later.

Incremental HTL encoder



Feedback in conjunction with the HAN plug connector or the integrated i550 motec and 8400 motec is only available with the IG128-24V-H add-on incremental encoder (with 0.5 m cable and M12 plug connector).

Feedback type			Encoder			
Feedback			IG128-24V-H		IG1024-24V-H	IG2048-24V-H
Design			Mounting	integrated	integrated	integrated
Pulses			128	128	1024	2048
Output signals			HTL	HTL	HTL	HTL
Interfaces			A, B	A, B	A, B; N; Ai, Bi; Ni	A, B; N; Ai, Bi; Ni
Absolute revolution			0	0	0	0
Min. accuracy		'	-22.5	-2	-2	-2
Max. accuracy		'	22.5	2	2	2
Min. DC input voltage	$V_{in,min}$	V	8	10	10	10
Max. DC input voltage	$V_{in,max}$	V	26	30	30	30
Max. current consumption	I_{max}	A	0.04	0.15	0.15	0.15
Cut-off frequency	f_{max}	kHz	30	200	200	200

TTL incremental encoder

Feedback type			Encoder	
Feedback			IG1024-5V-T	IG2048-5V-T
Design			integrated	
Pulses			1024	2048
Output signals			TTL	TTL
Interfaces			A, B; N; Ai, Bi; Ni	A, B; N; Ai, Bi; Ni
Absolute revolution			0	0
Min. accuracy		'	-2	-2
Max. accuracy		'	2	2
Min. DC input voltage	$V_{in,min}$	V	4.75	4.75
Max. DC input voltage	$V_{in,max}$	V	5.5	5.5
Max. current consumption	I_{max}	A	0.15	0.15
Cut-off frequency	f_{max}	kHz	300	300



SinCos-incremental encoder with safety functions



The connection of the safety sensors to the terminal box is only available in conjunction with a M23 connector.

Feedback type			Encoder	
Feedback			IG2048-5V-V2	IG2048-5V-V3
Design			Mounting	
Pulses			2048	2048
Output signals			SinCos 1 Vss	SinCos 1 Vss
Interfaces			SinCos	SinCos
Absolute revolution			0	0
Min. accuracy			-	-
Max. accuracy			-	-
Min. DC input voltage	$V_{in,min}$	V	4.75	4.75
Max. DC input voltage	$V_{in,max}$	V	5.25	5.25
Max. current consumption	I_{max}	A	0.07	0.07
Cut-off frequency	f_{max}	kHz	400	400
Max. Safety Integrity Level			SIL 2	SIL 3
Max. Safety Performance Level			d	e

8.3.3 Absolute value encoder

Absolute value encoders can detect the speed, the rotor position, and the machine position with a very high resolution. They are used for the positioning of dynamic applications and do not require homing.

SinCos absolute value encoder

Feedback type			SinCos absolute value encoder
Feedback			AM1024-8V-H
Speed-dependent safety functions			Nein
Design			Mounting
Encoder type			Multi-turn
Resolution		bit	-
Pulses			1024
Output signals			SinCos 1 Vss
Interfaces			Hiperface
Absolute revolution			4096
Resolution - angle			0.4
Min. accuracy		'	-0.8
Max. accuracy		'	0.8
Fehlergrenze Positionswert			
System accuracy			-
Integral nonlinearity			-
Min. DC input voltage	$V_{in,min}$	V	7
Max. DC input voltage	$V_{in,max}$	V	12
Max. current consumption	I_{max}	A	0.08
Cut-off frequency	f_{max}	kHz	200



8.4 Blower

The motor is optionally available with a blower for operation with the rated torque and low motor speeds or a higher switching frequency.

The blower cools the motor independent of the motor speed.

If a blower is used, the torque does not have to be reduced if operated below 20 Hz.



A higher powered motor with simultaneous derating can be used in many cases instead of a blower.

Torque reduction at low motor frequencies ► [General information](#)  22

Product extensions

Blower
Standard version



8.4.1 Standard version

Rated data 50Hz, 230/400V

Motor series			m550-H						m550-P		
Size			063			071			080		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	230	230	400	230	230	400	230	230	400
Rated power	P _{rated}	kW	0.030	0.010	0.010	0.033	0.014	0.014	0.034	0.017	0.017
Rated current	I _{rated}	A	0.14	0.09	0.05	0.15	0.09	0.05	0.15	0.09	0.05

Motor series			m550-P								
Size			090			100			112		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	230	230	400	230	230	400	230	230	400
Rated power	P _{rated}	kW	0.038	0.036	0.036	0.044	0.043	0.043	0.05	0.054	0.054
Rated current	I _{rated}	A	0.19	0.19	0.11	0.2	0.19	0.11	0.23	0.20	0.11

Motor series			m550-P								
Size			132			160			180		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	230	230	400	230	230	400	230	230	400
Rated power	P _{rated}	kW	0.089	0.082	0.082	0.210	0.205	0.205	0.210	0.205	0.205
Rated current	I _{rated}	A	0.39	0.34	0.19	0.92	0.70	0.40	0.92	0.70	0.40

Rated data 50Hz, 115/200V

Motor series			m550-H						m550-P		
Size			063			071			080		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	115	115	200	115	115	200	115	115	200
Rated power	P _{rated}	kW	0.039	0.037	0.037	0.043	0.041	0.041	0.043	0.043	0.043
Rated current	I _{rated}	A	0.60	0.59	0.34	0.63	0.62	0.35	0.59	0.59	0.34

Motor series			m550-P								
Size			090			100			112		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	115	115	200	115	115	200	115	115	200
Rated power	P _{rated}	kW	0.049	0.050	0.050	0.054	0.056	0.056	0.064	0.065	0.065
Rated current	I _{rated}	A	0.59	0.58	0.33	0.60	0.58	0.33	0.64	0.59	0.34



Rated data 60Hz, 115/200V

Motor series			m550-H						m550-P		
Size			063			071			080		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	115	115	200	115	115	200	115	115	200
Rated power	P _{rated}	kW	0.031	0.026	0.026	0.035	0.032	0.032	0.041	0.039	0.039
Rated current	I _{rated}	A	0.35	0.44	0.25	0.39	0.46	0.26	0.41	0.45	0.26

Motor series			m550-P								
Size			090			100			112		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	115	115	200	115	115	200	115	115	200
Rated power	P _{rated}	kW	0.052	0.051	0.051	0.064	0.063	0.063	0.083	0.081	0.081
Rated current	I _{rated}	A	0.49	0.47	0.27	0.58	0.49	0.28	0.74	0.54	0.31

Rated data 60Hz, 265/460V

Motor series			m550-H						m550-P		
Size			063			071			080		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	265	265	460	265	265	460	265	265	460
Rated power	P _{rated}	kW	0.046	0.012	0.012	0.049	0.018	0.018	0.053	0.023	0.023
Rated current	I _{rated}	A	0.18	0.09	0.05	0.19	0.09	0.05	0.21	0.09	0.05

Motor series			m550-P								
Size			090			100			112		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	265	265	460	265	265	460	265	265	460
Rated power	P _{rated}	kW	0.058	0.047	0.047	0.069	0.059	0.059	0.085	0.074	0.074
Rated current	I _{rated}	A	0.22	0.19	0.11	0.26	0.20	0.11	0.32	0.21	0.12

Motor series			m550-P								
Size			132			160			180		
Number of phases			1	3	3	1	3	3	1	3	3
Wiring			-	Delta	Star	-	Delta	Star	-	Delta	Star
Rated voltage	V _{rated}	V	265	265	460	265	265	460	265	265	460
Rated power	P _{rated}	kW	0.144	0.118	0.118	0.359	0.308	0.308	0.359	0.308	0.308
Rated current	I _{rated}	A	0.55	0.36	0.21	1.36	0.81	0.47	1.36	0.81	0.47

Product extensions

Blower
Heavy-duty blower



8.4.2 Heavy-duty blower

The heavy-duty blower is an optional fan design for operation in environments with higher dust and fiber contamination, e.g. in the textile industry.



Heavy-duty blowers have the same electrical data and dimensions as the standard design.



8.5 Temperature monitoring



The thermal sensors are integrated in the windings. We recommend the use of an additional motor protection switch.



Only one temperature monitoring device can be connected with the M23 8-pin and Han 10E/modular connectors.

The following temperature monitoring systems are available to protect the motor from overheating:

Connection via cable gland in the terminal box

- TCO thermal contact
- TCO thermal contact and PT1000 temperature sensor

Connection via M23 or Han connector

- TCO thermal contact
- Thermal detectors PT1000

8.5.1 Thermal contacts TCO

The TCO thermal contact (thermal break contact) is a bimetallic switch. The thermal contact monitors the motor winding temperature; e.g., at excessively high temperatures, it switches the upstream motor relay. The motor is disconnected from the line voltage and coasts down via the relay.

Functional principle			Normally-closed contact
Operating temperature		°C	150
Min. switching temperature		°C	145
Max. switching temperature		°C	155
Min. reset temperature		°C	90
Max. reset temperature		°C	135
Max. AC switching current		A	2.5
Max. AC switching voltage		V	250
Max. DC switching current		A	2.5
Max. DC switching voltage		V	12




8.5.2 Thermal detectors PT1000

The thermal detector used continuously monitors the motor temperature. The temperature information is transferred to the inverter using the system cable of the feedback system. **This is not a full motor protection!**

This makes it possible to determine the motor temperature in the permissible operating range with great accuracy.



When supplying the thermal sensors with a measurement current of 1 mA, the relationship between the temperature and the resistance measured applies.

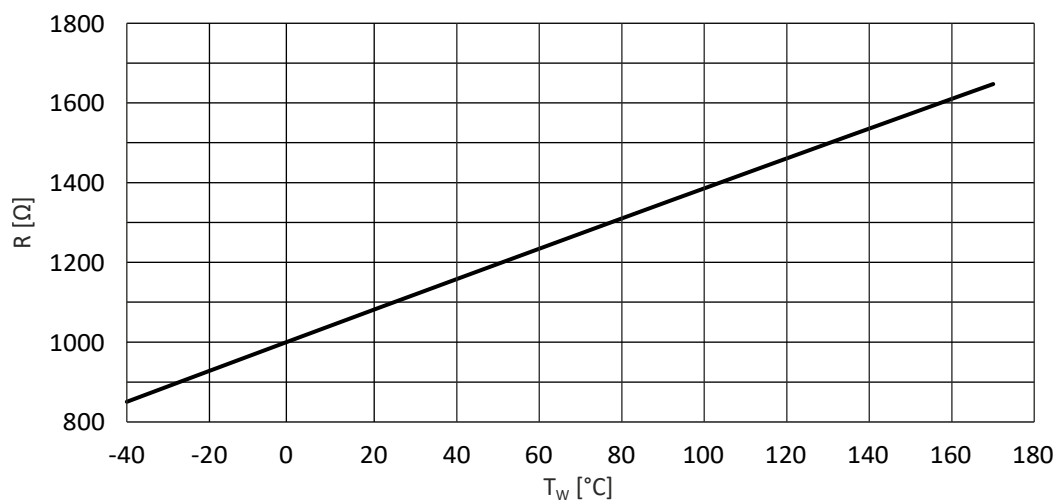


R Resistance
 T_w Winding temperature



8.6 Protection cover

If the motor is installed vertically with the shaft end pointing down, a protection cover is recommended for the fan cover to prevent any foreign bodies falling into the fan.

Protection cover for self-ventilated motors

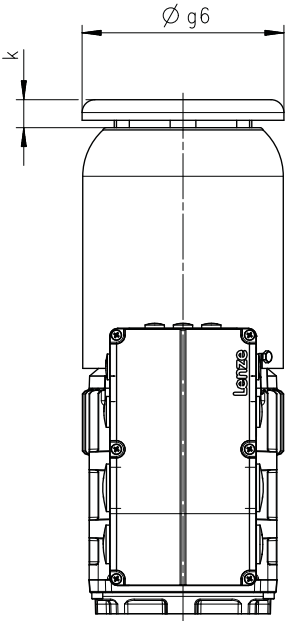


8801079_00

Motor series			m550-H		m550-P						
Motor			63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Additional length	k	mm	25	25	25	25	30	30	30	35	35
Diameter	g ₆	mm	124	138	157	177	196	218	260	310	348



Protection cover for forced ventilation motors

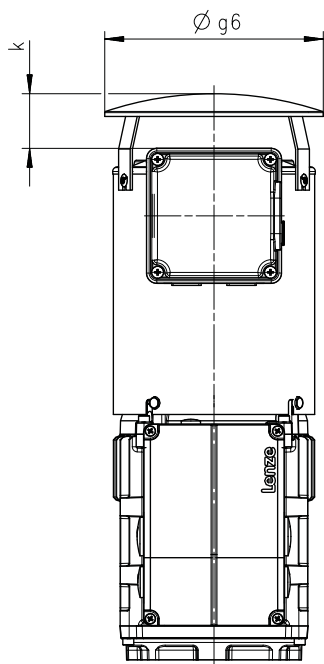


8801083_00

Motor series			m550-H		m550-P						
Motor			63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4	160/M4 160/L4	180/M4 180/L4
Additional length	k	mm	32	32	32	32	32	42	56	56	56
Diameter	g ₆	mm	133	150	170	188	210	249	300	338	338



8.7 Second shaft end

The second motor shaft end on the drive side is intended for customer applications (e.g. further feedback systems).

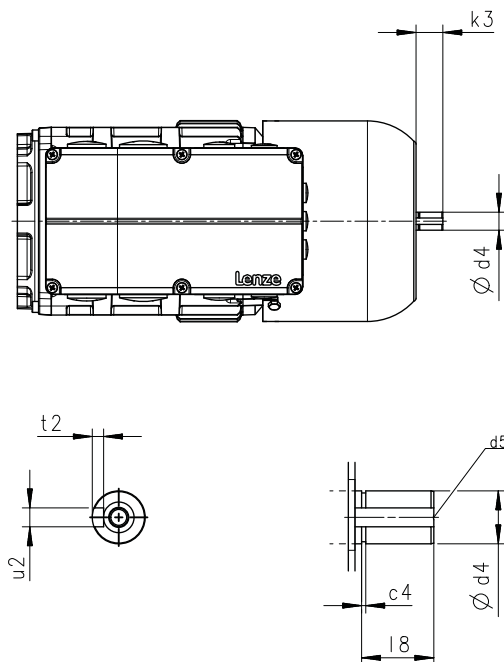

8801082_00

Motor series			m550-H		m550-P				
Motor			63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4
Shaft length	k_3	mm	18	18	20.5	24	28	28	32.5
Shaft diameter	d_4	mm	14	14	14	14	14	14	25
	l_8	mm	15	15	19	19	23	23	27
	c_4	mm	1.1	1.1	1.1	1.1	1.1	1.1	
Keyway width	u_2	mm	5	5	5	5	5	5	8
Keyway depth	t_2	mm	3	3	3	3	3	3	4.5
	d_5		M5	M5	M5	M5	M5	M5	M10




8.8 Handwheel

In a deenergized state or during emergency operation, the motor shaft can be rotated with the hand wheel and the machine can be set up.

The hand wheel is made of a light alloy and has a smooth surface.



Pay attention to the higher moment of inertia during configuration! With frequent switching operations, in particular when changing the direction of rotation, please contact your Lenze representative.

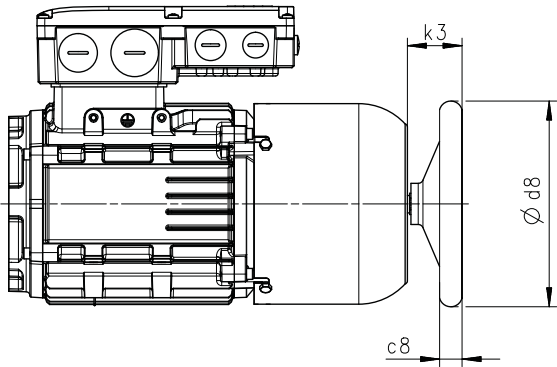

8801080_00

Motor		m550-H		m550-P				
		63/S4 63/M4 63/L4	71/M4 71/L4	80/M4	90/M4 90/L4	100/M4 100/L4	112/M4	132/M4 132/L4
Dimensions								
k ₃	mm	29	40	40	40	45	45	50
d ₈	mm	80	160	160	160	200	200	250
c ₈	mm	14	18	18	18	22	22	26
Moment of inertia								
J	kgcm ²	0.6	18.5	18.5	18.5	25.8	25.8	155.4



9 Product codes

Motor product code

Example		M	55	B	H	063	S	04	5	E	0	0	C	C
Product type	Motor	M												
Product family			55											
Version				B										
Efficiency class	IE2				H									
	IE3				P									
Size						063 071 080 090 100 112 132 160 180								
Overall length	Short						S							
	Medium						M							
	Long						L							
Number of poles	4-pole							04						
Degree of protection	IP54/IP55								5					
	IP65/IP66								6					
Cooling	Self-ventilation									E				
	Forced ventilation									F				
Brake	Without										0			
	Spring-applied brakes										F			
Feedback	Without											0		
	Absolute value encoder											A		
	Incremental encoder											E		
	Resolver											R		
Approvals	None												N	
	CE												C	
	CE, CCC												3	
	CE, cULus												L	
	CE, cULus, CCC												5	
	CE, cURus												U	
	CE, cURus, CCC												W	
Design type	Internal key													C



10 Environmental notes and recycling

Lenze products are intended for use by companies in industrial environments. This means that they are also subject to requirements regarding recycling and disposal. Both mechanical and electrical components such as electric motors, gearboxes, and inverters contain valuable raw materials that can be recycled and reused. Proper recycling is important and sensible from both an economic and ecological perspective.

For information on the proper disposal and legal requirements of our products, please refer to the information on the respective product page on the Internet:

<https://www.lenze.com/en-de/products>

If you require support, please contact your local branch:

<https://www.lenze.com/en-de/company/global-presence>

Note: By disposing of devices and packaging properly, you are helping us to protect the environment and conserve resources.



Further information on Lenze's environmental and climate responsibility and on the topic of energy efficiency can be found on the Internet:

<https://www.lenze.com/en-de/company/sustainability>



11 Appendix

11.1 Good to know

11.1.1 Operating modes of the motor

Operating modes S1 ... S10 as specified by EN 60034-1 describe the basic stress of an electrical machine.

In continuous operation a motor reaches its permissible temperature limit if it outputs the rated power dimensioned for continuous operation. However, if the motor is only subjected to load for a short time, the power output by the motor may be greater without the motor reaching its permissible temperature limit. This behaviour is referred to as overload capacity.

Depending on the duration of the load and the resulting temperature rise, the required motor can be selected reduced by the overload capacity.

The most important operating modes

Continuous operation S1	Short-time operation S2
Operation with a constant load until the motor reaches the thermal steady state. The motor may be actuated continuously with its rated power.	Operation with constant load; however, the motor does not reach the thermal steady state. During the following standstill, the motor winding cools down to the ambient temperature again. The increase in power depends on the load duration.



Intermittent operation S3	Non-intermittent periodic operation S6
Sequence of identical duty cycles comprising operation with a constant load and subsequent standstill. Start-up and braking processes do not have an impact on the winding temperature. The steady-state is not reached. The guide values apply to a cycle duration of 10 minutes. The power increase depends on the cycle duration and on the load period/downtime ratio.	Sequence of identical duty cycles comprising operation with a constant load and subsequent no-load operation. The motor cools down during the no-load phase. Start-up and braking processes do not have an impact on the winding temperature. The steady-state is not reached. The guide values apply to a cycle duration of 10 minutes. The power increase depends on the cycle duration and on the load period/idle time ratio.
P Power t Time t_L Idle time θ Temperature	P_V Power loss t_B Load period t_S Cycle duration

11.1.2 Enclosures

The protection class indicates the suitability of a product for specific ambient conditions with regard to humidity as well as the protection against contact and the ingress of foreign particles. The protection classes are classified in the EN IEC 60034-5/EN IEC 60529.

The first code number after the code letters IP indicates the protection against the ingress of foreign particles and dust. The second code number refers to the protection against the ingress of humidity.

Code number 1	Degree of protection	Code number 2	Degree of protection
0	No protection	0	No protection
1	Protection against the ingress of foreign particles $d > 50$ mm. No protection in case of deliberate access.	1	Protection against vertically dripping water (dripping water).
2	Protection against medium-sized foreign particles, $d > 12$ mm, keeping away fingers or the like.	2	Protection against diagonally falling water (dripping water), 15° compared to normal service position.
3	Protection against small foreign particles $d > 2.5$ mm. Keeping away tools, wires or the like.	3	Protection against spraying water, up to 60° from vertical.
4	Protection against granular foreign particles, $d > 1$ mm, keeping away tools, wire or the like.	4	Protection against spraying water from all directions.
5	Protection against dust deposits (dust-protected), complete protection against contact.	5	Protection against water jets from all directions.
6	Protection against the ingress of dust (dust-proof), complete protection against contact.	6	Protection against choppy seas or heavy water jets (flood protection).

Lenze SE

Postfach 101352 · 31763 Hameln
Hans-Lenze-Straße 1 · 31855 Aerzen
GERMANY

Hannover HRB 204803
Phone +49 5154 82-0
sales.de@lenze.com
www.lenze.com